

ASSA ABLOY

ASSA ABLOY, the global leader in door opening solutions



Maiman doors can be found in such locations as:

HOTELS

Plaza Hotel, New York City
Fairmont Hotel, San Francisco, CA
Renaissance Hotel, Glendale, AZ

HOSPITALS

Medical Center of the Rockies, Fort Collins, CO
Kingman Medical Center, Tempe, AZ
Baylor Medical Center, Plano, TX

UNIVERSITIES

Yale University
Harvard University
Princeton University

SCHOOLS

Hotchkiss School, Lakeville, CT
Georgetown High, Washington DC
Princeton Elementary, Orlando, FL

www.maiman.com

ASSA ABLOY, the global leader in door opening solutions



Classic Stile and Rail Wood Doors


Fire-rated up to 90 minutes

Certified for Chain of Custody, Recycled Content, and No Added Urea-Formaldehyde

Available in endless combinations of panel designs and wood species

Installed in thousands of locations, including the Old Executive Office Building, Caesars Palace, Torrey Pines, the San Francisco War Memorial Opera House, and the corporate offices of Time Warner

Historic Replications

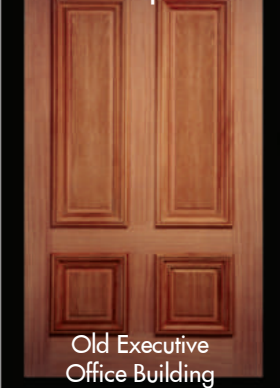

Old Executive Office Building

Fire-Rated Wood Jamb



French Doors



Immaculate Conception Church

www.maiman.com

ASSA ABLOY, the global leader in door opening solutions

Thermal Fused Flush Doors

Fire-Rated up to 90 minutes

Will not delaminate or telegraph

PVC edgebanding on all four edges,
sealing out moisture

Available in hundreds of faces











Certified for Chain of Custody, Recycled
Content, and No Added Urea-Formaldehyde

1 3/4" or 1 3/8" Thickness

Low cost



Maiman's 12 Standard Faces: *(swatches below may not represent exact colors; please request a sample for accuracy)*



www.maiman.com

ASSA ABLOY, the global leader in door opening solutions



LEED

LEED CATEGORY	LEED CREDIT	LEED DESCRIPTION	THERMAL FUSED	STILE AND RAIL
Materials and Resources	4.1	10% Recycled Content	Qualifies 85% recycled content SCS certified	Qualifies 60-70% recycled content SCS certified
Materials and Resources	4.2	20% Recycled Content	Qualifies 85% recycled content SCS certified	Qualifies 60-70% recycled content SCS certified
Materials and Resources	5.1	10% of Materials Extracted, Processed, & Manufactured Regionally	Qualification varies dependent on project location & availability of material within 500 mile radius of Springfield, MO	Qualification varies dependent on project location & availability of material within 500 mile radius of Springfield, MO
Materials and Resources	5.2	20% of Materials Extracted, Processed, & Manufactured Regionally	Qualification varies dependent on project location & availability of material within 500 mile radius of Springfield, MO	Qualification varies dependent on project location & availability of material within 500 mile radius of Springfield, MO
Materials and Resources	7	Certified Wood	FSC Chain of Custody SCS-COC-001865	FSC Chain of Custody SCS-COC-001865
Indoor Environmental Quality	4.4	Low-Emitting Materials: Composite Wood & Agrifiber Products	Qualifies No Aded Urea-Formaldehyde	Qualifies No Aded Urea-Formaldehyde

THERMAL FUSED SPECIFICATIONS

Meets or exceeds these industry standards	WDMA IS-1A ANSI-A208.1, min. grade M2 NEMA LD 3-2000 LMA.2003 - Decorative Overlay ASTM E 90-99, STC Testing ASTM F-476, Security Testing
Fire-Ratings	20, 45, 60, & 90 Minutes
Thickness	1 3/8" or 1 3/4"
Maximum Dimensions	48" x 108"
Faces Available	Hundreds of different NEER VENEER™ faces

STILE AND RAIL SPECIFICATIONS

Meets or exceeds these industry standards	WDMA AWI
Fire-Ratings	20, 45, 60, & 90 Minutes
Minimum Thickness	1 3/4" for nonrated-60-minute 2 1/4" for 90-minute
Maximum Dimensions	48" x 108" for nonrated/20-minute 42" x 96" for 45-90-minute
Species Available	Hundreds of different wood species



www.maiman.com