


11 31 00/ELE
BuyLine 7200



Appliance Specifications

 **Electrolux** | **ICON**[®]

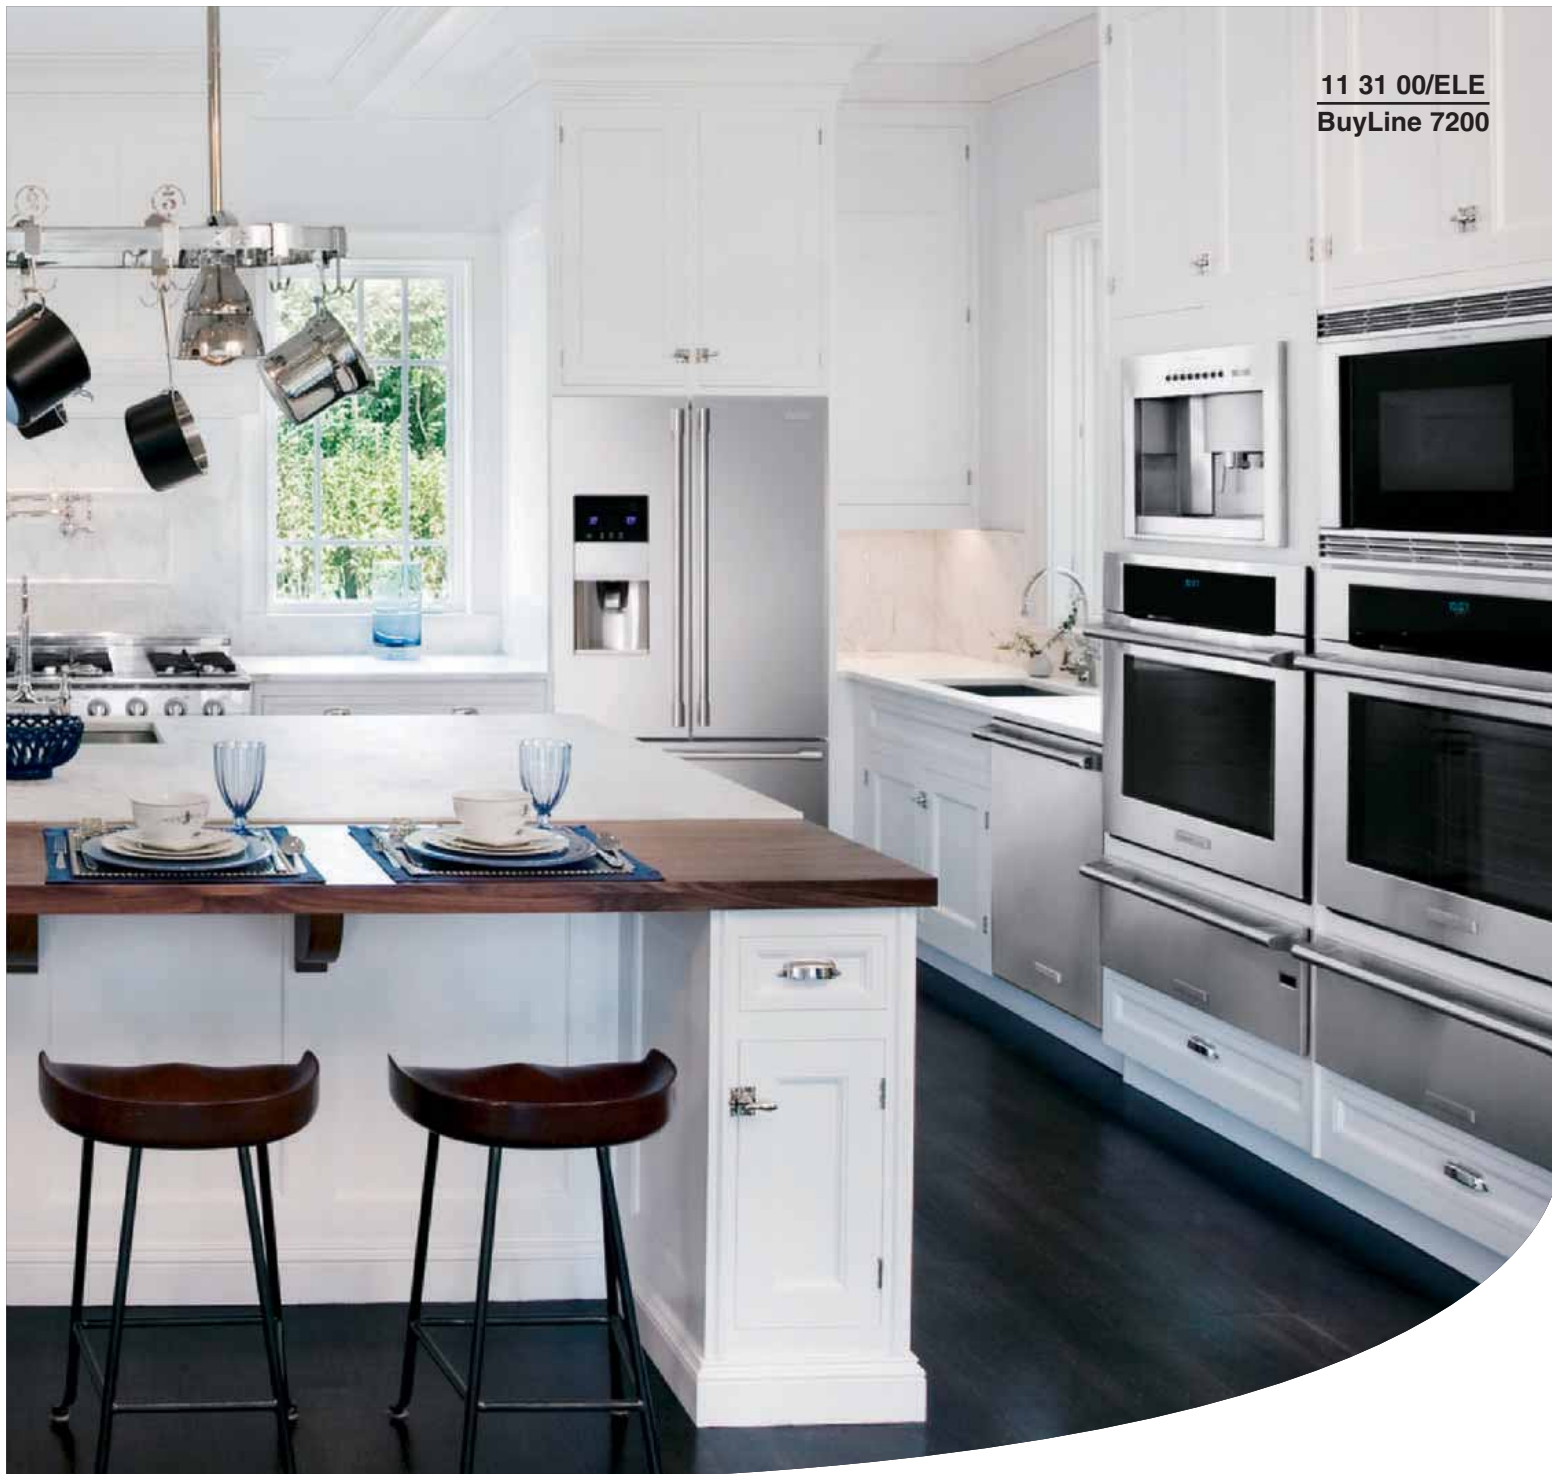

Signature Features

Wave-Touch™ Control Panel Technology

Envision a control panel that allows you to plan how and when your meal will be cooked. One simple touch activates the control panel, providing you with access to all operating functions. After you've programmed the settings, the inactive lights fade away — along with your worries.

Smooth-Glide™ Oven Racks

Imagine oven racks that glide with unparalleled ease and extend fully for effortless access to your meal. Designed with a centered easy-grip handle and a patented ball bearing rack system for smooth-gliding performance with the touch of a finger.

Custom Temp Drawer™

Features 9 preset selections including White/Sparkling Wine, Fish/Shellfish, Snacks and Chilled Beer, plus three customizable "My Favorites," giving you an array of choices to store or serve whatever you want at the ideal temperature.

Cool-Touch™ Oven Door

Introducing the coolest oven door in the industry, literally. The cool-to-the-touch all glass door design has an expansive glass front panel that allows you to clearly see what you are cooking. And because it is all glass, when it comes time for cleanup, spills and splatters wipe up with ease.

Perfect Ice™


Enjoy filtered, restaurant-quality ice in a new thoughtfully designed shape.

Theater Lighting

Transition lighting gradually illuminates the interior with soft but ample light as you open the door.

PureAdvantage® Filtration Systems

Our filtration system keeps clean, filtered air circulated throughout to prevent odor transfer and keeps fresh, clean water and ice at your fingertips.

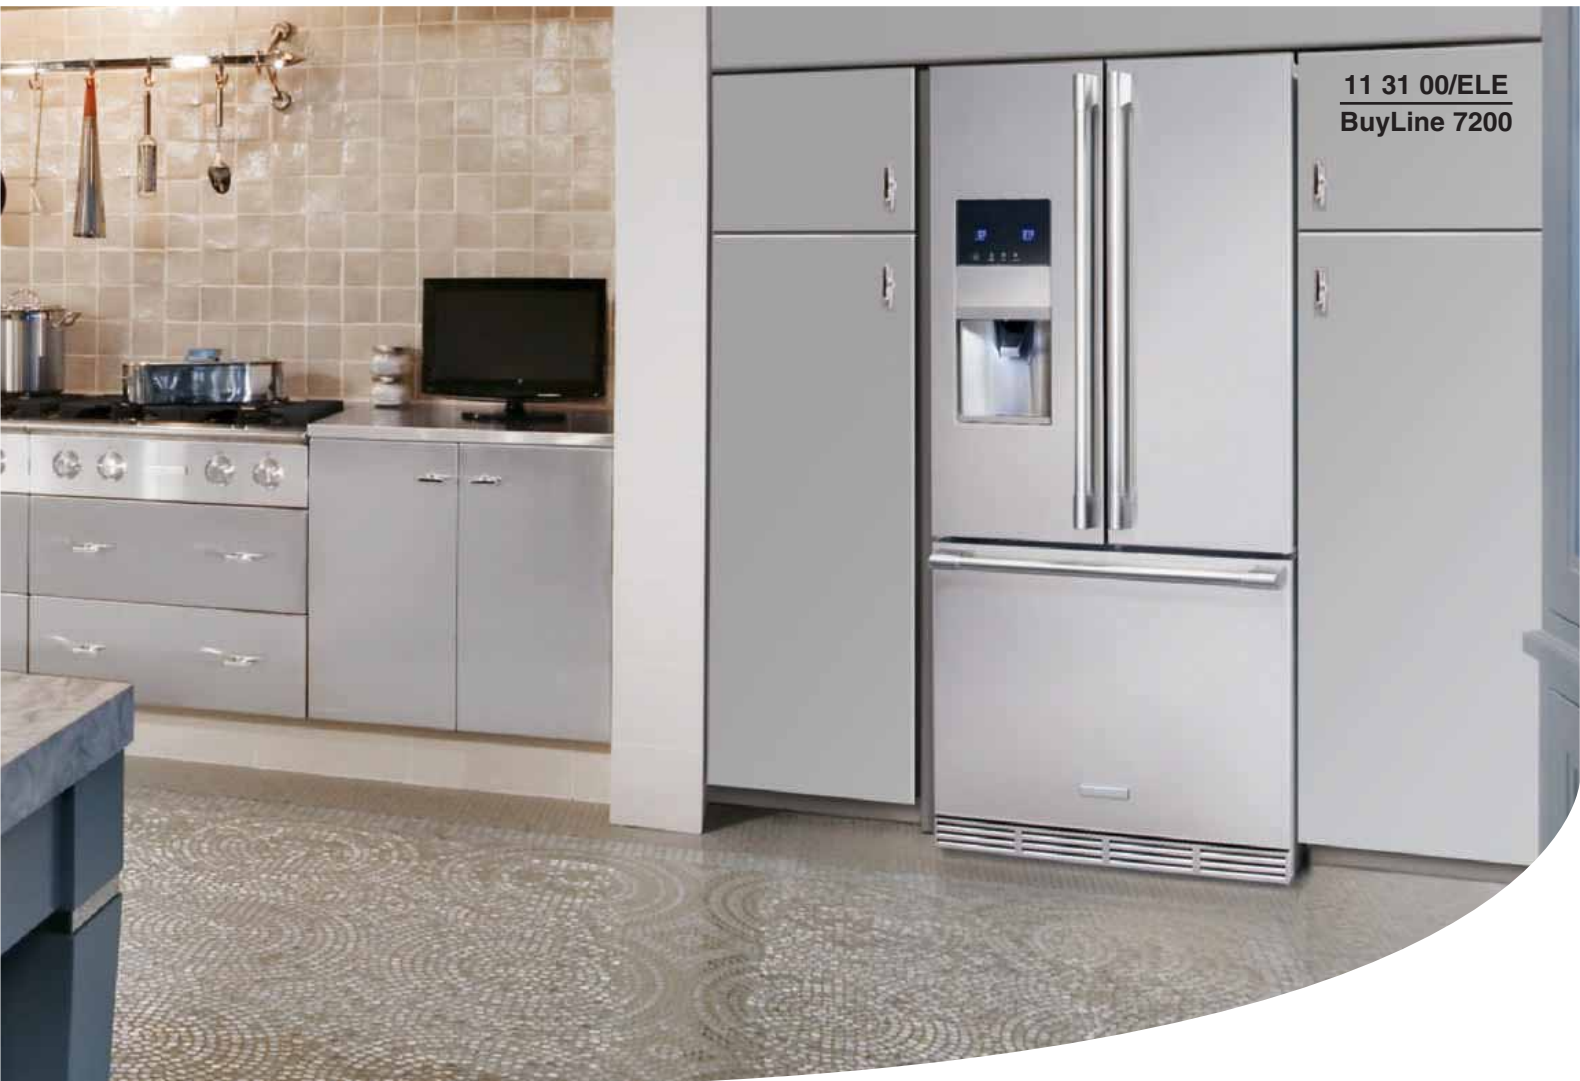

The difference between creating a house they'll want to come home to and one they'll never want to leave.

The Electrolux ICON® series of appliances can help turn a house into a home, a kitchen into a living room. That's because each appliance has been designed for optimal performance and aesthetic detail: racks move with the touch of a finger, cooking surfaces are unobtrusive and clean easily, touch panels disappear, and refrigerators and dishwashers work quietly. Available in a bold Professional Series and a graceful Designer Series, Electrolux ICON® appliances can help you create kitchens people will never want to leave.

For more than 80 years Electrolux appliances have graced the kitchens of fine European homes and restaurants. For more information, or to view the Electrolux ICON® series on the web, visit electroluxicon.com.

Dual-Fuel Freestanding Ranges

Full-Gas Freestanding Ranges

Signature Features

Freestanding Ranges

Smooth-Glide™ Oven Racks

Fully extending oven racks with a centered easy-grip handle make access to oven contents safe and easy. Patented ball bearing rack system allows racks to glide effortlessly.

Min-2-Max™ Burners

Burner configuration includes two versatile Min-2-Max™ sealed burners delivering anywhere from 18,000 to 450 BTUs. Thanks to the double ring configuration, you can simmer sauces or bring water to a boil. You decide the level of heat output by a simple turn of the knob.

Sealed Rangetop

One look says it all. This superior gas-through ceramic glass surface is durable, smooth and easy to clean. The glass ceramic surface easily buffs to a glossy shine. Imagine the beauty this sleek, glistening rangetop will bring to your kitchen.

Third Element European Convection System

By adding a third cooking element and a convection fan, heat is distributed evenly throughout the oven. Cooking every meal to perfection has never been easier.



**36" Dual-Fuel
Freestanding Range**
professional series
E48DF76EPS



**36" Full-Gas
Freestanding Range**
professional series
E36GF76HPS



**36" Dual-Fuel
Freestanding Range**
professional series
E36DF76GPS



**30" Full-Gas
Freestanding Range**
professional series
E30GF74HPS



**30" Dual-Fuel
Freestanding Range**
professional series
E30DF74GPS

| Freestanding Ranges | E48DF76EPS | E36DF76GPS | E30DF74GPS | E36GF76HPS | E30GF74HPS |
|---|-------------------|-------------------|-------------------|-------------------|-------------------|
| Series | professional | professional | professional | professional | professional |
| Type | Dual Fuel | Dual Fuel | Dual Fuel | Full Gas* | Full Gas |
| Nominal Width | 48" | 36" | 30" | 36" | 30" |
| Overall Dimensions | | | | | |
| Height (min. – max. includes adjustable legs) | 38-1/2" – 41-5/8" | 41-5/8" – 42-5/8" | 41-5/8" – 42-5/8" | 41-5/8" – 42-5/8" | 41-5/8" – 42-5/8" |
| Width | 47-15/16" | 35-7/8" | 29-7/8" | 35-7/8" | 29-7/8" |
| Depth (including handle) (with 90° door open) | 31" | 28-3/4" – 47-3/8" | 28-5/8" – 45-1/2" | 28-1/2" – 47-3/8" | 28-1/2" – 45-1/2" |
| Cutout Dimensions | | | | | |
| Height (min.) (stand.) | 35-3/4" – 36" | 35-3/4" – 36" | 35-3/4" – 36" | 35-3/4" – 36" | 35-3/4" – 36" |
| Width | 48-1/8" | 36-1/16" | 30-1/16" | 36-1/16" | 30-1/16" |
| Depth (min.) (max.) | 24" – 24" | 24" – 24-1/2" | 24" – 24-1/2" | 24" – 24-1/2" | 24" – 24-1/2" |

*Natural Gas Only.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.

Electric Wall Ovens



30" Electric Double Wall Oven
professional series
E30EW85GPS



30" Electric Double Wall Oven
designer series
E30EW85GSS



30" Electric Single Wall Oven
professional series
E30EW75GPS



30" Electric Single Wall Oven
designer series
E30EW75GSS

For more information on
Electrolux ICON® premium appliances,
visit us at electroluxicon.com

Signature Features

Electric Wall Ovens

Wave-Touch™ Control Panel Technology

A simple touch, anywhere on the panel, lights oven controls and provides access to all oven functions. This allows easy programming while keeping activated functions lighted for easy monitoring.

Smooth-Glide™ Oven Racks

Fully extending oven racks with a centered easy-grip handle make access to oven contents safe and easy. Patented ball bearing rack system allows racks to glide effortlessly.

Multi-Option Cooking with Temperature Probe

Seven cooking modes with eight functions for essential versatility. The temperature probe monitors the cooking progress and automatically indicates when the meat is precisely cooked.

CustomConvection™ Convection System

A third cooking element using a variable-speed technology fan, when combined with temperature setting options, provides premium performance with more cooking choices.

Warmer Drawers



30" Warmer Drawer
professional series
E30WD75GPS



30" Warmer Drawer
designer series
E30WD75GSS



30" Warmer Drawer
panel ready
E30WD75GTT

Signature Feature

Warmer Drawers

Smooth-Glide™ Full-Extension Warmer Drawer

Drawer slides in and out with ease, extending completely and safely for convenient access to prepared foods.

Electric Wall Ovens

| | | | |
|----------------------------------|------------|----------|---------|
| Series | | | |
| Nominal Width | 30" Double | | |
| Sabbath Mode (Star-K® Certified) | Yes | Yes | Yes |
| A.D.A. Compliant† | | | Yes |
| Overall Dimensions | | | |
| Height | 52-9/16" | 52-9/16" | 29-1/4" |
| Width | 30" | 30" | 30" |
| Depth (to door front) | 24-5/8" | 24-5/8" | 24-5/8" |
| (with 90° door open) | 47-7/8" | 47-7/8" | 47-7/8" |
| Cutout Dimensions | | | |
| Height (min.) | 51-7/16" | 51-7/16" | 28-1/2" |
| (max.) | 52-3/16" | 52-3/16" | 28-7/8" |
| Width (min.) | 28-1/2" | 28-1/2" | 28-1/2" |
| (max.) | 29" | 29" | 29" |
| Depth (min.) | 24" | 24" | 24" |

E30EW85GPS

| | |
|----------------------------------|--------------|
| Series | professional |
| Nominal Width | 30" Double |
| Sabbath Mode (Star-K® Certified) | Yes |
| A.D.A. Compliant† | |
| Overall Dimensions | |
| Height | 52-9/16" |
| Width | 30" |
| Depth (to door front) | 24-5/8" |
| (with 90° door open) | 47-7/8" |
| Cutout Dimensions | |
| Height (min.) | 51-7/16" |
| (max.) | 52-3/16" |
| Width (min.) | 28-1/2" |
| (max.) | 29" |
| Depth (min.) | 24" |

E30EW85GSS

| | |
|----------------------------------|------------|
| Series | designer |
| Nominal Width | 30" Double |
| Sabbath Mode (Star-K® Certified) | Yes |
| A.D.A. Compliant† | |
| Overall Dimensions | |
| Height | 52-9/16" |
| Width | 30" |
| Depth (to door front) | 24-5/8" |
| (with 90° door open) | 47-7/8" |
| Cutout Dimensions | |
| Height (min.) | 51-7/16" |
| (max.) | 52-3/16" |
| Width (min.) | 28-1/2" |
| (max.) | 29" |
| Depth (min.) | 24" |

E30EW75GPS

| | |
|----------------------------------|--------------|
| Series | professional |
| Nominal Width | 30" Single |
| Sabbath Mode (Star-K® Certified) | Yes |
| A.D.A. Compliant† | Yes |
| Overall Dimensions | |
| Height | 29-1/4" |
| Width | 30" |
| Depth (to door front) | 24-5/8" |
| (with 90° door open) | 47-7/8" |
| Cutout Dimensions | |
| Height (min.) | 28-1/2" |
| (max.) | 28-7/8" |
| Width (min.) | 28-1/2" |
| (max.) | 29" |
| Depth (min.) | 24" |

E30EW75GSS

| | |
|----------------------------------|------------|
| Series | designer |
| Nominal Width | 30" Single |
| Sabbath Mode (Star-K® Certified) | Yes |
| A.D.A. Compliant† | Yes |
| Overall Dimensions | |
| Height | 29-1/4" |
| Width | 30" |
| Depth (to door front) | 24-5/8" |
| (with 90° door open) | 47-7/8" |
| Cutout Dimensions | |
| Height (min.) | 28-1/2" |
| (max.) | 28-7/8" |
| Width (min.) | 28-1/2" |
| (max.) | 29" |
| Depth (min.) | 24" |

Warmer Drawers

| | | | |
|---------------------------|---------|---------|----------------------|
| Series | | | |
| Nominal Width | 30" | | |
| A.D.A. Compliant† | Yes | Yes | Yes |
| Overall Dimensions | | | |
| Height | 11-1/4" | 11-1/4" | 10-3/4" |
| Width | 30" | 30" | 29" |
| Depth (to drawer front) | 23-3/8" | 23-3/8" | 23-3/8** |
| (including handle) | 44-1/8" | 44-1/8" | (handle is optional) |
| Cutout Dimensions | | | |
| Height (min.) | 9-7/8" | 9-7/8" | 9-7/8" |
| (max.) | 10-1/4" | 10-1/4" | 10-1/4" |
| Width (min.) | 28-1/2" | 28-1/2" | 28-1/2" |
| (max.) | 28-3/4" | 28-3/4" | 28-3/4" |
| Depth (min.) | 23-5/8" | 23-5/8" | 23-5/8" |
| (max.) | 24" | 24" | 24" |

E30WD75GPS

| | |
|---------------------------|--------------|
| Series | professional |
| Nominal Width | 30" |
| A.D.A. Compliant† | Yes |
| Overall Dimensions | |
| Height | 11-1/4" |
| Width | 30" |
| Depth (to drawer front) | 23-3/8" |
| (including handle) | 44-1/8" |
| Cutout Dimensions | |
| Height (min.) | 9-7/8" |
| (max.) | 10-1/4" |
| Width (min.) | 28-1/2" |
| (max.) | 28-3/4" |
| Depth (min.) | 23-5/8" |
| (max.) | 24" |

E30WD75GSS

| | |
|---------------------------|----------|
| Series | designer |
| Nominal Width | 30" |
| A.D.A. Compliant† | Yes |
| Overall Dimensions | |
| Height | 11-1/4" |
| Width | 30" |
| Depth (to drawer front) | 23-3/8" |
| (including handle) | 44-1/8" |
| Cutout Dimensions | |
| Height (min.) | 9-7/8" |
| (max.) | 10-1/4" |
| Width (min.) | 28-1/2" |
| (max.) | 28-3/4" |
| Depth (min.) | 23-5/8" |
| (max.) | 24" |

E30WD75GTT

| | |
|---------------------------|----------------------|
| Series | panel ready |
| Nominal Width | 30" |
| A.D.A. Compliant† | Yes |
| Overall Dimensions | |
| Height | 10-3/4" |
| Width | 29" |
| Depth (to drawer front) | 23-3/8** |
| (including handle) | (handle is optional) |
| Cutout Dimensions | |
| Height (min.) | 9-7/8" |
| (max.) | 10-1/4" |
| Width (min.) | 28-1/2" |
| (max.) | 28-3/4" |
| Depth (min.) | 23-5/8" |
| (max.) | 24" |

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.

*Custom panel and handle not included with panel-ready model.

†When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

Gas Slide-In Cooktops

Gas Cooktops

Signature Features

Slide-In Cooktops

Min-2-Max™ Burners

Burner configuration includes two versatile Min-2-Max™ sealed burners delivering anywhere from 18,000 to 450 BTUs. Thanks to the double ring configuration, you can simmer sauces or bring water to a boil. You decide the level of heat output by a simple turn of the knob.

Continuous Grates

Continuous grates spread weight over a broad area, providing an ultrastable cook surface.

Sealed Cooktop Spill-Basin

Cleanup is convenient with a black porcelain-coated area beneath the burners to catch spills.

Expandable, Flexible Six Element Configuration

Concentric rings and bridge elements are clearly marked on the surface. Combinations allow the user to cook with a variety of pan shapes and sizes at up to 4400 watts.



48" Gas Slide-In Cooktop
E48GC76EPS



36" Gas Slide-In Cooktop
E36GC76GPS



36" Gas Slide-In Cooktop
E36GC75GSS



30" Gas Slide-In Cooktop
E30GC74GPS



36" Gas Deep-Sump Cooktop
E36GC70FSS



30" Gas Deep-Sump Cooktop
E30GC70FSS

Electric Slide-In Cooktop



36" Electric Slide-In Cooktop
E36EC75HSS

For more information on Electrolux ICON® premium appliances, visit us at electroluxicon.com

| Slide-In Cooktops | E48GC76EPS | E36GC76GPS | E30GC74GPS | E36GC75GSS | E36EC75HSS |
|-------------------------------------|------------|-------------|-------------|-------------|-------------|
| Nominal Width | 48" | 36" | 30" | 36" | 36" |
| Type | Gas | Gas | Gas | Gas | Electric |
| A.D.A. Compliant † | | Yes | Yes | Yes | Yes |
| Overall Dimensions | | | | | |
| Height | 7-3/4" | 7-3/4" | 7-3/4" | 7-3/4" | 7-3/4" |
| Width | 48" | 35-7/8" | 29-7/8" | 35-7/8" | 35-7/8" |
| Depth | 26-1/2" | 25" | 25" | 25-3/4" | 25-3/4" |
| Cutout Dimensions | | | | | |
| Height (beneath countertop surface) | 7-3/4" | 7-1/2" | 7-1/2" | 7-1/2" | 7-1/2" |
| Width (at back) | 46" | 35-3/16" | 29-3/16" | 35-3/16" | 35-3/16" |
| Width (at front) | 48" | 35-15/16" | 29-15/16" | 35-15/16" | 35-15/16" |
| Depth (from back to notch) | 22" | 22-1/8" | 22-1/8" | 22" | 22" |
| Depth (of notch) | 3" max. | 1-1/8" max. | 1-1/8" max. | 1-1/8" max. | 1-1/8" max. |

†When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.



Induction Cooktops



36" Induction Cooktop
E36IC80ISS



30" Induction Cooktop
E30IC80ISS



36" Induction Cooktop
E36IC75FSS



30" Induction Cooktop
E30IC75FSS

Electric Cooktops



36" Electric Cooktop
E36EC65ESS



30" Electric Cooktop
E30EC65ESS



36" Electric Touch-Control Cooktop
E36EC70FSS



30" Electric Touch-Control Cooktop
E30EC70FSS

Signature Features Cooktops

Power Assist™

Power Assist™ enables rapid heat acceleration with an immediate 25% increase in power. So, you'll bring large pots to a boil faster than ever before while minimizing energy consumption.

Cook Surface Sensors

The Infinite™ Cooking System creates heat only after sensing a pan* on the cooking surface. The cooking surface diameters respond to both the presence and precise size of a pan. The heat is transferred directly to the pan so the cooktop surface remains cool enough to clean up.

Sleek Design

These cooktops connect with your countertop in virtual seamlessness for a sleek, consistent, flush-mount look.

Custom-Set™ Touch-Controls

The smooth cooktop surface is undisturbed with knobs for a look that is sleek and flush with your countertop.

| Cooktops | E36GC70FSS | E30GC70FSS | E36IC80ISS | E30IC80ISS | E36IC75FSS | E30IC75FSS | E36EC65ESS | E30EC65ESS | E36EC70FSS | E30EC70FSS |
|--|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Nominal Width | 36" | 30" | 36" | 30" | 36" | 30" | 36" | 30" | 36" | 30" |
| Type | Gas | Gas | Induction | Induction | Induction | Induction | Electric | Electric | Electric | Electric |
| A.D.A. Compliant ¹ | Yes | | Yes | Yes | | | Yes | Yes | Yes | Yes |
| Overall Dimensions | | | | | | | | | | |
| Height | 4-1/4" | 4-1/4" | 4-3/8" | 4-3/8" | 4-3/8" | 4-3/8" | 4" | 4" | 5" | 5" |
| Width | 36" | 30" | 36-3/4" | 30-3/4" | 36-3/4" | 30-3/4" | 36-3/4" | 30-3/4" | 36-3/4" | 30-3/4" |
| Depth | 21-3/4" | 21-3/4" | 21-1/2" | 21-1/2" | 21-1/2" | 21-1/2" | 21-1/2" | 21-1/2" | 21-1/2" | 21-1/2" |
| Cutout Dimensions | | | | | | | | | | |
| Height (min. beneath countertop surface) | 8" | 8" | 4-1/2" | 4-1/2" | 4-1/2" | 4-1/2" | 6" | 6" | 5" | 5" |
| Width (min.) | 33-7/8" | 27-1/4" | 35-7/8" | 29-5/8" | 35-7/8" | 29-5/8" | 35-5/8" | 29-5/8" | 35-7/8" | 29-7/8" |
| Width (max.) | 34-1/4" | 28-1/2" | 36" | 29-3/4" | 36" | 29-3/4" | 36" | 30" | 36" | 30" |
| Depth (min.) | 19-1/8" | 19-1/8" | 20-3/8" | 20-3/8" | 20-3/8" | 20-3/8" | 20-1/4" | 20-1/4" | 20-1/4" | 20-1/8" |
| Depth (max.) | 19-3/4" | 19-3/4" | 20-1/2" | 20-1/2" | 20-1/2" | 20-1/2" | 20-1/2" | 20-1/2" | 20-1/4" | 20-1/4" |

¹Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.

¹When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

Built-In Microwaves

High-Speed Ovens



30" Built-In Microwave
professional series
E30MO75HPS



30" High-Speed Oven
professional series
E30SO75FPS



30" High-Speed Oven
designer series
E30SO75ESS



30" Built-In Microwave
designer series
E30MO75HSS

Over-The-Range Microwaves



30" Over-The-Range Microwave
professional series
E30MH65GPS



30" Built-In Convection Microwave
designer series
E30MO65GSS



30" Over-The-Range Microwave
designer series
E30MH65GSS

Signature Features

Microwave Ovens

Wave-Touch™ Control Panel Technology

A simple touch, anywhere on the panel, lights oven controls and provides access to all oven functions. This allows easy programming while keeping activated functions lighted for easy monitoring.

Auto Sensor Cooking

Moisture and humidity are detected, which adjusts the cooking time and power level for various foods and quantities.

Convection Cooking

Hot air is circulated throughout the oven cavity to brown and crisp foods evenly. Oven can be programmed for ten convection cooking temperatures from 100° to 450°F.

Automatic Cooking Options

Pre-programmed settings that make it easy to cook with both convection heat and microwave automatically.

High-Speed Cooking Option

Forcing heated air at ultrahigh speeds over the surface of meats, High-Speed Cooking rapidly sears in moisture and flavor and produces a beautifully browned, delicately crisp exterior. When combined with the microwave function, cooking time is reduced by 50%.

For more information on Electrolux ICON® premium appliances, visit us at electroluxicon.com

| Microwave Ovens | E30MO75HPS | E30MO75HSS | E30MO65GSS* | E30SO75FPS | E30SO75ESS | E30MH65GPS | E30MH65GSS |
|---------------------------|--------------|------------|-------------|--------------|------------|--------------|------------|
| Series | professional | designer | designer | professional | designer | professional | designer |
| Nominal Width | 30" | 30" | 30" | 30" | 30" | 30" | 30" |
| Overall Dimensions | | | | | | | |
| Height | 22" | 22" | 21-23/32" | 22-7/8" | 22-7/8" | 16-7/8" | 16-7/8" |
| Width | 30" | 30" | 30" | 30" | 30" | 29-7/8" | 29-7/8" |
| Depth | 21-11/16" | 21-11/16" | 20-29/32" | 23-5/8" | 23-5/8" | 16-1/8" | 16-1/8" |
| Cutout Dimensions | | | | | | | |
| Height (min.) | 21" | 21" | 19-7/8" | 21-3/8" | 21-3/8" | 30" | 30" |
| Height (max.) | 21-1/2" | 21-1/2" | 20-3/8" | 21-7/8" | 21-7/8" | | |
| Width (min.) | 28-1/2" | 28-1/2" | 26-1/2" | 22-3/8" | 22-3/8" | 16-1/2" | 16-1/2" |
| Width (max.) | 29" | 29" | 27" | 22-7/8" | 22-7/8" | | |
| Depth (min.) | 20-1/8" | 20-1/8" | 20-1/8" | 22-3/4" | 22-3/4" | 12" | 12" |

*30" Trim Kit (E30MO65TMK) is supplied and includes Stainless Steel Faceplate, Exhaust Duct Assembly and Bottom Duct Assembly - shipped in separate box.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.

Chimney Vent Hoods



40" Island Hood
E40PV100FS




36" Wall-Mount Hood
E36WV100FS



36" Glass Canopy Wall-Mount Hood
RH36WCT6GS



Glass Canopy Island Hood
RH42PC60GS (42")
RH36PC60GS (36")

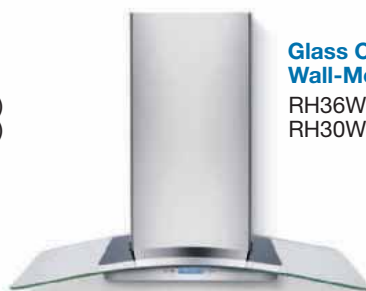

Glass Canopy Wall-Mount Hood
RH36WC60GS (36")
RH30WC60GS (30")

Signature Features

Ventilation

Wave-Touch™ Control Panel Technology

A simple touch, anywhere on the panel, lights controls and provides access to all functions. This allows easy programming while keeping activated functions lighted for easy monitoring.

Infinite-Speed Blower Control

The ultraquiet blower allows you to dial in the precise airflow needed.

Halogen Lighting with Dimmer Control

Overhead halogen bulbs evenly illuminate the cooking surface and provide abundant light to enhance the cooking experience.

Intelligent Heat Sensor

The ventilation system that is designed to work in concert with your cooktop or range. As the cooking surface temperature increases, the blower fan automatically starts.

Dishwasher Safe Filters

Saturated filters can be rinsed and cycled through the dishwasher. The stainless steel filter provides strength and durability not found in foam filters.

| Ventilation | E36WV100FS | RH36WC60GS | RH36WCT6GS | RH30WC60GS | RH42PC60GS | E40PV100FS | RH36PC60GS |
|--|---------------|--------------------|------------|---------------------|----------------------|----------------------|----------------------|
| Nominal Width | 36" | 36" | 36" | 30" | 42" | 40" | 36" |
| Type | Wall Mount | Wall Mount | Wall Mount | Wall Mount | Island/ Peninsula | Island/ Peninsula | Island/ Peninsula |
| Air Delivery (CFM) | 1000 | 600 | 600 | 600 | 600 | 1000 | 600 |
| Overall Dimensions | | | | | | | |
| Height (min. w/ one cover) | 28-1/8" | 29-7/16" | 16-1/2" | 29-7/16" | 28" | 27-9/16" | 28" |
| Height (min. – max. w/ flue extension) | 33" – 48-5/8" | 30-1/8" – 54-9/16" | 36" | 27-3/16" – 54-9/16" | 35" – 57" | 33" – 41-9/16" | 35" – 57" |
| Width | 36" | 35-7/8" | 35-7/16" | 29-7/8" | 41-7/8" | 39-3/8" | 35-7/8" |
| Depth | 24" | 19-11/16" | 19-11/16" | 19-11/16" | 25-3/16" | 27-9/16" | 25-3/16" |

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.



Canopy Vent Hoods

18" Wall-Mount Canopy Hood
E488WV120S (48")
E368WV60ES (36")

9" Wall-Mount Canopy Hood
E36WV60EPS (36")
E30WV60EPS (30")

Downdraft Vents



Downdraft Vents
E36DD75ESS (36")
E30DD75ESS (30")

| Ventilation | E488WV120S | E368WV60ES | E36WV60EPS | E30WV60EPS | E36DD75ESS | E30DD75ESS |
|---------------------------|------------|------------|------------|------------|-------------------------|-------------------------|
| Nominal Width | 48" | 36" | 36" | 30" | 36" | 30" |
| Type | Wall Mount | Wall Mount | Wall Mount | Wall Mount | Retractable | Retractable |
| Air Delivery (CFM) | 1200 | 600 | 600 | 600 | 1600 | 1600 |
| Overall Dimensions | | | | | | |
| Height | 18" | 18" | 9" | 9" | 40" (includes 10" rise) | 40" (includes 10" rise) |
| Width | 47-7/8" | 35-7/8" | 35-7/8" | 29-7/8" | 36" | 30" |
| Depth | 26-7/8" | 26-7/8" | 24" | 24" | 3-27/32" | 3-27/32" |
| Cutout Dimensions | | | | | | |
| Height | 18" | 18" | 9" | 9" | 30" | 30" |
| Width | 48" | 36" | 36" | 30" | 33-3/4" | 27-3/4" |
| Depth | 11-7/8" | 11-7/8" | 11-7/8" | 11-7/8" | 2-1/8" | 2-1/8" |

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.

Refrigerators

Signature Features

Refrigerators

Custom Temp Drawer™

Features 9 preset selections including White/Sparkling Wine, Fish/Shellfish, Snacks and Chilled Beer, plus three customizable “My Favorites,” giving you an array of choices to store or serve whatever you want at the ideal temperature.

Custom-Design™ Organization System

Our tri-level freezer organization system features three Smooth-Glide™ baskets with removable dividers and top removable baskets, so you can keep food organized and easily at hand.

Twice the Ice

You get filtered, restaurant-quality ice featuring a new drink-friendly shape, twice the ice as any refrigerator ice maker¹ — up to 9 pounds in 24 hours.

Theatre Lighting

Transition lighting that is so thoughtfully designed that it gradually illuminates the interior of the refrigerator with soft but ample light.

PureAdvantage® Filtration Systems

Our filtration system keeps clean, filtered air circulated throughout to prevent odor transfer and keeps fresh, clean water and ice at your fingertips.

Smooth-Glide™ Full-Extension System

Crispers, deli drawer and freezer basket slide in and out with ease, extending completely for convenient access to stored food.

¹Under normal conditions – 0°F freezer, 37° F fresh food and based on bottom freezer models with exterior ice and water and a suggested MSRP greater than \$2700.



Counter-Depth French Door Refrigerator

professional series
E23BC78IPS



Counter-Depth French Door Refrigerator

designer series
E23BC78ISS



Counter-Depth Refrigerator*

professional series
E23CS78HPS



Counter-Depth Refrigerator*

designer series
E23CS78HSS

*Shown with optional Louvered Trim Kit (4480)

Counter-Depth Refrigerators

| | |
|----------------------------------|--------------|
| Series | professional |
| Type | French Door |
| Capacity | 23 Cu. Ft. |
| ENERGY STAR® | Yes |
| Sabbath Mode (Star-K® Certified) | Yes |

Overall Dimensions

| | |
|----------------------------------|----------|
| Height (including hinge/rollers) | 69-1/2" |
| Width | 35-5/8" |
| Depth (including handle) | 29-1/2" |
| (with 90° door open) | 42-9/16" |
| (with drawer fully extended) | 44-1/2" |

Cutout Dimensions

| | |
|--|---------------------|
| Built-In Installation (H x W x D) | 70-1/4" x 36" x 25" |
| Louvered Trim Kit Installation – PN # 4480 (H x W x D) | |
| Collar Kit Installation – PN # ECK23CDS (H x W x D) | |

E23BC78IPS

| | |
|----------------------------------|--------------|
| Series | professional |
| Type | French Door |
| Capacity | 23 Cu. Ft. |
| ENERGY STAR® | Yes |
| Sabbath Mode (Star-K® Certified) | Yes |

| | |
|----------------------------------|----------|
| Height (including hinge/rollers) | 69-1/2" |
| Width | 35-5/8" |
| Depth (including handle) | 29-1/2" |
| (with 90° door open) | 42-9/16" |
| (with drawer fully extended) | 44-1/2" |

| | |
|-----------------------------------|---------------------|
| Built-In Installation (H x W x D) | 70-1/4" x 36" x 25" |
|-----------------------------------|---------------------|

E23BC78ISS

| | |
|----------------------------------|-------------|
| Series | designer |
| Type | French Door |
| Capacity | 23 Cu. Ft. |
| ENERGY STAR® | Yes |
| Sabbath Mode (Star-K® Certified) | Yes |

| | |
|----------------------------------|----------|
| Height (including hinge/rollers) | 69-1/2" |
| Width | 35-5/8" |
| Depth (including handle) | 29-1/2" |
| (with 90° door open) | 42-9/16" |
| (with drawer fully extended) | 44-1/2" |

| | |
|-----------------------------------|---------------------|
| Built-In Installation (H x W x D) | 70-1/4" x 36" x 25" |
|-----------------------------------|---------------------|

E23CS78HPS

| | |
|--------------|---------------|
| Series | professional |
| Type | Counter-Depth |
| Capacity | 23 Cu. Ft. |
| ENERGY STAR® | Yes |

| | |
|----------------------------------|----------|
| Height (including hinge/rollers) | 69-5/16" |
| Width | 35-5/8" |
| Depth (including handle) | 29-1/2" |
| (with 90° door open) | 45-1/4" |

| | |
|-----------------------------------|---------------------|
| Built-In Installation (H x W x D) | 70-1/4" x 36" x 25" |
|-----------------------------------|---------------------|

E23CS78HSS

| | |
|--------------|---------------|
| Series | designer |
| Type | Counter-Depth |
| Capacity | 23 Cu. Ft. |
| ENERGY STAR® | Yes |

| | |
|----------------------------------|----------|
| Height (including hinge/rollers) | 69-5/16" |
| Width | 35-5/8" |
| Depth (including handle) | 29-1/2" |
| (with 90° door open) | 45-1/4" |

| | |
|-----------------------------------|---------------------|
| Built-In Installation (H x W x D) | 70-1/4" x 36" x 25" |
|-----------------------------------|---------------------|

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.



42" Built-In Refrigerator

professional series
E42BS75EPS



42" Built-In Panel-Ready Refrigerator

panel ready
E42BS75ETT

Optional Coordinated Trim Kits

Order to create built-in integrated look for counter-depth refrigerator models E23CS78HPS and E23CS78HSS.

Collar Kit (ECK23CDS)

Includes side and top trim pieces.

Louvered Trim Kit (4480)

Includes louvered top grille, side and top trim pieces.

42" Built-In Refrigerators

| | |
|---------------|--------------|
| Series | professional |
| Nominal Width | 42" |
| Type | Built In |

Overall Dimensions

| | |
|--------------------------|---------|
| Height | 84" |
| Width | 42" |
| Depth (including handle) | 26-7/8" |
| (with 90° door open) | 47-7/8" |

Cutout Dimensions

| | |
|---------------|---------|
| Height (min.) | 83-1/2" |
| (max.) | 84-1/2" |
| Width | 41-1/2" |
| Depth | 24" |

E42BS75EPS

| | |
|---------------|--------------|
| Series | professional |
| Nominal Width | 42" |
| Type | Built In |

| | |
|--------------------------|---------|
| Height | 84" |
| Width | 42" |
| Depth (including handle) | 26-7/8" |
| (with 90° door open) | 47-7/8" |

E42BS75ETT

| | |
|---------------|-------------|
| Series | panel ready |
| Nominal Width | 42" |
| Type | Built In |

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.

All Freezer / All Refrigerator



All Freezer*
professional series
E32AF75FPS

Built-In Side-by-Side Configuration



Shown with optional coordinated Double Louvered Trim Kit (DUORSRKIT).

*All Freezer shown with optional coordinated Single Louvered Trim Kit (SFRRSRKIT) and All Refrigerator shown with optional coordinated Single Louvered Trim Kit (SRRRSRKIT).



All Refrigerator*
professional series
E32AR75FPS

Signature Features

All Freezer / All Refrigerator

Theatre Lighting

Transition lighting that is so thoughtfully designed that it gradually illuminates the interior of the refrigerator and freezer with soft but ample light.

Smooth-Glide™ Full-Extension System

Crispers with adjustable slide in and out with ease, extending completely for convenient access to stored food.

All Freezer / All Refrigerator

| | |
|--------------|--------------|
| Series | professional |
| Type | All Freezer |
| Capacity | 17 Cu. Ft. |
| ENERGY STAR® | Yes |

Overall Dimensions

| | |
|---|-----------------------------|
| Height (Cabinet) | 65-1/8" |
| (Cabinet including optional Trim Kit Riser) | 69-1/4" min. – 70-1/4" max. |
| Width | 32" |
| Depth (including door) | 26-3/4" |
| (with 90° door open) | 57-1/4" |

Cutout Dimensions (Single Units)

| | |
|---|--------------------------|
| Built-In Installation (HxWxD) | 66" x 33" x 25-1/4" min. |
| Louvered Trim Kits Installation – PN# SFRRSRKIT / PN# SRRRSRKIT (HxWxD) | 79" x 33" x 25-1/4" min. |

Cutout Dimensions (Double Unit)

| | |
|--|--------------------------|
| Built-In Installation (HxWxD) | 66" x 66" x 25-1/4" min. |
| Louvered Trim Kit Installation – PN# DUORSRKIT (HxWxD) | 79" x 66" x 25-1/4" min. |

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.

E32AF75FPS

| | |
|--------------|------------------|
| Series | professional |
| Type | All Refrigerator |
| Capacity | 17 Cu. Ft. |
| ENERGY STAR® | Yes |

| | |
|---|-----------------------------|
| Height (Cabinet) | 65-1/8" |
| (Cabinet including optional Trim Kit Riser) | 69-1/4" min. – 70-1/4" max. |
| Width | 32" |
| Depth (including door) | 26-3/4" |
| (with 90° door open) | 57-1/4" |

| | |
|---|--------------------------|
| Built-In Installation (HxWxD) | 66" x 33" x 25-1/4" min. |
| Louvered Trim Kits Installation – PN# SFRRSRKIT / PN# SRRRSRKIT (HxWxD) | 79" x 33" x 25-1/4" min. |

| | |
|--|--------------------------|
| Built-In Installation (HxWxD) | 66" x 66" x 25-1/4" min. |
| Louvered Trim Kit Installation – PN# DUORSRKIT (HxWxD) | 79" x 66" x 25-1/4" min. |

Optional Coordinated Trim Kits

Single Louvered Trim Kits (SFRRSRKIT and SRRRSRKIT)

For single All-Freezer and All-Refrigerator installation. Includes louvered top grille and vented, louvered toe kick, 4" riser with leveling system and side / top trim pieces.

Double Louvered Trim Kit (DUORSRKIT)

For All-Freezer / All-Refrigerator side-by-side installation. Includes full-width, louvered top grille and vented, louvered toe kick, two 4" risers with leveling systems and side / top trim pieces.

Built-In Dishwashers

Signature Features

Built-In Dishwashers

UltraQuiet Plus™ Sound Insulation Package

The dishwasher is wrapped in dense insulation that envelops the sides, top and toe kick, then enclosed in a steel shroud which reduces sound to a whisper.

Versatile Racking System

Designed for maximum capacity and flexibility, the tall-tub design features a versatile racking system including adjustable tines and stemware holders. There is also an adjustable / removable top rack for the utmost flexibility when washing large items.



Built-In Dishwasher
professional series
EDW7505HPS



Built-In Dishwasher
designer series
EDW7505HSS

Built-In Dishwashers

| | |
|---------------|--------------|
| Series | professional |
| Nominal Width | 24" |
| Type | Built In |
| ENERGY STAR® | Yes |

Overall Dimensions

| | |
|-----------------------|-------------------|
| Height (adjustable) | 33-7/8" – 34-7/8" |
| Width | 23-3/4" |
| Depth (to door front) | 24-5/8" |
| (with 90° door open) | 49-7/8" |

Cutout Dimensions

| | |
|---------------|-----|
| Height (min.) | 34" |
| (max.)* | 35" |
| Width | 24" |
| Depth (min.) | 24" |

EDW7505HPS

| | |
|---------------|----------|
| Series | designer |
| Nominal Width | 24" |
| Type | Built In |
| ENERGY STAR® | Yes |

| | |
|-----------------------|-------------------|
| Height (adjustable) | 33-7/8" – 34-7/8" |
| Width | 23-3/4" |
| Depth (to door front) | 24-5/8" |
| (with 90° door open) | 49-7/8" |

EDW7505HSS

| | |
|---------------|-----|
| Height (min.) | 34" |
| (max.)* | 35" |
| Width | 24" |
| Depth (min.) | 24" |



Dishwashers are designed to also accept a custom door panel and handle (not included).

*Maximum height for standard cabinetry cutout is 35".

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.

Built-In Coffee Maker

Signature Feature

Built-In Coffee Maker

Electrolux ICON® Blue Illumination

Signature blue display lighting illuminates the function buttons and brewing compartment with the touch of a switch.



Built-In Coffee Maker
designer series
E24CM75GSS

Built-In Coffee Maker

| | |
|---------------|----------|
| Series | designer |
| Nominal Width | 24" |
| Type | Built In |

Overall Dimensions

| | |
|---|-----------|
| Height | 18-3/16" |
| Width | 23-1/2" |
| Depth (to front panel) | 18-3/16" |
| (with front panel in 90° open position) | 41-11/16" |

Cutout Dimensions

| | |
|--------------|---------|
| Height | 17-7/8" |
| Width (min.) | 22-1/8" |
| (max.) | 22-3/8" |
| Depth (min.) | 24" |

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.

Under-Counter Products



Under-Counter Wine Cooler
professional series
E24WC75HPS



Under-Counter Wine Cooler
designer series
E24WC75HSS



Under-Counter Ice Maker
professional series
E15IM60GPS



Under-Counter Ice Maker
designer series
E15IM60GSS



Under-Counter Refrigerator Drawers
professional series
E24RD75HPS



Under-Counter Refrigerator Drawers
designer series
E24RD75HSS



Under-Counter Trash Compactor
professional series
E15TC75HPS



Under-Counter Trash Compactor
designer series
E15TC75HSS

Signature Features

Under-Counter Products

Integrated Electronic Controls

(Wine Coolers)

Reversible side-swing door with integrated electronic controls located conveniently on the top of the door ensure this unit will fit anywhere.

Crystal Clear Ice

(Ice Makers)

Continuous flowing water where ice is formed, allows impurities to be separated from the water leaving ice free of odors, minerals and contaminants. Thirty-two, 7/8" cubes of crystal clear ice are produced per freeze cycle, up to sixty pounds per day.

Smooth-Glide™ Drawers

(Refrigerator Drawers)

Fully extending drawers glide out easily and smoothly, providing simple and convenient access to every item.

Deodorizing System

(Trash Compactors)

Keeps your kitchen smelling fresh and clean with a disk that protects up to six months and alerts you via the control panel when it's time to replace.

Under-Counter Products

| | E24WC75HPS | E24WC75HSS | E15IM60GPS | E15IM60GSS | E15TC75HPS | E15TC75HSS | E24RD75HPS | E24RD75HSS |
|-------------------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|-------------------|-------------------|
| Series | professional | designer | professional | designer | professional | designer | professional | designer |
| Nominal Width | 24" | 24" | 15" | 15" | 15" | 15" | 24" | 24" |
| Type | Built In/ Freestanding | Built In/ Freestanding | Built In/ Freestanding | Built In/ Freestanding | Built In/ Freestanding | Built In/ Freestanding | Built In | Built-In |
| ENERGY STAR® | | | | | | | Yes | Yes |
| Sabbath Mode (Star-K® Certified) | | | Yes | Yes | | | | |
| A.D.A. Compliant† | Yes | Yes | | | | | Yes | Yes |
| Overall Dimensions | | | | | | | | |
| Height (adjustable) | 34-5/16" – 35" | 34-5/16" – 35" | 34-1/8" – 35" | 34-1/8" – 35" | 34-3/8" – 35-3/8" | 34-3/8" – 35-3/8" | 34" – 35" | 34" – 35" |
| Width | 23-13/16" | 23-13/16" | 14-15/16" | 14-15/16" | 14-7/8" | 14-7/8" | 23-13/16" | 23-13/16" |
| Depth (to door/drawer front) | 23-7/8" | 23-7/8" | 24" | 24" | 21-1/2" | 21-1/2" | 23-15/16" | 23-15/16" |
| (to handle) | 26-1/2" | 25-7/8" | 26-1/2" | 25-7/8" | 23-5/8" | 23" | 26-9/16" | 25-15/16" |
| (with 90° door open) | 47" | 47" | 38-7/8" | 38-7/8" | 35-7/8" | 35-7/8" | | |
| (to handle w/drawer fully extended) | | | | | | | 42-3/8" | 41-3/4" |
| Cutout Dimensions | | | | | | | | |
| Height (min.) | 34-3/8" | 34-3/8" | 34-1/4" | 34-1/4" | 34-5/8" | 34-5/8" | 34-3/8" | 34-3/8" |
| Width | 24-1/8" | 24-1/8" | 15-1/8" | 15-1/8" | 15" | 15" | 24-1/8" | 24-1/8" |
| Depth (min.) | 24" | 24" | 24" | 24" | 24" | 24" | 24" | 24" |

†When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions. Specifications subject to change.

For more information on
Electrolux ICON® premium appliances,
visit us at electroluxicon.com

Electrolux Major Appliances, N.A.

USA • 250 Bobby Jones Expressway • Augusta, GA 30907 • 1-877-4electrolux (1-877-435-3287) • electroluxicon.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxicon.ca

High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.