Georgia-Pacific Professional

Installation of enMotion Recessed Automated Touchless Towel Dispenser and Trash Receptacle into Wall

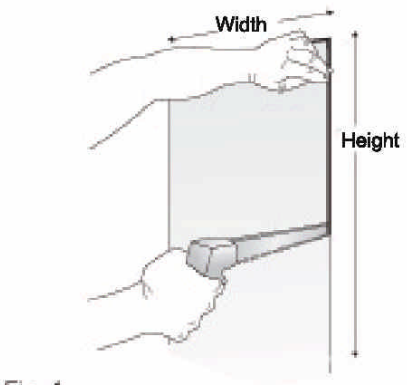


Fig. 1

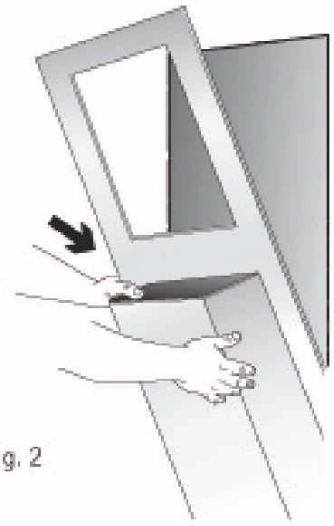


Fig. 2

Locate stud in wall and cut hole to accommodate enMotion Recessed Automated Touchless Towel Dispenser and Trash Receptacle.

For the SKU#59491 Trash Receptacle (16" on center studs), cut hole that is 15.75" wide by 54" long at recommended height of 3" from floor (See Fig. 1).

For the SKU#59471 Trash Receptacle (12" on center studs), cut hole that is 11" wide by 57.5" long at recommended height of 4" from floor (See Fig. 1).

Install and fit enMotion Recessed Trash Receptacle into wall cavity. Secure into studs using 2" #10 pan head self-tapping screws through holes provided (See Fig. 2).

Ensure the enMotion Recessed Trash Receptacle is attached to stud or frame cavity as necessary.

Locate the mounting slots inside the enMotion Recessed Automated Touchless Towel Dispenser.

Secure the enMotion Recessed Automated Touchless Towel Dispenser into the Trash Receptacle using 2" #10 pan head self-tapping screws. (See Fig. 3).

Install battery pack and test.

Load the Georgia Pacific roll towel and close door (See Fig. 4).

Clean off the enMotion Recessed Automated Touchless Towel Dispenser using isopropyl rubbing alcohol (See Fig. 5).

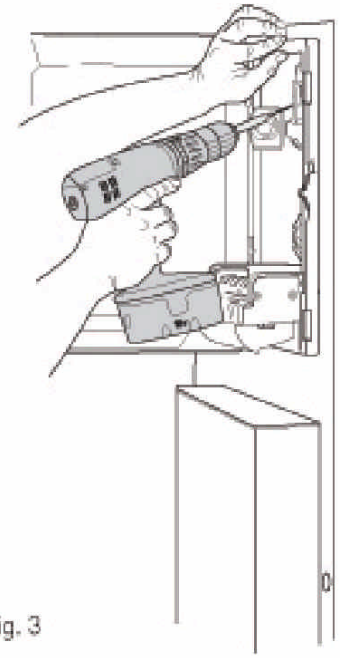


Fig. 3

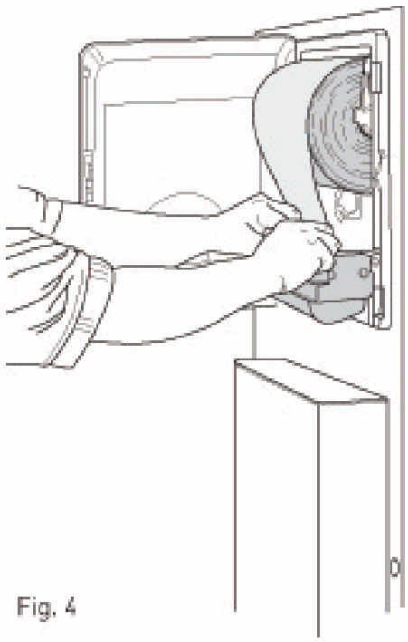


Fig. 4



Fig. 5