



# Water Coolers

## **BARRIER-FREE SPLIT-LEVEL VERSACOOLER® II WITH VERSAFILTER SYSTEM**

### **PRF8ACSL, PRFACSL**

#### Suggested Specification

Model PRF8ACSL shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Model PRFACSL is a non-refrigerated drinking fountain and delivers ambient water. Shall have VersaFilter system for taste, odor and chlorine reduction, lead reduction and cyst reduction. VersaFilter system shall comply with NSF standards 42 and 53. Models PRF8ACSL and PRFACSL shall include front and side push pads to activate the flow of water. Basin shall be designed to eliminate splashing and standing water. Bubbler shall have flexible guard and operate between 20 and 120 psi. Cabinet finish shall be Sandstone or Greystone powder coated paint on galvanized steel or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall comply with ANSI A117.1 and ADA. Shall comply with ANSI A117.1 and ADA. Shall be listed by Underwriters' Laboratories to U.S. and Canadian standards. Shall comply with ANSI/NFS 61.

#### Models

PRF8ACSL Delivers 8.0 gallons of chilled drinking water per hour. PRFACSL A non-refrigerated drinking fountain. These models satisfies CABO/ANSI A117.1. When accessory apron is used on the upper unit, this cooler will comply with ADA guidelines, when properly installed. Apron is not required when installed in an alcove or if a wing wall is installed on the left side. Models also meet guidelines for children's accessibility providing the floor to orifice height is 30 inches and proper clear floor space is provided for parallel approach.

#### Standard Features

- > VersaFilter system for taste, odor and chlorine reduction, lead reduction, and cyst reduction
- > Waterways Are Lead-Free In Materials & Construction
- > ANSI/NSF 61
- > Stainless Steel Top
- > Flexible Bubbler Guard
- > Heavy Duty Galvanized Steel Frame
- > High Efficiency Cooling Tank and Coil
- > Refrigerant R-134a
- > Four Push Pad Activation
- > External Stream Height Adjustment

#### Finishes

- > Standard Cabinet Finish: Sandstone powder coated paint on galvanized steel
- > Optional finishes at no additional cost: Greystone powder coated paint on galvanized steel
- > Optional finishes at additional cost: Stainless Steel, Regency Bronze, and optional powder coated finishes



#### Options (at additional cost)

- > Glass Fillers (Factory Installed)
- > Push Handle (029603-004)
- > Push Back (029603-005)
- > Push Down (029603-006)
- > Stainless steel bubbler
- > Apron for upper unit

#### Installation

- > Prior to roughing consult with local, state, and federal codes for proper mounting height.
- > Shipped with complete instructions and wall mounting bracket.
- > Removable side and front panels provide easy access for installation



ADA Compliant when installed in an alcove or with left wing wall.

When properly installed, meets all TAS standards for children's frontal approach.



Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

**Powder Coated Finish Warranty** (Continental limits of the United States and Canada): Three years on the powder coat finish provided that the water cooler has not been subjected to abuse, misuse, or alteration.

**Limited 5-Year Warranty** (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

**Export Warranty:** One year on component parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Models covered by this specification complies with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.




Certified to NSF/ANSI 61/ Section 9

Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PRF8ACSL	8.0	8.0	No	No	1/4	4.6	460	Yes	Yes	84 Lbs.
PRFACSL	Fountain Only							Yes	Yes	50 Lbs.

\* Industry Standard Rating Condition 80° F inlet water temperature. Specifications subject to change without notice

**OASIS® BARRIER-FREE SPLIT-LEVEL Versacooler® II MODELS  
PR8ACSL, PRACSL, PRAFACSL, PRF8ACSL, PRFACSL, PRF8ACSLFE, PRV8ACSL**

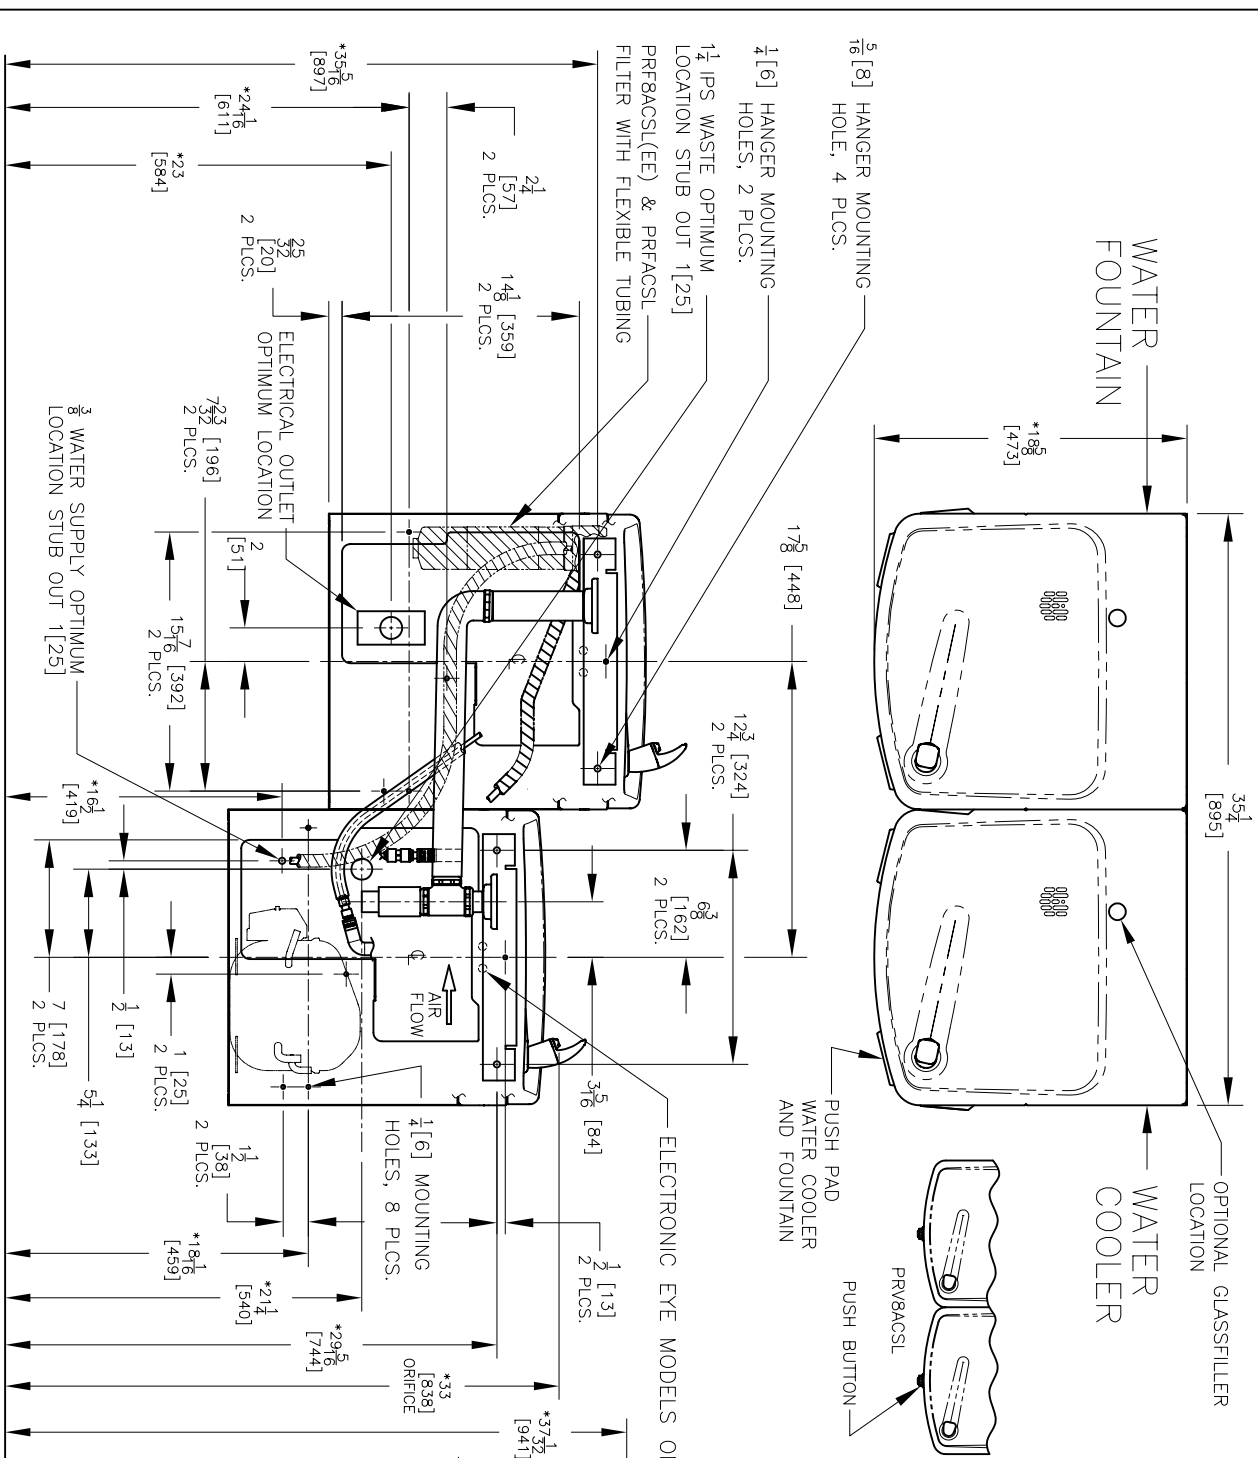

- NOTES:
- 1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
  - 2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
  - 3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
  - 4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.