

Strategic partnership. Professional quality. Unsurpassed security.

Our long-standing partnership with the United States Postal Service (USPS), enables us to be the only manufacturer able to provide you with the highest quality products designed to meet the most stringent USPS standards. In 2005 for example, the United States Postal Service selected Florence Manufacturing as its single source supplier of cluster box units. We are proud to offer you the same quality and security the USPS depends on day in and day out.



USPS Partnership

Florence Manufacturing continues to dedicate itself to providing secure postal specialty products built to USPS standards. We are

the *only* manufacturer authorized to provide F series cluster box units, outdoor parcel lockers and replacement pedestals and parts to the USPS since they awarded Florence their single-source contract for outdoor delivery equipment



in 2005. We are also extremely proud to have been awarded the USPS Quality Supplier Award in 2003 and 2005 as well as the prestigious USPS Supplier Excellence Award in 2006. Having received a significantly above average score on its 2008 USPS audit places Florence as 'one of the best in class'.

Quality Manufacturer Since 1934

With a centrally located facility in Manhattan, KS, Florence Manufacturing is proud to be



the nations longest supplier of mailboxes and mailbox accessories having been in production for the past 75 years. Providing the most comprehensive product lines within the industry, we are a certified ISO 9001:2000 and Underwriters Laboratory audited manufacturer. Florence Manufacturing is a vertically integrated plant featuring onsite fabrication, state-of-the-art powder coating and robotic welding.

This cutting edge facility boasts a strong recycling

program with its powder reclamation program as well as extensive corrugate, steel and aluminum recycling programs.



Find an Authorized Florence Dealer

Florence Manufacturing proud to have built relationships with the most extensive national dealer network in the industry. Authorized Florence Dealers are located from coast to coast and are ready to assist you from specification to final installation. By utilizing local expertise rather than buying direct from the factory, you are guaranteed




personalized local service to meet your needs for each and every project. To find an Authorized Florence Dealer nearest you, visit us at florencemailboxes.com or call 800-275-1747.

Do It Yourself Online Tools

Want to determine what your project needs are on your own? You can visit us at florencemailboxes.com 24/7 to configure a mail system that satisfies your specific project needs, browse product information, download technical documents and much more!


Configurator

Florence Manufacturing's one-ofa-kind mailbox product/system configurator will help guide you step by step in creating a mail system to fit your individual needs. This unique system will also provide you with CAD drawings of your selection as well as access to quote your creation by an Authorized Florence Dealer. Simply visit florencemailboxes. com night or day to access this useful tool!



Downloads

Looking for product specific drawings, technical information, color images, brochures or postal regulations? It's all located at florencemailboxes.com. Simply click the downloads navigation tab for instant access to a multitude of technical, dimensional, and promotional material.

























A GIBRALTAR INDUSTRIES COMPANY



NEW From Florence Manufacturing

Florence Manufacturing is proud to focus on Division 10 Postal Specialties; bringing you a quality product which continues to meet your ever changing needs. Look for these fine products throughout the catalog or discuss them with an Authorized Florence Dealer near you.



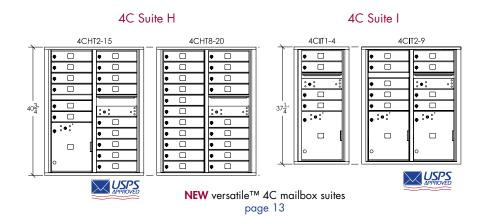



NEW versatileTM 4C collars page 11



NEW versatileTM 4C rear-load page 11



NEW versatile[™] 4C Configurable page 11



NEW sentinelTM solar site lite page 21



NEW varioTM pre-engineered mail shelter kits pages 16 - 20



NEW vario EXPRESSTM pre-engineered mail station kits pages 16 - 20



NEW Florence Site Furnishings by Victor Stanley, Inc. page 21



Durable, Multi-Compartment Mailboxes for Residential and Commercial Applications

6

6

6

6

6

6

2

3

4

5

6

The Florence vital[™] 1570 series cluster box unit design has been adopted by the USPS as the design standard for all CBUs manufactured in the United States. As the original manufacturer of the F Series, Florence is pleased to offer a complete line of USPS approved cluster box units. To fit your individual project needs, we offer USPS approved architectural powder coat color options in both flat and pebble finishes. We are honored to have been selected as the sole supplier of CBUs to the USPS and proud to offer you the same security and reliability that the USPS depends on each and every day.

7

9

10

11



Florence "F"
CBU Is Officially
Licensed by USPS

The Florence vitalTM 1570 series CBU is now an Officially Licensed Product of the US Postal Service for centralized mail delivery.



- Robotically welded cabinet and hood seams
- Rugged, weather resistant powder coat pebble finish resists scratching and vandalism
- Constructed of 300 series stainless steel and aircraft aluminum, including aluminum pedestal
- Master front loading door designed to prevent prying with interlocking overlap seams
- Solid aluminum mail slot frame, similar to Florence exclusive HSCBU design, protects adjacent customer compartment and collection compartment
- Silver adhesive metal placards with black numbers 1-16 and 1P-2P

Powder Coat Color Options

Standard: Sandstone PMS 7501C

Optional: White PMS White

PMS Black 7C

Forest Green
PMS 3308C

Black PMS Black 6C

Replacement:

Postal Grey
PMS 413C

1570-13SDAF shown in standard sandstone

1570-13SDAF Type IV

Installed height	62"
Depth	1 <i>7-7/</i> 8″
Width	30-1/2"
Weight (with pedestal)	167 lbs.
Pedestal height	14-3/8"
Std. compartment	5"H x 12"W x 15"D

NEW

5

6

8

20

EW Accessories



Dress up your vital™ CBU with designer caps and pedestals. These USPS approved snap-on accessories place the final touches on your community mailboxes. Ask your authorized Florence Dealer for details.

Lock Type

The vital™ CBU series comes standard with a K91910 lock in each tenant compartment door.



K91910

ID Options

- Custom placards 1-999 and 1P-99P
- Engraved numbers
- Black-filled engraved numbers





1570-8SDAF

Type I

Installed height	62"
Depth	1 <i>7-7/</i> 8″
Width	30-1/2"
Weight (with pedestal)	144 lbs.
Pedestal height	28-1/2"
Std. compartment 3-1/4"H	x 12"W x 15"D

1570-12SDAF Type II

Installed height	62"
Depth	17-7/8"
Width	30-1/2"
Weight (with pedestal)	144 lbs.
Pedestal height	28-1/2"
Std. compartment 3-1/4"H	x 12"W x 15"D

1570-16SDAF

Type III

Installed height	62"
Depth	1 <i>7-7/</i> 8″
Width	30-1/2"
Weight (with pedestal)	1 <i>75</i> lbs.
Pedestal height	14-3/8"
Std. compartment 3-1/	/4"H x 12"W x 15"D

W.S.P.S.



Designed especially for and used by the United States Postal Inspection Service

The Florence vigilant™ 1565 series high security cluster box unit was designed specifically for the U.S. Postal Inspection Service. Built to combat mail theft and reduce break-in damage in high crime areas, its robust security features make the vigilant™ high security CBU incredibly secure. Available exclusively from an Authorized Florence Dealer, this product line is an extension of our already strong vital™ CBU series with the benefit of additional tamper resistant features. Give your neighborhood that extra peace of mind by adding a Florence vigilant™ high security CBU.



Unique vigilant™ Features

- Thicker, reinforced gate
- Special security collar on all compartment locks
- Heavier gauge aluminum cabinet
- Larger diameter 1/4" hinge rod on
- Reinforced shelf above and below the carrier access door to deter break-ins
- Stainless steel parcel door hinge for added strength
- Heavy duty stainless steel pedestal
- High security mounting hardware included

Standard Features

- Robotically welded cabinet and hood seams
- Rugged, weather resistant powder coat pebble finish resists scratching and vandalism
- Constructed of 300 series stainless steel and aircraft aluminum, including stainless steel pedestal
- Master front-loading door designed to prevent prying with interlocking overlap seams
- Solid aluminum mail slot frame protects adjacent customer compartment and collection compartment
- Silver adhesive metal placards with black numbers 1-16 and 1P-2P

1565-16D Type III

Installed height	
Depth 1	7-7/8"
	0-1/2"
Weight (with pedestal)	86 lbs.
Pedestal height	4-3/8"
Std. compartment $3-1/4"H \times 12"W$	× 15″D

Powder Coat Color Options

Standard: Sandstone

Optional: White PMS White

Dark Bronze PMS Black 7C Forest Green PMS 33080

PMS Black 6C

Replacement: Postal Grey **NEW**

EW Accessory



Increase the security of your mail center at night with the addition of the **NEW Florence** sentinel™ solar site lite. This free-standing, enclosed

solar light system is designed to fit perfectly around the base of Florence CBU and High Security CBUs. (see page 21 for additional product details)

9

10

11

12

3 1P

(3

(3)

13

(3

2

3

6 10

10

10

Lock Type

The vigilant™ high security CBU series comes standard with a K92910 lock in each tenant compartment door.



ID Options

- Custom placards 1-999 and 1P-99P
- Engraved numbers
- Black-filled engraved numbers



1565-8SDAF

Installed height	62"
Depth	1 <i>7-7/</i> 8″
Width	30-1/2"
Weight (with pedestal)	152 lbs.
Pedestal height	28-1/2"
Std. compartment 3-1/4"	1 x 12"W x 15"D

5

6

8

) 2P

0

0

0

0

3

1565-12SDAF Type II

Installed height	62"
Depth	1 <i>7-7/</i> 8″
Width	30-1/2"
Weight (with pedestal)	156 lbs.
Pedestal height	28-1/2"
Std. compartment 3-1/4	4"H x 12"W x 15"D

USPS APPROVED

1565-13SDAF

Type IV

Installed height	62"
Depth	1 <i>7-7/</i> 8″
Width	30-1/2"
Weight (with pedestal)	1 <i>77</i> lbs.
Pedestal height	14-3/8"
Std. compartment	5"H x 12"W x 15"D

USPS APPROVED



Flexibility Without the Fuss

Versatile™ 4C mailbox suites meet or exceed all security requirements of the USPS STD-4C regulation for wall-mounted mail receptacles. Florence 4C mailboxes are constructed of heavy gauge aluminum and 300 series stainless steel components for superior strength, corrosion resistance and exceptional outdoor durability.

Our unique, patented double-locking parcel door mechanism makes sure your mail and packages stay safe and secure while our rugged, corrosion resistant powder coat finish resists scratching and vandalism to make sure your Florence versatile™ 4C mailbox system looks as appealing in the years ahead as it does the day you install it.



Standard Features

- Rugged, corrosion and weather resistant powder coat finish resists scratching and vandalism
- Constructed of heavy gauge aluminum and 300 series stainless steel components for superior strength, corrosion resistance and exceptional outdoor durability
- Master loading door designed with interlocking overlap seams to prevent prying
- Quick release master loading door lock latch for easy access by Postal
- Solid aluminum mail slot frame, similar to high security CBU design, protects adjacent customer compartment and collection compartment
- Unique double-latching parcel locking mechanism design (patent pending)
- Front and rear (NEW) loading units available
- Prepared for number placards 1-20, 1P-3P
- Exclusive Florence multi-unit connector kit hardware (patent pending) available with every mailbox module for convenience and ease of installation

Powder Coat Color Options Sandstone PMS 7501C

White

Dark Bronze PMS Black 7C Forest Green PMS 3308C

> Black PMS Black 6C

Silver Speck

Blonde Gold* PMS 7536C **Postal Grey**

PMS 413C *Blonde Gold rated for indoor use only

4C Options







Florence Manufacturing is pleased to introduce two brand new USPS approved options for our extensive versatile™ 4C product line. When installed in a wall that opens into a secure room, our NEW exclusive rear-load design allows for faster mail delivery. The NEW collar line allows you to surface mount any of your 4C front-load mailbox suites while still giving your mail system a sleek, finished look. Contact an Authorized Florence Dealer or visit florencemailboxes.com for additional details on either of these new products.

Lock Type

The versatile™ 4C series comes standard with a K91910 lock in each tenant compartment door.




ID Options

- Custom placards 1-999 and 1P-99P
- Engraved numbers
- Black-filled engraved numbers

Did you know?

Florence Manufacturing has most extensive line of USPS STD-4C approved mailbox suites in the industry. An Authorized Florence Dealer can help you find just the right size product for your individual project needs.

4C Configurable Option





Florence versatile™ 4C mailbox suites are known for providing a simple, easy to use 'pre-configured' suite of mailboxes. Each of the nine versatile™ 4C suites have multiple mailbox modules within it to mix 'n match - ensuring plenty of options to meet each job specification. However, Florence knows that there are times when a project may require a little something extra. Therefore, Florence is proud to expand its robust USPS Approved product line once again by introducing a NEW configurable option within each of the 38 versatile™ modules. It is now possible to replace single tenant mailbox compartment doors with double, triple or even quadruple size tenant mailbox compartment doors. This flexibility will allow customization within each mailbox module while still being USPS approved. To see just how this expanded option can affect a specific project, visit the industry unique online mailbox configurator at florencemailboxes.com to begin designing a fully configurable versatile™ 4C mailbox layout.



NEW




No calculating or

your needs.

You're done!

powder coat options.

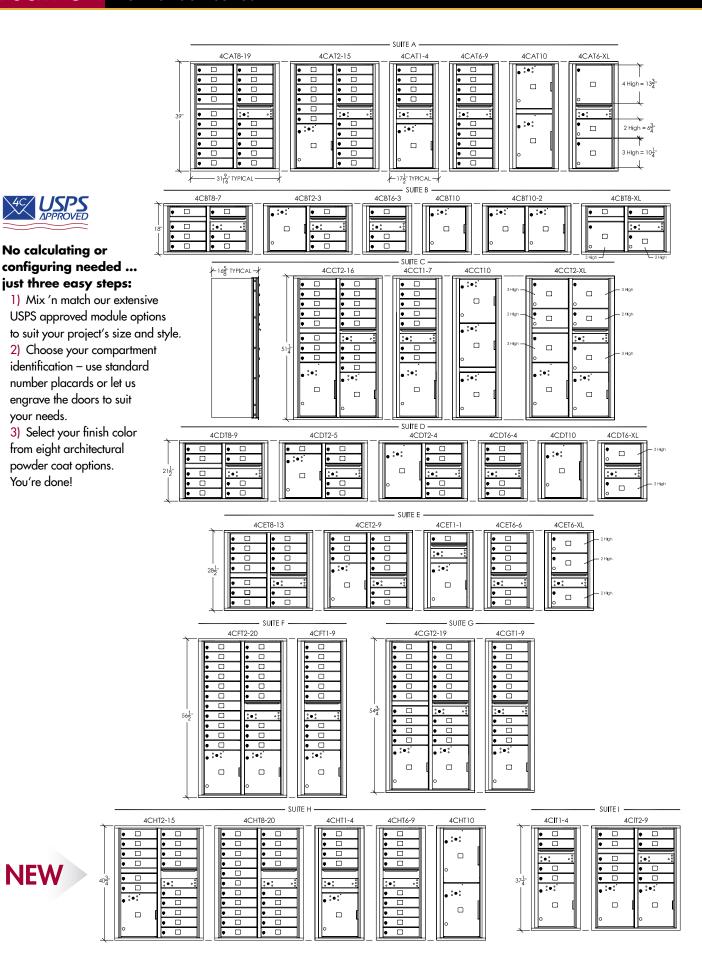

NEW

40<u>3</u>-

4C Dimension and Weight Chart

	ROUGH OPENING HEIGH	T: 38-1/16"; ROUGH OPEN	ING DEPTH: 17" Minimum	* Weights shown for bo	oth Front-load / Rear-load	doption		
	MODEL	RO WIDTH	ACTUAL WIDTH	WEIGHT (LBS)*	# TENANTS	# PARCELS		
SUITE A 39" UNIT HEIGHT	4CAT8-19 4CAT2-15 4CAT1-4 4CAT6-9 4CAT10	30-5/16" 30-5/16" 16-1/4" 16-1/4" 16-1/4"	31-9/16" 31-9/16" 17-1/2" 17-1/2"	120 / 143 115 / 138 63 / 74 67 / 78 55 / 72	19 15 4 9	0 1 1 0 2		
	4CAT6-XL	16-1/4"	17-1/2"	63 / 76	3	0		
	ROUGH OPENING HEIGH	T: 17-1/16"; ROUGH OPEN	ING DEPTH: 17" Minimum					
a	MODEL	RO WIDTH	ACTUAL WIDTH	WEIGHT (LBS)*	# TENANTS	# PARCELS		
SUITE B 18" UNIT HEIGHT	4CBT8-7 4CBT2-3 4CBT6-3 4CBT10 4CBT10-2 4CBT8-XL	30-5/16" 30-5/16" 16-1/4" 16-1/4" 30-5/16" 30-5/16"	31-9/16" 31-9/16" 17-1/2" 17-1/2" 31-9/16" 31-9/16"	55 / 63 55 / 65 30 / 33 25 / 32 50 / 65 55 / 64	7 3 3 0 0 4	0 1 0 1 2 0		
	ROUGH OPENING HEIGH	T: 50-5/16"; ROUGH OPEN	ING DEPTH: 17" Minimum					
SUITE C	MODEL	RO WIDTH	ACTUAL WIDTH	WEIGHT (LBS)*	# TENANTS	# PARCELS		
51-1/4" UNIT HEIGHT	4CCT2-16 4CCT1-7 4CCT10 4CCT2-XL	30-5/16" 16-1/4" 16-1/4" 30-5/16"	31-9/16" 17-1/2" 17-1/2" 31-9/16"	145 / 175 76 / 91 67 / 86 145 / 182	16 7 0 6	2 1 3 2		
	ROUGH OPENING HEIGH	T: 20-9/16"; ROUGH OPEN	ING DEPTH: 17" Minimum					
SUITE D	MODEL	RO WIDTH	ACTUAL WIDTH	WEIGHT (LBS)*	# TENANTS	# PARCELS		
21-1/2" UNIT HEIGHT	4CDT8-9 4CDT2-5 4CDT2-4 4CDT6-4 4CDT10 4CDT6-XL	30-5/16" 30-5/16" 30-5/16" 16-1/4" 16-1/4" 16-1/4"	31-9/16" 31-9/16" 31-9/16" 17-1/2" 17-1/2"	68 / 78 60 / 73 61 / 73 40 / 45 40 / 52 40 / 45	9 5 4 4 0 2	0 1 0 1 0		
	ROUGH OPENING HEIGHT: 27-9/16"; ROUGH OPENING DEPTH: 17" Minimum							
SUITE E	MODEL	RO WIDTH	ACTUAL WIDTH	WEIGHT (LBS)*	# TENANTS	# PARCELS		
28-1/2" UNIT HEIGHT	4CET8-13 4CET2-9 4CET1-1 4CET6-6 4CET6-XL	30-5/16" 30-5/16" 16-1/4" 16-1/4" 16-1/4"	31-9/16" 31-9/16" 17-1/2" 17-1/2" 17-1/2"	86 / 101 86 / 103 58 / 67 58 / 67 58 / 67	13 9 1 6 3	0 1 1 0 0		
CLUTE E	ROUGH OPENING HEIGH	T: 55-9/16"; ROUGH OPEN	ING DEPTH: 17" Minimum					
SUITE F 56-1/2" UNIT	MODEL	RO WIDTH	ACTUAL WIDTH	WEIGHT (LBS)*	# TENANTS	# PARCELS		
HEIGHT	4CFT1-9 4CFT2-20	16-1/4" 30-5/16"	1 <i>7</i> -1/2" 31-9/16"	97 / 119 171 / 206	9 20	1 2		
	ROUGH OPENING HEIGH	, , , , , , , , , , , , , , , , , , ,	NING DEPTH: 17" Minimum					
SUITE G 54-3/4" UNIT	MODEL	RO WIDTH	ACTUAL WIDTH	WEIGHT (LBS)*	# TENANTS	# PARCELS		
HEIGHT	4CGT1-9 4CGT2-19	16-1/4" 30-5/16"	17-1/2" 31-9/16"	97 / 117 171 / 206	9 19	1 2		
	ROUGH OPENING HEIGH	T: 39-13/16"; ROUGH OPE	NING DEPTH: 17" Minimum (N	IEW)				
SUITE H	MODEL	RO WIDTH	ACTUAL WIDTH	WEIGHT (LBS)*	# TENANTS	# PARCELS		
40-3/4" UNIT HEIGHT	4CHT2-15 4CHT8-20 4CHT1-4 4CHT6-9 4CHT10	30-5/16" 30-5/16" 16-1/4" 16-1/4" 16-1/4"	31-9/16" 31-9/16" 17-1/2" 17-1/2" 17-1/2"	122 / 145 123 / 145 66 / 77 68 / 79 52 / 69	15 20 4 9 0	1 0 1 0 2		
011111	ROUGH OPENING HEIGH	T: 36-5/16"; ROUGH OPEN	ING DEPTH: 17" Minimum (N	EW)				
SUITE I 37-1/4" UNIT	MODEL	RO WIDTH	ACTUAL WIDTH	WEIGHT (LBS)*	# TENANTS	# PARCELS		
HEIGHT	4CIT1-4 4CIT2-9	16-1/4" 30-5/16"	17-1/2" 31-9/16"	55 / 69 96 / 127	4 9	1 2		

RO height and width on all models tolerant to +1/4"-0". RO height and width on all multi-unit installations tolerant to +1/8" -0".

Use this formula to calculate RO width for Multi-Unit 4C Installation = (the sum of all actual unit widths) - 1-1/8"





13



versatile™ 4C Accessibility Details

Accessibility and Regulatory Standards Compliance					
Florence versatile™	Accession	inty and negulator	/ Standards Comp	illarice	
4C mailbox suites (Unit Heights)	US Postal Service ¹ U.S. DOJ ² STD-4C Installation ADA Standards		ICC/ANSI ³ A117.1 2003	IBC 2006 (Ref: ICC/ANSI) ³	
Suite A - 39"	YES	NO	NO	NO	
Suite B - 18"	YES	YES	YES	YES	
Suite C - 51-1/4"	YES	NO	NO	NO	
Suite D - 21-1/2"	YES	YES	YES	YES	
Suite E - 28-1/2"	YES	YES	NO	NO	
Suite F - 56-1/2"	YES	NO	NO	NO	
Suite G - 54-3/4"	YES	NO	NO	NO	
Suite H - 40-3/4"	YES	NO	NO	NO	
Suite I - 37-1/4"	YES	YES	YES	YES	

¹Standards Governing the Design of Wall-Mounted Centralized Mail Receptacles. Federal Register/ Vol. 69, No 171/September 3, 2004/Rules and Regulations POSTAL SERVICE, 39 CFR Part 111.

²ADA Standards for Accessible Design, Department of Justice Code of Federal Regulations, 28 CFR Part 36, Appendix A, Section 4.2 Space Allowance and Reach Ranges. Americans with Disabilities Act Accessibility Guidelines (ADAAG).

³Accessible and Usable Buildings and Facilities, International Code Council/American National Standard Institute (ICC/ANSI A117.1-2003), Chapter 3 Building Blocks, Section 308 Reach Ranges. NOTE: The 2006 International Building Code (IBC 2006) also refers to this ANSI Standard for accessibility building guidelines as does the Federal Fair Housing Act Accessibility Guidelines.

Notes:

All STD-4C compliant mailboxes must meet the U.S. Postal Service's design and installation regulation in order to receive the "USPS Approved" designation. Accessibility regulations may vary locally and regionally. Therefore, always consult local building code authorities for applicable accessibility codes related to your mailbox project.

A "Yes" rating in the chart above was assigned only if ALL mailboxes in the entire Florence versatile™ suite met the referenced regulation. A 4C suite that has been assigned a "No" rating will have some rows of mailboxes that DO meet the accessibility regulation, but others which do not. This "Accessibility Guide" is designed to help you determine which Florence 4C mailbox suite meets your individual project specifications. Consult local codes for accessibility requirements.


Sequential numbering (rather than assigning mailbox IDs that match apartment or house numbers) of mailbox compartments may allow greater flexibility in providing mailbox compartments that meet accessibility regulations applicable to your project. Sequential numbering of mailbox compartments also provides greater security and privacy for your residents.

Mailbox modules from Suites B, D, and I can be used with projects where ALL resident mailboxes must comly with the Fair Housing Act/ANSI 48" height restrictions as well as comply with the USPS STD-4C installation specification.

Meeting Proper Installation Instructions

Installation requirements specified in the U.S. Postal Service STD-4C regulation are outlined below. Florence Manufacturing STD-4C product installation instructions adhere to all USPS regulations. For reference, versatileTM 4C suite A is shown below. Other suite installation details are available by contacting your local Authorized Florence Dealer or by going online to florencemailboxes.com.

- At least one customer compartment shall be positioned less than 48 inches from the finished floor.
- No parcel locker compartment (interior bottom shelf) shall be positioned less than 15 inches from the finished floor.
- 3. No patron (tenant) lock shall be located more than 67 inches above the finished floor.
- 4. No customer compartment (interior bottom shelf) shall be positioned less than 28 inches from the finished floor.
- The USPS Arrow lock shall be located between 36 and 48 inches above the finished floor.

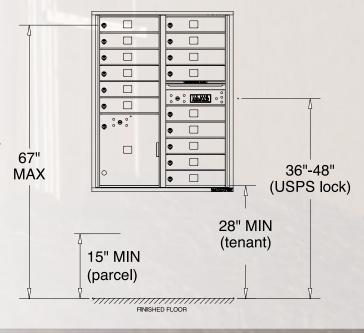

New Construction Solutions

It can often be tricky determining the exact amount of space neeed for a mail delivery center in any new construction situation - especially if mailboxes were not considered early in the planning process. That is why Florence is the only mailbox manufacturer who stands ready to assist each project manager with local authorized dealers in addition to its 24/7 unique online mailbox configurator. These resources can help you quickly determine the space required as well as the type of USPS Approved product needed.

To ensure each new construction project adheres to the new mandatory USPS STD-4C regulation, be sure to consult with an Authorized Florence Dealer who can assist you from specification to installation.

MUCK - Multi-Unit Connector Kit



Manufacturing Florence has multi-unit specialized connector kit (patent pending) with each 4C versatile™ mailbox module for easy installation of multiple 4C mailbox layouts in a single rough opening. Use of this hardware is optional depending upon project layout and installer preference. This unique kit helps to complete a beautiful, flush installation by eliminating the need for studs and reduces the separation between mailbox units.

Current Postal Regulations for New Construction



The STD-4C, which now applies to all Wall-Mounted Centralized Mail Receptacles, replaces the previous STD-4B+ regulation for Receptacles/Apartment/House Mail, and became mandatory in October 2006 for all new construction and major renovation projects.

Existing 4B+ horizontal units may be used for replacement if no modification of the mail center wall opening is being made. While this strict product replacement is acceptable under the new STD-4C; any changes to the configuration/adjustments to the wall for remodeling or any new construction require the use of new 4C USPS Approved product. (Be sure to check with local postal authorities prior to modifying or building any mail delivery center.)

The USPS STD-4C specification creates a new form factor for the mailbox and increases the minimum size requirement (12" W x 15" D x 3" H); completely eliminating the vertical form factor (5" W x 6" D x 15" H). STD-4C also requires one parcel locker per ten tenant compartments. Security features and lock design requirements are now more stringent, which include mandatory security testing done by the USPS. More product details as well as the full STD-4C regulation is available by contacting an Authorized Florence Dealer or by visiting florencemailboxes.com.

To ensure USPS approval, make certain all new 4C approved products are installed properly. See page 14 for additional product installation instruction details.



Excellent Design Fits In!


Vario[™], the first turnkey, fully customizable 4C configurable mail shelter kit, originated from the desire for more architecturally pleasing design options for the USPS preferred method of centralized mail delivery. By adding your own roofing and siding materials, the vario™ allows design and building professionals the flexibility and opportunity to personalize the final product for full integration within the neighborhood and surrounding architecture. Don't need a full shelter option? Then check out our NEW vario EXPRESSTM product line. Florence Manufacturing also makes it possible to create a true community gathering area, by providing an in-stock site furnishing product line to compliment your new 4C mail center (see pg. 21 for product details).



Standard Features

- Shelter designed to meet the 2006 International Builders Code (IBC) for 90 mph or optional 150 mph wind resistance (based on model selected)
- Shelter designed exclusively to accommodate USPS Approved Florence versatileTM 4C mailbox suite modules, but may also be used alone
- Shelters can be configured end-toend, back-to-back, or back-to-back/ end-to-end to create a larger bank of centralized mail stations
- Kit DOES NOT include finished roofing material or finishings for exterior end panels

The First Turnkey, Fully Customizable Mail Shelter Kit!

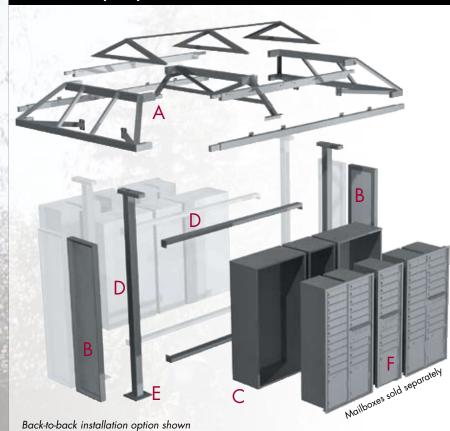

Standard Kit Includes:

installed behind standard layout

- A. Welded aluminum roof sections (figure A) - Note: plywood and roofing finish not included in kit
- B. End panels (figure B) include pressure preserved plywood sheathing with coated interior - Note: exterior finishing not included in kit
- C. Architectural powder coat finished mailbox casings (figure C)
- D. Welded aluminum horizontal/vertical supports (figure D)
- E. All necessary hardware and stainless steel fasteners, including Hilti anchors (figure E) - Note: concrete pad not included in kit - foundation plan available with quote or online at florencemailboxes.com
- F. versatileTM 4C mailbox suites sold separately (figure F)



Also available in vario EXPRESS™ mail station kit options for easy integration into your common areas



Purchased without mailbox casings, your vario™ can serve as a shelter for CBU installations or other outdoor site solutions

800-275-1747



vario™ I



Standard with Gable Peak Roof



VAR1B Back-to-Back Side View with Gable Peak Roof



vario™ I - IV Standard Mailboxes on One Side

vario™ II



Standard with Gable Peak Roof



Back-to-Back Side View with Gable Peak Roof



vario™ I - IV Back-to-Back Mailboxes on Both Sides

vario™ mail shelters are offered in a multitude of pre-engineered configurations to meet any residential or commercial development need. Below are definitions of the various shelter configurations available:

- Standard
 - Mailboxes mounted on one side
- Back-To-Back (B)
 - Mailboxes mounted on two sides
- End-To-End (E)
 - (2) standard shelters joined together
- Back-To-Back/End-To-End (BE)
- (2) Back-To-Back shelters joined together
- Optional Mid-Section (O) Extends an E or BE installation by adding additional middle connectors

For more detailed dimensional information on ALL varioTM mail shelter kits, pad specification information, or additional product information, visit our website at florencemailboxes.com


vario™ III




VAR3 Standard with Gable Peak Roof



VAR3B Back-to-Back Side View with Gable Peak Roof



VAR3E (End-to-End) or VAR3BE (Back-to-Back/End-to-End) with Gable Peak Roof



VAR3E(O) End-to-End or VAR3BE(O) Back-to-Back/ End-to-End Mid-Section


vario™ IV




VAR4 Standard with Gable Peak Roof



VAR4B Back-to-Back Side View with Gable Peak Roof



VAR4E (End-to-End) or VAR4BE (Back-to-Back/End-to-End) with Gable Peak Roof



VAR4E(O) End-to-End or VAR4BE(O) Back-to-Back/ End-to-End Mid-Section

Optional LED Lights



Enhance your vario™ mail shelter with a lighting option that suits your installation. Sold separately, the LED lighting is designed for integration into the shelter roof design and is activated by heat-detecting motion sensors. Light strips may be either hard wired with the included A/C compatible kit or designed to stand alone with the solar kit option.

Wind Resistance Rating


90 mph = Standard / 150 mph = Hurricane


The vario™ mail shelter kits are designed and built to meet 2006 International Building Code (IBC) Standards, for either 90 mph or 150 mph winds depending on shelter package selected. As some geographic areas have local building codes requiring higher levels of wind resistance, check with local building officials before finalizing $vario^{TM}$ selection.


vario EXPRESS™ mail stations are also offered in several pre-engineered configurations to meet any residential or commercial development need. Below are definitions of the various mail station configurations:


- Standard Mailboxes mounted on one side
- End-To-End (E) (2) standard shelters joined together
- Optional Mid-Section (O) Extends an E installation by adding additional middle connectors



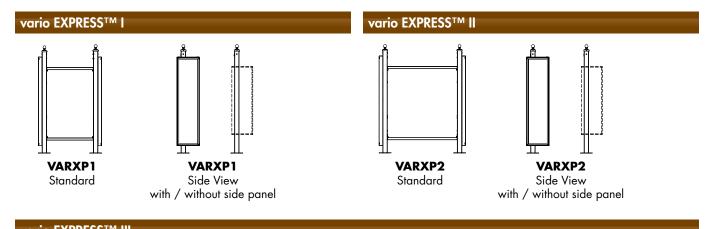

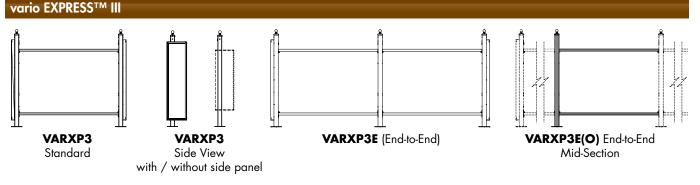

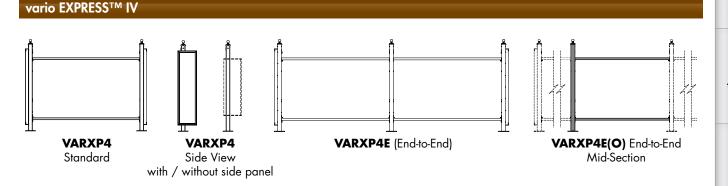

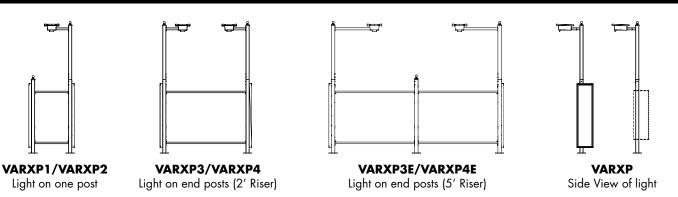





Optional sentinel™ solar site lite


Maximum Mailbox / Parcel Locker Combinations

(per section of Florence vario[™] mail shelter kits / vario EXPRESS[™] mail stations)

Calculations are based on U.S. Postal Service STD-4C requirements of one (1) parcel locker per ten (10) mailboxes. This ratio may not apply if alternate package delivery arrangements exist at facility. Discuss with local USPS official for questions related to new mailbox delivery system.

Vario Mail shelters Vario Mail stations						
Express	4C Suite A	4C Suite C	4C Suite E	4C Suite F	4C Suite G	4C Suite H
vario™ I /vario EXPRESS™ I	mailboxes / parcels					
VAR1 / VARXP1	15 / 1	16 / 2	9/1	20 / 2	19 / 2	9/2
VAR1B (back-to-back)	28 / 2	32 / 4	18 / 2	40 / 4	38 / 4	18 / 4
vario™ II /vario EXPRESS™ II	mailboxes / parcels					
VAR2 / VARXP2	19 / 2	23 / 3	14/1	29 / 3	28 / 3	13 / 3
VAR2B (back-to-back)	38 / 4	46 / 6	28 / 2	58 / 6	56 / 6	26 / 6
vario™ III /vario EXPRESS™ III	mailboxes / parcels					
VAR3 / VARXP3	34 / 3	39 / 5	23 / 2	49 / 5	47 / 5	22 / 5
VAR3B (back-to-back)	68 / 6	<i>7</i> 8 / 10	46 / 4	98 / 10	94 / 10	44 / 10
VAR3E / VARXP3E (end-to-end)	68 / 6	78 / 10	46 / 4	98 / 10	94 / 10	44 / 10
VAR3BE (back-to-back / end-to-end)	132 / 13	156 / 20	84 / 8	196 / 20	188 / 20	88 / 20
VAR3E(O) / VARXP3E(O) (mid-section for end-to-end)	34 / 3	39 / 5	23 / 2	49 / 5	47 / 5	22 / 5
VAR3BE(O) (mid-section for back-to-back / end-to-end)	68 / 6	78 / 10	46 / 4	98 / 10	94 / 10	44 / 10
vario™ IV /vario EXPRESS™ IV	mailboxes / parcels					
VAR4 / VARXP4	38 / 4	48 / 6	27 / 3	60 / 6	57 / 6	27 / 6
VAR4B (back-to-back)	76 / 8	96 / 12	54 / 6	120 / 12	114 / 12	54 / 12
VAR4E / VARXP4E (end-to-end)	76 / 8	96 / 12	54 / 6	120 / 12	114 / 12	54 / 12
VAR4BE (back-to-back / end-to-end)	152 / 16	192 / 24	108 / 12	240 / 24	228 / 24	108 / 24
VAR4E(O) / VARXP4E(O) (mid-section for end-to-end)	38 / 4	48 / 6	27 / 3	60 / 6	57 / 6	27 / 6
VAR4BE(O) (mid-section for back-to-back / end-to-end)	76 / 8	96 / 12	54 / 6	120 / 12	114 / 12	54 / 12

Maximums listed above are based on the largest casing configuration of double/single mailbox modules that fit into each type of shelter or station. Refer to the casing images below to make your versatileTM 4C mailbox module selection. Back-to-back shelters may utilize a different configuration on each side of the shelter. Due to casing trim, 2 single-column modules may not be substituted for a double-column module, except in the casing options shown below.

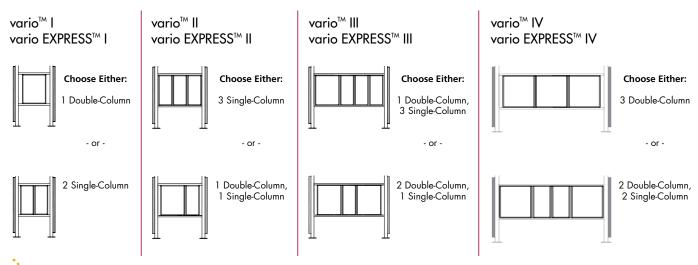

THE Perfect Mail Station Accessories



sentinel™ solar site lite

The sentinel™ solar site lite comes in either surface or in-ground mounting options and has either a 2' or 5' riser option. Available in three weather-resistent powder coat color options, the sentinelTM is the perfect addition to all your pedestrian settings. The light head design and positioning fully complies with the objectives of the International Dark-sky Association (IDA) and is completely self-contained; no electricity necessary. The LED light mechanism and all electrical components are enclosed in a vandal-resistant ABS light housing. Adjustable motion sensor activation prolongs the life of the battery and controls light exposure to surrounding areas. The surface mount base is designed to fit around Florence Manufacturing's vital™ 1570 cluster box unit pedestal; while a separate option may be installed as part of a vario EXPRESSTM mail station kit.



sentinel™ solar site lite shown in sandstone

Florence Site Furnishings by Victor Stanley

Florence Manufacturing is pleased to partner with Victor Stanley, Inc® in supplying VICTOR STANLEY, INC. a complete line of quality site furnishings. This in-stock line of furnishings will help



you create an attractive community gathering area around your centralized mail delivery center. Victor Stanley, Inc® uses a process they have coined as Publicote™ - an elaborate powder coating process that provides a baked resin coating on all exposed steel. This ensures long life for your investment. In addition, special features of the receptacles include rubbertipped leveling feet and inserts; as well as, in-ground and surface mount options for benches and bike racks.









VSFLR36 Litter Receptacle (VSFLR24 not shown)



VSFPLNT Planter

VSFAURN Ash Urn



Design to Meet Changing Needs

Once again Florence Manufacturing has partnered with the USPS to provide a superior product which meets your ever increasing security and parcel delivery needs. The redesigned valiantTM 1590 series meets all the "F" CBU security standards set by the USPS and is part of the outdoor delivery equipment contract awarded solely to Florence Manufacturing. As the exclusive provider of the Outdoor Parcel Locker to the USPS, Florence is pleased to bring you yet another product they depend upon every day!

Lock Type



The 1590 OPL series comes standard with a K91910 double cam lock

K91910

Powder Coat Color Options

> Standard: Sandstone PMS 7501C

Optional:

White PMS White

Silver Speck PMS 8770

Forest Green PMS 3308C

> Black PMS Black 6C

Dark Bronze PMS Black 7C

Replacement:

Postal Grey PMS 4130



1590T1SDAF in standard sandstone finish

Standard Features

- Robotically welded cabinet and hood seams
- Rugged, weather resistant powder coat finish resists scratching and vandalism
- Constructed of 300 series stainless steel and aircraft aluminum, including aluminum pedestal
- Master front-loading door designed to prevent prying with interlocking overlap seams
- Silver adhesive metal placards with black numbers 1P-2P
- Overall dimensions:
 16" W x 62" H x 18" D
- Compartment dimensions:
 12" W x 19-3/4" H x 15" D
- Patent pending parcel locking mechanism

ID Options

- 1P-99P parcel locker placards
- Engraved numbers/letters

Powder Coat

Color Options

Silver Speck

Optional:

White

PMS White

Sandstone

Forest Green PMS 33080

Postal Grey

PMS 7501C

Where Safe Mail Calls Home

Mail security isn't just for apartment buildings; it's for every mailbox in America. That's why Florence Manufacturing offers secure mail solutions for every mail application, including single family residential.

Florence residential products are weatherproof to protect delivered and outgoing mail from the elements. But unlike other boxes, Florence mail receptacles are fabricated with treated aluminum that resist rust and other signs of weathering to protect your investment as well as your mail. Plus, Florence residential mailboxes are large enough to secure up to two-weeks worth of normal mail delivery.



MB2000 box shown with MB2001P stand in standard silver speck

Standard Features

- Rugged, weather resistant powder coat finish resists scratching and vandalism
- Angled incoming mail slot deters
- Convenient outgoing mail shelf
- Large storage capacity can handle several days' mail

Optional Features

- Curbside/Post installation
- Unique spreader plate designed to accommodate multiple boxes
- Seven powder coat color options

USPS Standards for Placement

- 42-48" from road surface to point of mail entry
- 6-8" from front face of curb to mailbox door

Lock Type


The MB2000 residential mailbox series comes standard with a 200116 lock.



200116

MB2000 Models

MB2000Curbside MB
MB2001P MB post (in ground)
MB2001S MB stand (surface)
755005SP3" square MB post (in ground)
755004SP3" square MB stand (surface)
756202S*2-wide spreader plate
756203S* 3-wide spreader plate
756204S*4-wide spreader plate



* Spreader must be used with 3" square post or stand

Note: Users of the MB2000 are required to contact their local postal officials before installing the mailbox to ensure its correct placement.

Did you know?

Manufacturing Florence maintains many products in stock so they can be shipped within 48 hours. Contact your local Authorized Dealer for details.





Meeting Postal Regulations Made Easy

Changing postal standards can raise a lot of questions for anyone who deals with apartment mailboxes. The dilemma for property managers is whether to install Security Upgrade Kits (also available from Florence Manufacturing) in existing mailbox units to comply with STD-4B+, to get new mailbox units in compliance with STD-4B+, or to upgrade mailboxes to STD-4C. How do you decide? One easy way is to ask your local postal carrier. They may have recommendations to improve the security and convenience of your mail—a benefit to property managers, residents and the Postal Service alike. It's always a good idea to get the approval of your local postal authority before altering the mail system in your building. That way you can ensure that secure and convenient mail delivery is not interrupted for your residents.



Standard Features

- Grouped in combinations of 5, 6, or 7 compartments high and 3, 4, or 5 compartments wide
- Anodized aluminum finish
- 5-pin cylinder cam lock with two keys and 1,000 key changes
- Clear plastic number slots
- Lift-off rear cover on 1500 Series
- 15" deep compartments
- Recess-mounted only

Optional Features

- Surface-mounted, alphabetized directory
- Matching snap-on trim kit
- 5/8" high engraved numbers with or without black color fill
- Engraved tabs for number slots
- Hinged and locking rear cover
- Integrated parcel lockers
- Integrated mail collection boxes
- Seven door size options
- Seven powder coat color options
- 3-digit combination locks

Note: Florence 1400/1500 horizontal series is for indoor use only, not rated for outdoor use

Did you know?

As of October 6, 2006, USPS STD-4C compliant mailbox systems are MANDATORY on all new construction and major renovations. Mailboxes that are 4B+ compliant, such as the Florence 1400/1500 horizontal series, will only be considered USPS Approved if they are replacing existing mailboxes. Be sure to check with your local postal authority before undergoing any changes to your buildings mail system. Further details on the new mandatory regulation can be found on page 14.


Lock Type Options

Both the 1400 and 1500 horizontal series comes standard with a Hudson K30809 lock. Additional lock options or replacement locks are available, but not necessarily USPS Approved. Refer to page 31 for additional details.



K30809

1400/1500 Door Options

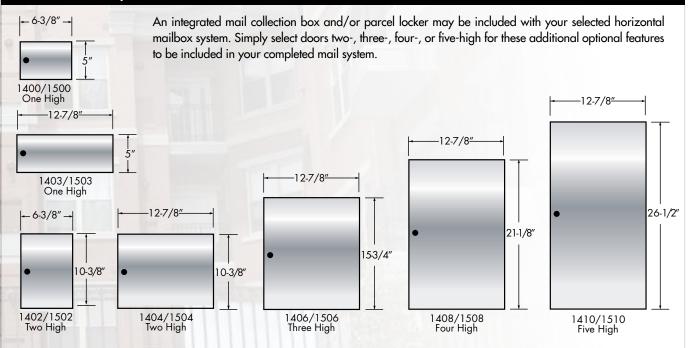

Optional Horizontal Directories (Smooth aluminum construction matches horizontal mailbox doors and powder coat color options)

D400

- Side-mount directory
- Designed to hold up to 200 names

D400-1	40 name capacity
D400-2	80 name capacity
D400-3	120 name capacity
D400-4	160 name capacity

D400-5

200 name capacity

D500

- Top-mount directory
- Available in 3, 4, or 5 units wide
- Designed to hold up to 40 names D500-3 24 name capacity

D500-4 32 name capacity

D500-5 40 name capacity

D600

- Side-mount directory
- Available in 4, 5, 6, or 7 units high
- Designed to hold up to 70 names

D600-4 40 name capacity D600-5 50 name capacity D600-6 60 name capacity

D600-7 70 name capacity





800-275-1747



1400/1500 Series Dimension Chart

HEIGHT DIMENSION 5 UNITS HIGH Actual 2' 4", Rough* Opening 2' 4-1/4"					
Numl tend			Rough* Wall		
Front Load	Rear Load	Model Number(s) and Quantities	Opening Width		
14	15	(1) 1500-53	1′ 9″		
19	20	(1) 1500-54	2' 3-1/2"		
24	25	(1) 1500-55	2' 9-7/8"		
38	40	(2) 1500-54	4' 6-3/4"		
43	45	(1) 1500-54 (1) 1500-55	5' 1-1/8"		
48	50	(2) 1500-55	5 '7-1/2"		
62	65	(2) 1500-54 (1) 1500-55	7' 4-3/8"		
72	<i>7</i> 5	(3) 1500-55	8' 5-1/8"		
76	80	(4) 1500-54	9' 1-1/4"		
81	85	(3) 1500-54 (1) 1500-55	9' 7-5/8"		
91	95	(1) 1500-54 (3) 1500-55	10' 8-3/8"		
96	100	(4) 1500-55	11' 2-3/4"		
105	110	(3) 1500-54 (2) 1500-55	12′ 5-1/4″		
124	130	(4) 1500-54 (2) 1500-55	14' 8-1/2"		
129	135	(3) 1500-54 (3) 1500-55	15′ 2-7/8″		
139	145	(1) 1500-54 (5) 1500-55	16′ 3-5/8″		
158	165	(2) 1500-54 (5) 1500-55	18' 6-7/8"		
163	170	(1) 1500-54 (6) 1500-55	19′ 1-1/4″		
182	190	(2) 1500-54 (6) 1500-55	21' 4-1/2"		
192	200	(8) 1500-55	22′ 5-1/4″		
196	205	(4) 1500-54 (5) 1500-55	23′ 1-3/8″		
211	220	(1) 1500-54 (8) 1500-55	24' 8-1/2"		
216	225	(9) 1500-55	25' 2-7/8"		

Security Upgrade Kit


Installing a security upgrade kit improves lock strength and greater resistance to the most common methods of attack. Florence Manufacturing kits far exceed the current mailbox safety standards and are designed to harden both the Postal Arrow Lock and Master Gate Door. This USPS approved kit is easy to install, taking only a few tools and a little time.



HEIGHT DIMENSION 6 UNITS HIGH Actual 2' 9-3/8", Rough* Opening 2' 95/8"					
1 <i>7</i>	18	(1) 1500-63	1′ 9″		
23	24	(1) 1500-64	2' 3-1/2"		
29	30	(1) 1500-65	2' 9-7/8"		
34	36	(2) 1500-63	3' 5-3/4"		
46	48	(2) 1500-64	4' 6-3/4"		
52	54	(1) 1500-64 (1) 1500-65	5' 1-1/8"		
58	60	(2) 1500-65	5' 7-1/2"		
63	66	(1) 1500-63 (2) 1500-64	6' 3-1/2"		
69	72	(3) 1500-64	6′ 10″		
<i>7</i> 5	78	(2) 1500-64 (1) 1500-65	7' 4-3/8"		
87	90	(3) 1500-65	8' 5-1/8"		
92	96	(4) 1500-64	9' 1-1/4"		
98	102	(3) 1500-64 (1) 1500-65	9' 7-5/8"		
104	108	(2) 1500-64 (2) 1500-65	10′ 2″		
110	114	(1) 1500-64 (3) 1500-65	10' 8-3/8"		
116	120	(4) 1500-65	11' 2-3/4"		
133	138	(2) 1500-64 (3) 1500-65	12′11-5/8″		
139	144	(1) 1500-64 (4) 1500-65	13′ 6″		
145	150	(5) 1500-65	14' 0-3/8"		
150	156	(4) 1500-64 (2) 1500-65	14' 8-1/2"		
156	162	(3) 1500-64 (3) 1500-65	15' 2-7/8"		
174	180	(6) 1500-65	16′ 10″		
185	192	(3) 1500-64 (4) 1500-65	18' 0-1/2"		
191	198	(2) 1500-64 (5) 1500-65	18' 6-7/8"		
197	204	(1) 1500-64 (6) 1500-65	19′ 1-1/4″		
214	222	(3) 1500-64 (5) 1500-65	20′ 10-1/8″		
220	228	(2) 1500-64 (6)1500-65	21' 4-1/2"		
226	234	(1) 1500-64 (7) 1500-65	21′ 10-7/8″		
232	240	(8) 1500-65	22′ 5-1/4″		
239	248	(4) 1500-64 (5) 1500-65	23′ 1-3/8″		
249	258	(2) 1500-64 (7) 1500-65	24' 2-1/8"		
255	264	(1) 1500-64 (8) 1500-65	24' 8-1/2"		
261	270	(9) 1500-65	25′ 2-7/8″		

Above dimensions apply to both 1400 and 1500 series.

Installation



The minimum wall opening depth is 17". The number of usable units is for rear-loading boxes. If figuring front-loading boxes, choose 1400 Series and deduct one usable unit per box for the master door.

Master keying is not 70" permitted by USPS max. regulations.

Note: Horizontal mailbox installations should be protected from direct exposure to weather. The manufacturer is not responsible for damage caused by weather conditions.

HEIGHT DIMENSION 7 UNITS HIGH Actual 3' 2-3/4", Rough* Opening 3' 3"

		3 7 7 8 3 8 18 3	
	per of ants		Rough* Wall
Front Load	Rear Load	Model Number(s) and Quantities	Opening Width
20	21	(1) 1500-73	1′ 9″
27	28	(1) 1500-74	2' 3-1/2"
34	35	(1) 1500-75	2' 9-7/8"
40	42	(2) 1500-73	3' 5-3/4"
47	49	(1) 1500-73 (1) 1500-74	4' 0-1/4"
54	56	(2) 1500-74	4' 6-3/4"
61	63	(1) 1500-74 (1) 1500-75	5' 1-1/8"
68	70	(2) 1500-75	5' 7-1/2"
74	77	(1) 1500-73 (2) 1500-74	6′ 3-1/2″
81	84	(3) 1500-74	6′ 10″
88	91	(2) 1500-74 (1) 1500-75	7' 4-3/8"
95	98	(1) 1500-74 (2) 1500-75	7' 10-3/4"
102	105	(3) 1500-75	8' 5-1/8"
108	112	(4) 1500-74	9' 1-1/4"
115	119	(3) 1500-74 (1) 1500-75	9' 7-5/8"
122	126	(2) 1500-74 (2) 1500-75	10′ 2″
129	133	(1) 1500-74 (3) 1500-75	10' 8-3/8"
136	140	(4) 1500-75	11' 2-3/4"
142	147	(4) 1500-74 (1) 1500-75	11′ 10-7/8″
149	154	(3) 1500-74 (2) 1500-75	12' 5-1/4"
156	161	(2) 1500-74 (3) 1500-75	12' 11-5/8"
163	168	(1) 1500-74 (4) 1500-75	13′ 6″
1 <i>7</i> 0	175	(5) 1500-75	14' 0-3/8"
1 <i>7</i> 6	182	(4) 1500-74 (2) 1500-75	14′ 8-1/2″
183	189	(3) 1500-74 (3) 1500-75	15′ 2-7/8″
190	196	(2) 1500-74 (4) 1500-75	15′ 9-1/4″
197	203	(1) 1500-74 (5) 1500-75	16′ 3-5/8″
204	210	(6) 1500-75	16′ 10″
210	217	(4) 1500-74 (3) 1500-75	17′ 6-1/8″
217	224	(3) 1500-74 (4) 1500-75	18' 0-1/2"
224	231	(2) 1500-74 (5) 1500-75	18' 6-7/8"
231	238	(1) 1500-74 (6) 1500-75	19′ 1-1/4″
238	245	(7) 1500-75	19' 7-5/8"
244	252	(4) 1500-74 (4) 1500-75	20′ 3-3/4″
251	259	(3) 1500-74 (5) 1500-75	20' 10-1/8"
258	266	(2) 1500-74 (6) 1500-75	21' 4-1/2"
265	273	(1) 1500-74 (7) 1500-75	21′ 10-7/8″
272	280	(8) 1500-75	22′ 5-1/4″
278	287	(4) 1500-74 (5) 1500-75	23' 1-3/8"
285	294	(3) 1500-74 (6) 1500-75	23' 7-3/4"
292	301	(2) 1500-74 (7) 1500-75	24' 2-1/8"
299	308	(1) 1500-74 (8) 1500-75	24' 8-1/2"
306	315	(9) 1500-75	25' 2-7/8"
		-	

Did you know?

STD-4B+ was implemented in late 2004 and applies to apartment mailboxes. This USPS regulation requires improved Arrow lock compartment security on all horizontal and vertical wall-mounted mailboxes. In many cases, the STD-4B+ product designs include hardened Arrow lock bracketry and master gate doors as well as the removal of an outgoing mail slot.

^{*}To figure the actual width, deduct 1/4" from the rough opening dimension.

^{*}Orders for non-standard mailbox configurations may not be accepted or may result in longer lead times.

ID Options for Florence Mailbox Systems

Florence Manufacturing provides several different ID options for your replacement mailboxes. Simply select the option that best suits your project needs from the examples shown below.


Engraving



Black Fill Engraving



Clear Vision Window



Metal Placards



Engraved ID Tag



Number Slot



Note: Not all ID Options are available on all products; see individual product pages for specific ID details.

Standard Engraving



Florence Manufacturing utilizes the USPS Standard US Block 1L font for all engraving. This 5/8" high engraving may be created with or without black color fill and can contain up to six characters, depending upon door size. Custom engraving is available upon request.

Contact your local Authorized Florence Dealer or call 800-275-1747 for additional details and/or samples of the ID options shown above.

A Name You Trust

Florence Manufacturing is pleased to continue to offer the 2600 American Device series of high security vault-type horizontal mailboxes designed especially for use in high crime and vandal prone areas. Boasting a unique three-point locking system American Device (see image on facing page) and an interlocking



feature on hinge-side of door, our American Device product line provides extra security if the hinge pin is tampered with. This line of horizontal boxes comes in both a front-loading with built-on trim (2600F-VT) option and rear-loading with snap-on trim (2600R-VT) option.



Standard Features

- Grouped in combinations of 5, 6, or 7 compartments high and 3, 4, or 5 compartments wide
- Anodized aluminum finish
- 5-pin cylinder cam lock with two keys and 1,000 key changes
- Clear plastic number slots
- Lift-off rear cover on 2600R Series
- 15" deep compartments
- Recess-mounted only
- Built-on trim (front-load only)

Optional Features

- Surface-mounted, alphabetized
- Matching snap-on trim kit (rear-load
- 5/8" high engraved numbers with or without black color fill
- Engraved tabs for number slots
- Hinged and locking rear cover
- Integrated parcel lockers
- Integrated mail collection boxes
- Larger door sizes
- Seven powder coat color options

Note: Florence 2600 American Device horizontal series is for indoor use only, not rated for outdoor use





The 2600 American Device horizontal series comes standard with a K1111-116 lock. Additional lock options or replacement locks are available, but not necessarily USPS Approved.


Refer to page 31 for additional details.

Lock Type Options

K1111-116

Florence 2600 American Device Horizontal Series Door Options

An integrated mail collection box and/or parcel locker may be included with your selected horizontal mailbox system. Simply select doors two- or three-high for these additional optional features to be included in your completed mail system.

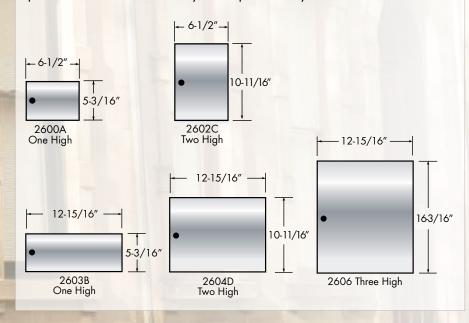

Optional Integral Mail Collection Units

2162 Series

2162 MAIL COLLECTION BOX MODELS					
Model Number Number of Doors High					
2162-1	1				
2162-2	2				
2162-3	3				
2162-4	4				



Optional Horizontal Directory

D2600

Top-mount directory for the Florence 2600 American Device horizontal mailbox series. Smooth aluminum construction matches horizontal mailbox doors and powder coat color options selected.



Did you know?



As a dynamic company, Florence Manufacturing significantly expanded its product offering with the acquisition of the

American Device Postal Specialties line in July 1998. A perfect complement to Florence postal specialties, American Device products have been known for their strength, security and long lasting durability.



Florence 2600 American Device Horizontal Series Front-Loading Dimension Chart

5 UNITS HIGH	Height Dimension inches Cabinet Net Overall Trim Rough Opening	Directory 28 — 29-3/4 36-5/8	6 UNITS HIGH	Height Dimen inches Cabinet Net Overall Trim Rough Openir	Directory 33-1/2 — 35-1/4 42-1/8	7 Units High	Height Dimensi inches Cabinet Net Overall Trim Rough Opening	Directory 39 — 40-3/4 47-5/8	Width Di	mensions, I	nches
Number of Tenants*	Order Model Number	Arrangement and Number* of Compartments in Each Cabinet	Number of Tenants*	Order Model Number	Arrangement and Number* of Compartments in Each Cabinet	Number of Tenants*	Order Model Number	Arrangement and Number* of Compartments in Each Cabinet	Number of Postal Master Locks Required	Overall Trim Width	Rough Opening Width
14	2600F5-15	15	17	2600F6-18	18	20	2600F7-21	21	1	22-3/4	21-3/4
19	2600F5-20	20	23	2600F6-24	24	27	2600F7-28	28	1	29-1/4	28-1/4
24	2600F5-25	25	29	2600F6-30	30	34	2600F7-35	35	1	35-3/4	34-3/4
28	2600F5-30	15-15	34	2600F6-36	18-18	40	2600F7-42	21-21	2	45-1/2	44-1/2
33	2600F5-35	15-20	40	2600F6-42	18-24	47	2600F7-49	21-28	2	52	51
38	2600F5-40	20-20	46	2600F6-48	24-24	54	2600F7-56	28-28	2	58-1/2	57-1/2
43	2600F5-45	20-25	52	2600F6-54	24-30	61	2600F7-63	28-35	2	65	64
48	2600F5-50	25-25	58	2600F6-60	30-30	68	2600F7-70	35-35	2	71-1/2	70-1 <i>/</i> 2
52	2600F5-55	20-20-15	63	2600F6-66	24-24-18	74	2600F7-77	28-28-21	3	81-1/4	80-1/4
57	2600F5-60	20-20-20	69	2600F6-72	24-24-24	81	2600F7-84	28-28-28	3	87-3/4	86-3/4
62	2600F5-65	20-20-25	75	2600F6-78	24-24-30	88	2600F7-91	28-28-35	3	94-1/4	93-1/4
67	2600F5-70	20-25-25	81	2600F6-84	24-30-30	95	2600F7-98	28-35-35	3	100-3/4	99-3/4
72	2600F5-75	25-25-25	87	2600F6-90	30-30-30	102	2600F7-105	35-35-35	3	107-1/4	106-1/4
76	2600F5-80	20-20-20-20	92	2600F6-96	24-24-24-24	108	2600F7-112	28-28-28-28	4	117	116
81	2600F5-85	20-20-20-25	98	2600F6-102	24-24-24-30	115	2600F7-119	28-28-28-35	4	123-1/2	122-1/2
86	2600F5-90	20-20-25-25	104	2600F6-108	24-24-30-30	122	2600F7-126	28-28-35-35	4	130	129
91	2600F5-95	20-25-25-25	110	2600F6-114	24-30-30-30	129	2600F7-133	28-35-35-35	4	136-1/2	135-1/2
96	2600F5-100	25-25-25	116	2600F6-120	30-30-30-30	136	2600F7-140	35-35-35-35	4	143	142
100	2600F5-105	25-25-25-15-15	121	2600F6-126	24-24-24-24-30	142	2600F7-147	28-28-28-28-35	5	152-3/4	151-3/4
105	2600F5-110	25-25-25-20-15	127	2600F6-132	24-24-24-30-30	149	2600F7-154	28-28-28-35-35	5	159-1/4	158-1/4
110	2600F5-115	25-25-25-20-20	133	2600F6-138	24-24-30-30-30	156	2600F7-161	28-28-35-35-35	5	165-3/4	164-3/4
115	2600F5-120	25-25-25-20	139	2600F6-144	24-30-30-30-30	163	2600F7-168	28-35-35-35	5	172-1/4	171-1/4
120	2600F5-125	25-25-25-25	145	2600F6-150	30-30-30-30	170	2600F7-175	35-35-35-35	5	178-3/4	177-3/4
124	2600F5-130	25-25-25-25-15-15	150	2600F6-156	24-24-24-24-30-30	176	2600F7-182	28-28-28-28-35-35	6	188-1/2	187-1/2
129	2600F5-135	25-25-25-25-20-15	156	2600F6-162	24-24-24-30-30-30	183	2600F7-189	28-28-28-35-35-35	6	195	194
134	2600F5-140	25-25-25-25-20-20	162	2600F6-168	24-24-30-30-30-30	190	2600F7-196	28-28-35-35-35-35	6	201-1/2	200-1/2
139	2600F5-145	25-25-25-25-20	168	2600F6-174	24-30-30-30-30	197	2600F7-203	28-35-35-35-35	6	208	207
144	2600F5-150	25-25-25-25-25	174	2600F6-180	30-30-30-30-30	204	2600F7-210	35-35-35-35-35	6	214-1/2	213-1/2

Note: Horizontal mailbox installations should be protected from direct exposure to the weather; Florence Manufacturing is not responsible for damage caused by weather conditions. Orders for non-standard mailbox configurations may not be accepted, or may result in longer lead times.

Company History



Florence Manufacturing is proud to trace its heritage of founding/acquired companies to the late 1800s. For more than a century, the Florence line of Division 10 55 00 postal specialties has maintained industry leadership by offering consistently superior product quality and rapid, reliable

customer service. Our commitment to craftsmanship is shown by being the first manufacturer in our industry to be ISO 9001:2000 certified, and we continually surpass all required audits. We strive to be environmentally friendly with strong recycling programs and business practices and are pleased to be a committed community partner in our headquarters location of Manhattan, Kansas.

Founded by Saulia Florence and Herbert Dix in 1934 as Florence Manufacturing Company, we have continually strived to meet the changing market needs. As a dynamic, growing company, we acquired Auth Electric and started doing business as Auth-Florence Manufacturing in 1990. This hundred-year young company expanded our product offering to include Auth-Chimes – a quality product which has since been seen on the popular Seinfeld TV series. We significantly expanded our product offering once again with the acquisition of the American Device Postal Specialties line in July 1998. Two short years later, Florence Corporation acquired Cutler Manufacturing Corporation - a venerable century old company that had manufactured postal products for the likes of the Empire State Building and the John Hancock Building. Being awarded the USPS Outdoor Delivery Equipment contract in 2005 firmly solidified our position as a pillar of the industry. Florence Corporation further strengthened its market position with its acquisition by Gibraltar Industries (NASDAQ:ROCK) in August 2007. Florence was pleased to expand its product line once again to provide outdoor site furnishings for your neighborhood mail center by developing a business partnership with Victor Stanley Inc in 2008.

Today, Florence Manufacturing continues to introduce new products to meet your mail delivery needs. We are proud to have built relationships with the most extensive national dealer network in our industry - which enables us to provide you with local expertise for your specific mail center projects. To find an Authorized Florence Dealer nearest you, learn more about our extensive product lines or about our company, visit florencemailboxes.com. To learn more about our parent company, visit gibraltar 1.com.

Florence 2600 American Device Horizontal Series Rear-Loading Dimension Chart

5 UNITS HIGH		nsions, inches 28 31-3/4 ng 29-1/2	6 UNITS HIGH		37-1/4	7 UNITS HIGH	Height Dimer Cabinet Net Overall Trim Rough Openi	39 42-3/4	Width [)imensions,	Inches
Number of Tenants	Order Model Number	Arrangement and Number of Compartments in Each Cabinet	Number of Tenants	Order Model Number	Arrangement and Number of Compartments in Each Cabinet	Number of Tenants	Order Model Number	Arrangement and Number of Compartments in Each Cabinet	Cabinet Net Width	Overall Trim Width	Rough Opening Width
15	2600R5-15	15	18	2600R6-18	18	21	2600R7-21	21	20	23-3/4	21-1/2
20	2600R5-20	20	24	2600R6-24	24	28	2600R7-28	28	26-1/2	30-1/4	28
25	2600R5-25	25	30	2600R6-30	30	35	2600R7-35	35	33	36-3/4	34-1/2
30	2600R5-30	15-15	36	2600R6-36	18-18	42	2600R7-42	21-21	40	43-3/4	41-1/2
35	2600R5-35	15-20	42	2600R6-42	18-24	49	2600R7-49	21-28	46-1/2	50-1/4	48
40	2600R5-40	20-20	48	2600R6-48	24-24	56	2600R7-56	28-28	53	56-3/4	54-1/2
45	2600R5-45	20-25	54	2600R6-54	24-30	63	2600R7-63	28-35	59-1/2	63-1/4	61
50	2600R5-50	25-25	60	2600R6-60	30-30	70	2600R7-70	35-35	66	69-3/4	67-1/2
55	2600R5-55	20-20-15	66	2600R6-66	24-24-18	77	2600R7-77	28-28-21	73	76-3/4	74-1/2
60	2600R5-60	20-20-20	72	2600R6-72	24-24-24	84	2600R7-84	28-28-28	79-1/2	83-1/4	81
65	2600R5-65	20-20-25	78	2600R6-78	24-24-30	91	2600R7-91	28-28-35	86	89-3/4	87-1/2
70	2600R5-70	20-25-25	84	2600R6-84	24-30-30	98	2600R7-98	28-35-35	92-1/2	96-1/4	94
75	2600R5-75	25-25-25	90	2600R6-90	30-30-30	105	2600R7-105	35-35-35	99	102-3/4	100-1/2
80	2600R5-80	20-20-20-20	96	2600R6-96	24-24-24-24	112	2600R7-112	28-28-28-28	106	109-3/4	107-1/2
85	2600R5-85	20-20-20-25	102	2600R6-102	24-24-24-30	119	2600R7-119	28-28-28-35	112-1/2	116-1/4	114
90	2600R5-90	20-20-25-25	108	2600R6-108	24-24-30-30	126	2600R7-126	28-28-35-35	119	122-3/4	120-1/2
95	2600R5-95	20-25-25-25	114	2600R6-114	24-30-30-30	133	2600R7-133	28-35-35-35	125-1/2	129-1/4	127
100	2600R5-100	25-25-25-25	120	2600R6-120	30-30-30-30	140	2600R7-140	35-35-35	132	135-3/4	133-1/2
105	2600R5-105	25-25-25-15-15	126	2600R6-126	24-24-24-24-30	147	2600R7-147	28-28-28-25	139	142-3/4	140-1/2
110	2600R5-110	25-25-25-20-15	132	2600R6-132	24-24-24-30-30	154	2600R7-154	28-28-28-35-35	145-1/2	149-1/4	147
115	2600R5-115	25-25-25-20-20	138	2600R6-138	24-24-30-30-30	161	2600R7-161	28-28-35-35-35	152	155-3/4	153-1/2
120	2600R5-120	25-25-25-20	144	2600R6-144	24-30-30-30-30	168	2600R7-168	28-35-35-35	158-1/2	162-1/4	160
125	2600R5-125	25-25-25-25	150	2600R6-150	30-30-30-30	175	2600R7-175	35-35-35-35	165	168-3/4	166-1/2
130	2600R5-130	25-25-25-15-15	156	2600R6-156	24-24-24-24-30-30	182	2600R7-182	28-28-28-35-35	172	175-3/4	173-1/2
135	2600R5-135	25-25-25-20-15	162	2600R6-162	24-24-24-30-30-30	189	2600R7-189	28-28-28-35-35-35	178-1/2	182-1/4	180
140	2600R5-140	25-25-25-20-20	168	2600R6-168	24-24-30-30-30-30	196	2600R7-196	28-28-35-35-35	185	188-3/4	186-1/2
145	2600R5-145	25-25-25-25-20	174	2600R6-174	24-30-30-30-30	203	2600R7-203	28-35-35-35-35	191-1/2	195-1/4	193
150	2600R5-150	25-25-25-25-25	180	2600R6-180	30-30-30-30-30	210	2600R7-210	35-35-35-35-35	198	201-3/4	199-1/2

Horizontal Mailbox System Lock Type Options - Private Delivery

Florence Manufacturing is pleased to supply locks for your horizontal mailbox systems; however, in some cases the selected lock may change your mail system to a private delivery system. Be sure to check with your local postal authority for clarification and your local Authorized Florence Dealer for product details.



Part # 30815



Part # 1111-114 (American Device only)



Part # 30803 (lock) Part # 59801 (housing) (Florence only)



Part # 30799

Graphite type lubricants only are recommended on all product locks. For additional assistance with locks, contact your local locksmith.

lock suppliers

The following manufactured, customersupplied locks (listed by cylinder number) are compatible with Florence mailboxes:

Arrow	AD615
Best	A7117
Falcon	6060,A11485,A11491,C982
Sargent	4101
Schlage	20-066,20-067,20-069
Weiser	11485,11491
Yale	C1810



Traditionally Built

Florence 1250 vertical series mailboxes are designed for use in small, multi-family buildings. They are constructed of durable, heavy-gauge extruded aluminum. Doors and trim are striated to resist scratching. Mailboxes feature a fully-recessed mount, semi-recessed mount, or surface mount option to complement any installation. Designed to meet USPS STD-4B+, the Florence 1250 series has stronger compartment locks and master doors that better resist the more common methods of tampering. These boxes are ideal replacement options to ensure your residents continue to have safe and secure mail delivery options.



Standard Features

- Recessed (6-3/4"), Semi-recessed (3-3/4": Requires SR-120 collar) and Surface-mount (Requires SMS-125 collar) options available
- Door Size: 16" H x 5-1/2" W
- Compartment Size:
 16-1/2" H x 5" W x 6" D
- Anodized aluminum or anodized gold standard finish
- 5-pin cylinder locks with two keys, 1,000 key changes
- Resident name and number ID card holders

Powder Coat Color Options

> Sandstone PMS 7501C

Dark Bronze PMS Black 70

> Black PMS Black 6C

Silver Speck PMS 877C

> Gold PMS 871C

Postal Grey PMS 413C

Did you know?

As of October 6, 2006, USPS STD-4C compliant mailbox systems are MANDATORY on all new construction and major renovations. Mailboxes that are 4B+ compliant, such as Florence 1250 vertical series, will be considered USPS Approved if they are replacing existing mailboxes. Be sure to check with local postal authorities before undergoing any changes to your buildings mail system. This way you can ensure that secure and convenient mail delivery is not interrupted for you and your residents. Further details on the new mandatory STD-4C regulations can be found on page 14, by contacting your local Authorized Florence Dealer or by visiting florencemailboxes.com.

Optional Features

- 1255 series with integral 40 name directory
- Doorbell push buttons for fully recessed units only
- 1260 series with double wide door and optional outgoing mail slot
- Engraved doors
- Postal to private conversion kit
- Six powder coat color options

Note: Florence 1250 vertical series is for indoor use only, not rated for outdoor use

Lock Type Options

The 1250 vertical series comes standard with a Hudson K30809 lock.



Optional Vertical Directory



Model #	Name Capacity
D300-1	40
D300-2	80
D300-3	120
D300-4	160
D300-5	200

D300

- Designed for independent use or with vertical mailboxes
- Striated finish matches doors and trim of vertical mailboxes
- Designed to hold up to 200 names

Dimensions

19-1/8"H x 7-7/8"W 19-1/8"H x 13-5/16"W 19-1/8"H x 18-7/8"W 19-1/8"H x 24-3/8"W 19-1/8"H x 29-7/8"W

1250SMS Series

1250 series available in surface-mount option using SMS-125 collar or as a complete surface mount unit





1255 Series

1255 series available with optional integrated 40 name directory



1260 Series

1260 series available with double-wide door and optional outgoing mail slot





Vertical 1250 Series Dimension Charts

VERTICAL MAILBOXES WITH INTEGRAL DIRECTORY							
Model Number	Number of Directories	Number of Standard Compartments	Dimensions Same As				
1255-13	1	3	12504H				
1255-14	1	4	12505H				
1255-15	1	5	12506H				
1255-16	1	6	12507H				
1255-23	2	3	12505H				
1255-24	2	4	12506H				
1255-25	2	5	12507H				

VERTICAL MAILBOX WITH DOUBLE-WIDE OUTGOING MAIL SLOT							
Model Number							
1260-13	1	3	12505H				
1260-14	1	4	12506H				
1260-15	1	5	12507H				
1260-21	2	1	12505H				
1260-22	2	2	12506H				
1260-23	2	3	12507H				

VERTICAL MAILBOX WITH DOUBLE-WIDE OUTGOING MAIL SLOT						
Single Row	Double Row	Layout Per Row	Wall Cut Width	Overall Width		
3	6	3	1 <i>7</i> -1/2"	19"		
4	8	4	23"	24-1/2"		
5	10	5	28-5/8"	30-1/8"		
6	12	6	34-1/8"	35-5/8"		
7	14	7	39-5/8"	41-1/8"		
8	16	4-4	47-1/2"	49"		
9	18	5-4	53-1/8"	54-5/8"		
10	20	5-5	58-3/4"	60-1/4"		
11	22	6-5	64-1/4"	65-3/4"		
12	24	6-6	69-3/4"	71-1/4"		
13	26	7-6	75-1/4"	76-3/4"		
14	28	7-7	80-3/4"	82-1/4"		
15	30	5-5-5	88-7/8"	90-3/8"		
16	32	5-6-5	94-3/8"	95-7/8"		
1 <i>7</i>	34	6-6-5	99-7/8"	101-3/8"		
18	36	6-6-6	105-3/8"	106-7/8"		
19	38	6-6-7	110-7/8"	112-3/8"		
20	40	7-7-6	116-3/8"	11 <i>7-7/</i> 8″		
21	42	7-7-7	121-7/8"	123-3/8"		
22	44	6-6-6-4	129-7/8"	131-3/8"		
23	46	6-6-6-5	135-1/2"	137"		
24	48	6-6-6-6	141"	142-1/2"		
25	50	7-6-6-6	146-1/2"	148"		
26	52	7-7-7-5	152"	153-1/2"		
27	54	7-7-7-6	157-1/2"	159"		
28	56	7-7-7-7	163"	164-1/2"		
29	58	6-6-6-5	171-1/8"	172-5/8"		
30	60	6-6-6-6	176-5/8"	1 <i>7</i> 8-1/8″		

Single Row Wall Cut Depth = 6-3/4" Wall Cut Height = 17-3/4" Overall Height = 19-1/8"

Double RowWall Cut Depth = 6-3/4"
Wall Cut Height = 37"
Overall Height = 39-1/4"

Note: Vertical mailbox installations should be protected from direct exposure to the weather. The manufacturer is not responsible for damage caused by weather conditions.

VERTICAL MAILBOX MODEL NUMBERS			
Number of Compartments	Standard Model Number	Surface Mount Model Number	
3	12503H	12503SMSH	
4	12504H	12504SMSH	
5	12505H	12505SMSH	
6	12506H	12506SMSH	
7	12507H	12507SMSH	


MOUNTING COLLAR MODEL NUMBERS			
Mailbox	Semi-Recess Mounted Collar	Surface Mounted Collar	
12503H	SR1203	SMS1253	
12504H	SR1204	SMS1254	
12505H	SR1205	SMS1255	
12506H	SR1206	SMS1256	
12507H	SR1207	SMS1257	

Security Upgrade Kit

Florence security kits are USPS approved and contain sturdy components made from heavy gauge materials to strengthen your existing box against vandalism. Installation takes only minutes and a few tools, but provides years of tampering and theft protection.




Installation




FINISHED FLOOR FINISHED

DOUBLE ROW
FULLY-RECESSED

6-3/4"
min. wall
depth



FULLY-RECESSED SURFACE MOUNTED 6-3/4" 6-7/8" min. wall depth Finished wall 17-3/4" R.O. 19-1/8" cabinet 60" 60" max. max. 16" min. FINISHED FLOOR FINISHED FLOOR



Product Color Options


Note: Pantone colors shown in parentheses for reference purposes. Not all colors available on all products, see individual product pages for details.



Sandstone (PMS 7501C) - Flat or Pebble Finish -




Black (PMS Black 6C) - Flat or Pebble Finish -




White (PMS White) - Pebble Finish -




Forest Green (PMS 3308C) - Pebble Finish -




Dark Bronze (PMS Black 7C) - Flat or Pebble Finish -




Postal Grey (PMS 413C)



*Blonde Gold (PMS 7536C)



Silver Speck (PMS 877C)



*Blonde Gold and anodized metal finishes are not rated for outdoor use and are intended for inside installations only. All other powder coat paint color options available are weather-resistant and may be used for either indoor or outdoor installations. Paint chip samples are available by request.

Metal Finishes:







*Gold Anodized

Private Distribution is No Secret

It surprises some people that the USPS doesn't deliver directly to every mailbox in America. The concept of private distribution can seem even a bit strange; once delivered to a centralized location, it is distributed to individual resident mailboxes by a property manager or similar entrusted individual. Although a mystery to some, Florence Manufacturing understands the unique needs of residents who receive privately distributed mail. While certain needs such as keying and master access are different, other needs, like security, are the same. That is why we apply the expertise gained from our USPS partnership to these private distribution options - helping ensure all residents receive the same benefits.





- Grouped in combinations of 9, 10, 11, or 12 compartments high and 3, 4, or 5 compartments wide
- 5-pin cylinder cam locks with two keys and 1,000 key changes
- Clear plastic number slots
- Private master lock on the 1450
 Series
- 15" deep compartments
- Anodized aluminum finish

Optional Features

- Snap-on trim kit
- 3-digit combination locks
- 5/8" high engraved numbers with or without black fill numbers
- Engraved tabs for number slots
- Lift-off or locking rear cover available on 1550 series
- Seven door size options
- Seven powder coat color options

Note: Florence 1450/1550 horizontal series is for indoor use only, not rated for outdoor use

1450/1550 Doors

6-3/8"

12-7/8"

1453/1553

One High

1454/1554

Two High

Note:

An integrated

mail collection

box and/or parcel locker may be included with

your selected horizontal system.

9-3/4"

13-1/8"

16-1/2"

† 3″

6-3/8"

6-3/8"_

1450/1550 One High

1452/1552

Two High

12-7/8"

1456/1556

Three High

-12-7/8"

1458/1558 Four High

-12-7/8"

Lock Type Options

Both the 1450 and 1550 horizontal series comes standard with a Hudson K30809 lock. Additional lock options or replacement locks are available, but not necessarily USPS Approved. Refer to page 31 for additional details.



HEIGHT DIMENSION

9 UNITS HIGH Actual 2' 7-1/2", Rough* Opening 2' 7-3/4"

Number of			Daumh*
	ants		Rough*
Front	Rear	Model Number(s)	Opening
Load	Load	and Quantities	Width
26	27	(1) 1550-93	1′ 9″
35	36	(1) 1500-94	2' 3-1/2"
44	45	(1) 1550-95	2' 9-7/8"
61	63	(1) 1550-93 (1) 1550-94	4′ 0-1/4″
70	72	(2) 1550-94	4' 6-3/4"
79	81	(1) 1550-94 (1) 1550-95	5' 1-1/8"
88	90	(2) 1550-95	5' 7-1/2"
96	99	(1) 1550-93 (2) 1550-94	6′ 3-1/2″
114	11 <i>7</i>	(2) 1550-94 (1) 1550-95	7' 4-3/8"
123	126	(1) 1550-94 (2) 1550-95	7' 10-3/4"
132	135	(3) 1550-95	8' 5-1/8"
140	144	(4) 1550-94	9' 1-1/4"
149	153	(3) 1550-94 (1) 1550-95	9' 7-5/8"
158	162	(2) 1550-94 (2) 1550-95	10′ 2″
167	171	(1) 1550-94 (3) 1550-95	10' 8-3/8"
184	189	(4) 1550-94 (1) 1550-95	11' 10-7/8"
193	198	(3) 1550-94 (2) 1550-95	12′ 5-1/4″
202	207	(2) 1550-94 (3) 1550-95	12' 11-5/8"
211	216	(1) 1550-94 (4) 1550-95	13′ 6″
220	225	(5) 1550-95	14' 0-3/8"
228	234	(4) 1550-94 (2) 1550-95	14' 8-1/2"
237	243	(3) 1550-94 (3) 1550-95	15′ 2-7/8″
246	252	(2) 1550-94 (4) 1550-95	15' 9-1/4"
255	261	(1) 1550-94 (5) 1550-95	16′ 3-5/8″
264	270	(6) 1550-95	16′ 10″

HEIGHT DIMENSION

10 UNITS HIGH Actual 2' 10-7/8", Rough* Opening 2' 11-1/8"

29	30	(1) 1550-103	1′ 9″
39	40	(1) 1550-104	2' 3-1/2"
49	50	(1) 1550-105	2' 9-7/8"
68	70	(1) 1550-103 (1) 1550-104	4' 0-1/4"
78	80	(2) 1550-104	4' 6-3/4"
88	90	(1) 1550-104 (1) 1550-105	5' 1-1/8"
98	100	(2) 1550-105	5' 7-1/2"
117	120	(3) 1550-104	6′ 10″
127	130	(2) 1550-104 (1) 1550-105	7' 4-3/4"
137	140	(1) 1550-104 (2) 1550-105	7'10-3/4"
147	150	(3) 1550-105	8' 5-1/8"
156	160	(4) 1550-104	9' 1-1/4"
166	170	(3) 1550-104 (1) 1550-105	9' 7-5/8"
186	190	(1) 1550-104 (3) 1550-105	10' 8-3/8"
196	200	(4) 1550-105	11' 2-3/4"
205	210	(2) 1550-103 (3) 1550-105	11' 10-5/8"
225	230	(2) 1550-104 (3) 1550-105	12' 11-5/8"
245	250	(5) 1550-105	14' 0-3/8"
254	260	(2) 1550-103 (4) 1550-105	14' 8-1/4"
274	280	(2) 1550-104 (4) 1550-105	15' 9-1/4"
284	290	(1) 1550-104 (5) 1550-105	16' 3-5/8"

Above dimensions apply to both 1450 and 1550 series.

*To figure the actual width, deduct 1/4" from the rough opening dimension.

*Orders for non-standard mailbox configurations may not be accepted or may result in longer lead times.

at www.florencemailboxes.com or call

HEIGHT DIMENSION

11 UNITS HIGH Actual 3' 2-1/4", Rough* Opening 3' 2-1/2"


Number of tenants			Rough* Wall	
Front	Rear	Model Number(s)	Opening	
Load	Load	and Quantities	Width	
32	33	(1) 1550-113	1′ 9″	
43	44	(1) 1550-114	2′ 3-1/2″	
54	55	(1) 1550-115	2' 9-7/8"	
64	66	(2) 1550-113	3' 5-3/4"	
75	77	(1) 1550-113 (1) 1550-114	4' 0-1/4"	
86	88	(2) 1550-114	4' 6-3/4"	
97	99	(1) 1550-114 (1) 1550-115	5' 1-1/8"	
108	110	(2) 1550-115	5' 7-1/2"	
118	121	(1) 1550-113 (2) 1550-114	6′ 3-1/2″	
129	132	(3) 1550-114	6′ 10″	
140	143	(2) 1550-114 (1) 1550-115	7' 4-3/8"	
151	154	(1) 1550-114 (2) 1550-115	7' 10-3/4"	
162	165	(3) 1550-115	8' 5-1/8"	
172	176	(4) 1550-114	9' 1-1/4"	
183	18 <i>7</i>	(3) 1550-114 (1) 1550-115	9' 7-5/8"	
194	198	(2) 1550-114 (2) 1550-115	10' 2"	
205	209	(1) 1550-114 (3) 1550-115	10' 8-3/8"	
216	220	(4) 1550-115	11' 2-3/4"	
226	231	(2) 1550-113 (3) 1550-115	11' 10-5/8"	
237	242	(3) 1550-114 (2) 1550-115	12′ 5-1/4″	
248	253	(2) 1550-114 (3) 1550-115	12' 11-5/8"	
270	275	(5) 1550-115	14' 0-3/8"	
280	286	(4) 1550-114 (2) 1550-115	14' 8-1/2"	
291	297	(3) 1550-114 (3) 1550-115	15' 2-7/8"	
302	308	(2) 1550-114 (4) 1550-115	15' 9-1/4"	
313	319	(1) 1550-114 (5) 1550-115	16' 3-5/8"	
324	330	(6) 1550-115	16′ 10″	
HEIGHT DIMENSION				

IGHT DIMENSIO12 UNITS HIGH

/	Actual 3	' 5-5/8", Rough* Opening 3'	5-//8"
35	36	(1) 1550-123	1′ 9″
47	48	(1) 1550-124	2' 3-1/2"
59	60	(1) 1550-125	2' 9-7/8"
82	84	(1) 1550-123 (1) 1550-124	4' 0-1/4"
94	96	(2) 1550-124	4' 6-3/4"
106	108	(1) 1550-124 (1) 1550-125	5′ 1-1/8″
118	120	(2) 1550-125	5′ 7-1/2″
141	144	(3) 1550-124	6′ 10″
153	156	(2) 1550-124 (1) 1550-125	7' 4-3/8"
165	168	(1) 1550-124 (2) 1550-125	7′ 10-3/4″
1 <i>77</i>	180	(3) 1550-125	8' 5-1/8"
188	192	(4) 1550-124	9' 1-1/4"
200	204	(3) 1550-124 (1) 1550-125	9' 7-5/8"
212	216	(2) 1550-124 (2) 1550-125	10′ 2″
224	228	(1) 1550-124 (3) 1550-125	10′ 8-3/8″
236	240	(4) 1550-125	11′ 2-3/4″
247	252	(4) 1550-124 (1) 1550-125	11′ 10-7/8″
259	264	(3) 1550-124 (2) 1550-125	12′ 5-1/4″
271	276	(2) 1550-124 (3) 1550-125	12′ 11-5/8″
283	288	(1) 1550-124 (4) 1550-125	13′ 6″
295	300	(5) 1550-125	14′ 0-3/8″
306	312	(4) 1550-124 (2) 1550-125	14′ 8-1/2″
318	324	(3) 1550-124 (3) 1550-125	15′ 2-7/8″
330	336	(2) 1550-124 (4) 1550-125	15′ 9-1/4″
342	348	(1) 1550-124 (5) 1550-125	16′ 3-5/8″
354	360	(6) 1550-125	16′ 10″

Installation

1460/1560 Five High





Make the Most of Your Mail Room

There are plenty of frustrating things about managing a university mail room, so getting the right mailbox unit shouldn't be one of them. That's why Florence Manufacturing allows you to custom configure your mailbox to fit your specific needs. Get the right number of resident boxes, parcel lockers and outgoing mail compartments to keep your students and faculty happy while still keeping your mail area organized and free of clutter. Available in both front- and rear-loading options, Florence Manufacturing solves all your private distribution mail needs.



Standard Features

- Grouped in combinations of 7, 8, 9, or 10 compartments high and 3, 4, 5, or 6 compartments wide
- 5-pin cylinder cam lock with two keys
- Clear plastic number slots
- Private master lock on 1600 Series
- 5" high door
- 15" deep compartments
- Anodized aluminum finish
- Recess-mounted only
- Snap-on trim kit

Optional Features

- 3-digit combination lock
- 5-pin cylinder spring-latch lock
- 5/8" high engraved numbers with or without black fill numbers
- Engraved tabs for number slots
- Lift-off or hinged rear cover available for the 1700 series
- Eight door size options
- Seven powder coat color options

Note: Florence 1600/1700 horizontal series is for indoor use only, not rated for outdoor use

1600/1700 Doors

10-3/8"

1603/1703 One High

1604/1704

1607/1707 Two High -12-1/8"

1611/1711 Four High

10-3/8"

10-3/8

21"

1600/1700 One High

1602/1702 Two High

-12-1/8"

1605/1705 One High

-12-1/8"

5-3/4"

Note: An integrated mail collection box and/or

parcel locker may be included with your selected

Lock Type Options

Both the 1600 and 1700 horizontal series comes standard with a Hudson K30809 lock. Additional lock options or replacement locks are available. Refer to page 31 for additional details.



HEIGHT DIMENSION

7 UNITS HIGH

Action 5 2-5/4 , Rough Opening 5 5					
Number of tenants			Rough* Wall		
Front Load	Rear Load	Model Number(s) and Quantities	Opening Width		
20	21	(1) 1700-73	1′ 2″		
27	28	(1) 1700-74	1' 6-1/16"		
34	35	(1) 1700-75	1' 10-1/8"		
41	42	(1) 1700-76	2' 2-13/16"		
47	49	(1) 1700-73 (1) 1700-74	2' 7-13/16"		
54	56	(2) 1700-74	2' 11-7/8"		
61	63	(1) 1700-74 (1) 1700-75	3′ 3-15/16″		
68	70	(2) 1700-75	3′ 8″		
75	77	(1) 1700-75 (1) 1700-76	4' 0-1/16"		
82	84	(2) 1700-76	4' 4-1/8"		
88	91	(2) 1700-74 (1) 1700-75	4' 9-3/4"		
102	105	(3) 1700-75	5' 5-7/8"		
116	119	(2) 1700-76 (1) 1700-75	6′ 2″		
129	133	(3) 1700-75 (1) 1700-74	6' 11-11/16"		
136	140	(4) 1700-75	7' 3-3/4"		
143	147	(3) 1700-75 (1) 1700-76	7' 7-13/16"		
150	154	(2) 1700-75 (2) 1700-76	7′ 11-7/8″		
157	161	(3) 1700-76 (1) 1700-75	8' 3-15/16"		
164	168	(4) 1700-76	8′ 8″		
177	182	(4) 1700-75 (1) 1700-76	9' 5-11/16"		
184	189	(3) 1700-75 (2) 1700-76	9' 9-3/4"		
191	196	(3) 1700-76 (2) 1700-75	10′ 1-13/16″		
198	203	(4) 1700-76 (1) 1700-75	10′ 5-7/8″		
205	210	(5) 1700-76	10′ 9-15/16″		

HEIGHT DIMENSION

8 UNITS HIGH

,	Actual 3	3' 8-1/8", Rough* Opening	3′ 8-3/8″
62	64	(2) 1700-84	2' 11-7/8"
70	72	(1) 1700-84 (1) 1700-85	3′ 3-15/16″
78	80	(2) 1700-85	3′ 8″
86	88	(1) 1700-85 (1) 1700-86	4′ 0-1/16″
94	96	(2) 1700-86	4' 4-1/8"
101	104	(2) 1700-84 (1) 1700-85	4' 9-3/4"
109	112	(2) 1700-85 (1) 1700-84	5′ 1-13/16″
117	120	(3) 1700-85	5' 5-7/8"
125	128	(2) 1700-85 (1) 1700-86	5′ 9-15/16″
133	136	(2) 1700-86 (1) 1700-85	6′ 2″
141	144	(3) 1700-86	6′ 6-1/16″
148	152	(3) 1700-85 (1) 1700-84	6′ 11-11/16″
156	160	(4) 1700-85	7' 3-3/4"
172	176	(2) 1700-85 (2) 1700-86	7' 11-7/8"
180	184	(3) 1700-86 (1) 1700-85	8′ 3-15/16″
188	192	(4) 1700-86	8′ 8″
203	208	(4) 1700-85 (1) 1700-86	9′ 5-11/16″
211	216	(3) 1700-85 (2) 1700-86	9' 9-3/4"
219	224	(3) 1700-86 (2) 1700-85	10′ 1-13/16″
227	232	(4) 1700-86 (1) 1700-85	10′ 5-7/8″
242	248	(5) 1700-85 (1) 1700-86	11′ 3-9/16″
250	256	(4) 1700-85 (2) 1700-86	11' 7-5/8"
258	264	(3) 1700-85 (3) 1700-86	11′ 11-11/16″
266	272	(2) 1700-85 (4) 1700-86	12′ 3-3/4″
274	280	(1) 1700-85 (5) 1700-86	12′ <i>7</i> -13/16″
282	288	(6) 1700-86	12′ 11-7/8″

Above dimensions apply to both 1600 and 1700 series.

To figure the actual width, deduct 1/4" from the rough opening dimension. Orders for non-standard mailbax configurations may not be accepted or may result in longer lead times.

at www.florencemailboxes.com or call

HEIGHT DIMENSION

9 UNITS HIGH Actual 4' 1-1/2", Rough* Opening 4' 1-3/4"


Number of tenants			Rough* Wall
Front	Rear	Model Number(s)	Opening
Load	Load	and Quantities	Width
70	72	(2) 1700-94	2' 11-7/8"
79	81	(1) 1700-94 (1) 1700-95	3′ 3-15/16″
88	90	(2) 1700-95	3′ 8″
97	99	(1) 1700-95 (1) 1700-96	4' 0-1/16"
106	108	(2) 1700-96	4' 4-1/8"
114	117	(2) 1700-94 (1) 1700-95	4' 9-3/4"
123	126	(2) 1700-95 (1) 1700-94	5′ 1-13/16″
132	135	(3) 1700-95	5' 5-7/8"
141	144	(2) 1700-95 (1) 1700-96	5' 9-15/16"
150	153	(2) 1700-96 (1) 1700-95	6′ 2″
159	162	(3) 1700-96	6' 6-1/16"
167	171	(3) 1700-95 (1) 1700-94	6′ 11-11/16″
185	189	(3) 1700-95 (1) 1700-96	7' 7-13/16"
194	198	(2) 1700-95 (2) 1700-96	7' 11-7/8"
203	207	(3) 1700-96 (1) 1700-95	8′ 3-15/16″
212	216	(4) 1700-96	8′ 8″
220	225	(5) 1700-95	9' 1-5/8"
229	234	(4) 1700-95 (1) 1700-96	9′ 5-11/16″
238	243	(3) 1700-95 (2) 1700-96	9' 9-3/4"
247	252	(3) 1700-96 (2) 1700-95	10′ 1-13/16″
256	261	(4) 1700-96 (1) 1700-95	10′ 5-7/8″
265	270	(5) 1700-96	10′ 9-15/16″

HEIGHT DIMENSION

10 UNITS HIGH Actual 4' 7", Rough* Opening 4' 7-1/4"

	Acio	ur 4 7 , koogir Opening 4 .	/-1/4
68	70	(1) 1700-103 (1) 1700-104	2' 7-13/16"
78	80	(2) 1700-104	2' 11-7/8"
88	90	(1) 1700-104 (1) 1700-105	3' 3-15/16"
98	100	(2) 1700-105	3′ 8″
108	110	(1) 1700-105 (1) 1700-106	4' 0-1/16"
118	120	(2) 1700-106	4' 4-1/8"
127	130	(2) 1700-104 (1) 1700-105	4' 9-3/4"
137	140	(2) 1700-105 (1) 1700-104	5' 1-13/16"
147	150	(3) 1700-105	5' 5-7/8"
157	160	(2) 1700-105 (1) 1700-106	5' 9-15/16"
167	170	(2) 1700-106 (1) 1700-105	6′ 2″
177	180	(3) 1700-106	6′ 6-1/16″
186	190	(3) 1700-105 (1) 1700-104	6′ 11-11/16″
196	200	(4) 1700-105	7' 3-3/4"
206	210	(3) 1700-105 (1) 1700-106	7' 7-13/16"
216	220	(2) 1700-105 (2) 1700-106	7' 11-7/8"
226	230	(3) 1700-106 (1) 1700-105	8′ 3-15/16″
236	240	(4) 1700-106	8′ 8″
245	250	(5) 1700-105	9' 1-5/8"
255	260	(4) 1700-105 (1) 1700-106	9′ 5-11/16″
265	270	(3) 1700-105 (2) 1700-106	9' 9-3/4"
275	280	(3) 1700-106 (2) 1700-105	10′ 1-13/16″
285	290	(4) 1700-106 (1) 1700-105	10' 5-7/8"
295	300	(5) 1700-106	10' 9-15/16"
304	310	(5) 1700-105 (1) 1700-106	11′ 3-9/16″
314	320	(4) 1700-105 (2) 1700-106	11' 7-5/8"
324	330	(3) 1700-105 (3) 1700-106	11′11-11/16″
334	340	(2) 1700-105 (4) 1700-106	12′ 3-3/4″
344	350	(1) 1700-105 (5) 1700-106	12′ <i>7</i> -13/16″
354	360	(6) 1700-106	12′ 11-7/8″

vertical system. Installation





Reliability Every Step of the Way

Whether sending mail across town or across the country, it deserves protection from the beginning to the end of its journey. Just as resident compartments protect incoming mail, Florence Collection Boxes secure it while awaiting pick up by the USPS to help ensure safe mail right from the start. Florence Vertical Collection Boxes come in a choice of sizes for various installations to fit your individual project needs.

12 Series



Standard Features

- 5/32" extruded aluminum door
- Extruded aluminum frame
- Steel compartment
- Anodized aluminum finish
- Letter slot 3/4" H x 5-3/4" W

Optional Features

- Engraved as specified
- Six powder coat color options
- Semi-recessed or surface-mount option available

Lock Features

Private lock

130 Series



Standard Features

- 5/32" extruded aluminum door
- Extruded aluminum frame
- Steel compartment
- Engraved "LETTERS"
- Anodized aluminum finish
- Letter slot 3/4" H x 10" W with deflector door

Optional Features

- Engraved as specified
- Six powder coat color options
- Semi-recessed or surface-mount

Lock Features

- Prepped for USPS lock Standard
- Private lock available

140 / 150 Series



Standard Features

- 5/32" extruded aluminum door
- Extruded aluminum frame
- Steel compartment
- Engraved "LETTERS"
- Anodized aluminum finish
- Letter slot 3/4" H x 10" W
- Fully-recessed

Optional Features

- Engraved as specified
- Six powder coat color options

Lock Features

- Prepped for USPS lock Standard
- Private lock available

Powder Coat Color Options



Silver Speck PMS 877C

Postal Grey

Designed for integrated use with the Florence horizontal and vertical mailbox product lines, collection and drop boxes are a natural extension of your mailbox system.

For additional product details, contact your local Authorized Florence Dealer or visit us at florencemailboxes.com.

120 Series



Standard Features

- 5/32" extruded aluminum door
- Extruded aluminum frame
- Steel compartment
- Letter slot 3/4" H x 10" W
- Engraved "LETTERS"
- Anodized aluminum finish

Optional Features

- Engraved as specified
- Six powder coat color options
- Semi-recessed or surface-mount option available

Lock Features

- Prepped for USPS lock Standard
- Private lock available

12/120/130/140/150 Dimensions

Vertical collection boxes come in a choice of sizes for various installations and are constructed to be used in conjunction with most Florence vertical mailbox installations.

į	Category No.	USPS Approved	Rough Opening Height	Rough Opening Width	Frame Height	Frame Width	Rough Opening Depth
	12R	No	17-5/8"	7-1/4"	19-1/8"	8-13/16"	6-3/4"
	12SR	No	17-5/8"	7-1/4"	19-1/8"	8-13/16"	4-1/4"
	12SM	No	-	-	19-1/8"	8-13/16"	_
	120R	No	17-5/8"	13-5/8"	19-1/8"	15-1/16"	6-3/4"
	120SR	No	17-5/8"	13-5/8"	19-1/8"	15-1/16"	4-1/4"
	120SM	No	-	-	19-1/8"	15-1/16"	_
	120SMP*	No	*** (-	-	19-1/8"	15-1/16"	6-3/4"
	130R	Yes	22-1/4"	13-5/8"	23-5/8"	15-3/16"	6-3/4"
	130SR	Yes	22-1/4"	13-5/8"	23-5/8"	15-3/16"	4-1/2"
	130SM	Yes	_	_	23-5/8"	15-3/16"	-
-	140/150	No	17-3/8"	14-5/8"	19-7/8"	1 <i>7</i> -1/8″	17"

*120SMP



LD12A Letter Drop



Standard Features

- Spring-hinged front door for door or wall installation
- Extruded aluminum construction
- Rough opening: 5" H x 12-5/8" W
- Frame size:
 - 6-5/16" H x 14-1/16" W x 3/4" D
- Anodized aluminum finish
- Door size: 4" H x 11-3/4" W
- Engraved "U.S. MAIL"

Optional Features

- Engraved as specified
- LD12L wall liner available:
 - 8" standard unless otherwise specified
 - 4" to 12" available in full inch increments only
 - Specify straight or angled
- Can be used with 120SM Collection Box

120SMLDL



LD12 Series Letter Drop with Angled Wall Liner Chute to 120SM Collection Box provides security within a small space. (Also available with a straight chute)

The Value of Mail Collection

Meant for busy mail areas, a Florence Collection Bundle Box is a great way to add value and convenience to your building's mail system. As a large unit, a Collection Bundle Box can receive individual letters as well as bulkier, bundled metered mail. And with its heavy-gauge aluminum construction, even large volumes of mail are kept safe until picked up by the USPS. These units are designed for use alone, with Florence horizontal mailboxes, or can be sized to match the Florence 2600 American Device horizontal series; and are available in both front- and rear-loading options. Visit florencemailboxes.com for more details.



Standard Features

- Front loading (CCF series)
- Recess- (RM) or surface-mounted (SM)
- Master door and hopper door constructed of 1/4" aluminum
- 1-1/8" high engraved letters as shown
- Anodized aluminum finish

Optional Features

- Rear-loading (CCR series)
- Prepared for postal lock on rear panel
- Engraving as specified
- Snap-on trim kit for recess-mounted model
- Six powder coat color options

MODEL NO.	DIMENSIONS
CCF36RM	20"W X 36"H X 17"D
CCF60RM	20"W X 60"H X 17"D
CCF36SM	20"W X 36"H X 17"D
CCF60SM	20"W X 60"H X 17"D
CCR36RM	20"W X 36"H X 17"D
CCR60RM	20"W X 60"H X 17"D
	11 1

Note: Add 1/4" to all dimensions for rough opening when recess mounting

Powder Coat Color Options

Sandstone
PMS 7501C

Dark Bronze
PMS Black 7C

Black
PMS Black 6C

Silver Speck
PMS 877C

Gold
PMS 871C

Postal Grey

CCF60SMSA

Collection Boxes



Standard Features

- Hopper door and master door constructed of 1/4" aluminum
- Master door 12-3/8" H x 15" W; Hopper door 8" H x 15" W; Handle 8-1/2" long
- Engraving standard as shown; characters 1-1/8" H
- Anodized aluminum finish

Optional Features

- Snap-on trim kit
- Engraving as specified
- Mail bag rack available
- Six powder coat color options
- Can be sized to match either Florence horizontal, 2600 American Device or 4C suite series

Lock Features

- Prepped for USPS lock Standard
- Private lock available (front load only)

Book Depositories



CC11RL

Standard Features

- 1/4" thick extruded aluminum construction
- Rough opening: 11-1/4" H x 16-1/2" W
- Frame size 14" H x 19" W
- Hopper door size: 8" H x 15" W x 8-3/4" D
- Anodized aluminum finish
- Engraved "BOOK DEPOSITORY"

Optional Features

- Engraving as specified
- Six powder coat color options

MODEL NO.	ROUGH OPENING HEIGHT	FACE PLATE HEIGHT	ROUGH OPENING WIDTH	FACE PLATE WIDTH
CC51FL	25-5/8"	28"	18-1/4"	21"
CC52FL	25-5/8"	28"	35-1/4"	38"
CC53FL	25-5/8"	28"	52-1/4"	55"
CC51RL	25-1/4"	28"	18-1/4"	21"
CC52RL	25-1/4"	28"	35-1/4"	38"
CC53RL	25-1/4"	28"	52-1/4"	55"
CC61FL	25-5/8"	33-3/8"	18-1/4"	21"
CC62FL	25-5/8"	33-3/8"	35-1/4"	38"
CC63FL	25-5/8"	33-3/8"	52-1/4"	55"
CC61RL	30-5/8"	33-3/8"	18-1/4"	21"
CC62RL	30-5/8"	33-3/8"	35-1/4"	38"
CC63RL	30-5/8"	33-3/8"	52-1/4"	55"
CC71FL	25-5/8"	38-3/4"	18-1/4"	21"
CC72FL	25-5/8"	38-3/4"	35-1/4"	38"
CC73FL	25-5/8"	38-3/4"	52-1/4"	55"
CC71RL	36"	38-3/4"	18-1/4"	21"
CC72RL	36"	38-3/4"	35-1/4"	38"
CC73RL	36"	38-3/4"	52-1/4"	55"





Opportunity May Knock Only Once... But We Let It Chime, Year After Year

For over a hundred years, property owners have relied on Auth-Chimes for high-quality, maintenance-free door enhancements. Our time proven design, quality materials and acoustically buffered strike pads work harmoniously to create a rich and distinctive two-note musical tone that is always pleasant to the ear. Our models allow your residents to see out, while preventing unwanted visitors from seeing in. And, because our chimes are not dependent upon electricity, you never have to worry about power failures, worn batteries, or frayed wires. Florence Manufacturing continues this proud tradition of exceptional design, unmatched durability and affordable elegance; so don't open the door to just anyone, let us find the right chime for your specific application.




Did you know?

All viewing lenses and mirrors feature secure, one-way visibility with wide angle viewing designed to fit doors up to 4-3/4" thick. UL fire rated options are also available and are designed to fit doors up to 2-1/2" thick.

Installation

A self-contained mechanical design allows all of our chimes to be easily installed with just a screwdriver and drill. Each unit comes complete with fastening hardware, positioning templates and easy-to-follow instructions. There are no wires, transformers, buzzer connections or electrical hook-ups to worry about, so forget the electrician. We are so confident of our product's performance, we offer a one-year warranty on all parts that cease to function due to normal wear and tear.



Chime Color Options

Anodized
Gold

Anodized
Silver

Bronze

Gold
Powder Coat

Silver
Powder Coat

Gold
Chrome

Model 684



Model 686



Features

- 5" H x 2" W
- One-way viewing mirror designed to fit doors up to 4-3/4" thick
- Aluminum or bronze chime faceplate available
- Apartment identification plate
- Name plate

Aluminum Finishes

684101-01 - Anodized Silver 684102-01 - Anodized Gold

Bronze Finishes

684104-01 - Bronze



Features

- 5" H x 2" W
- One-way wide-angle viewing lens designed to fit doors up to 4-3/4" thick
- Aluminum or bronze chime faceplate available
- Engraving optional
- (UL) Fire-rated viewers optional

Aluminum Finishes

685101-01 - Anodized Silver 685102-01 - Anodized Gold

Bronze Finishes

685104-01 - Bronze



- 5" H x 2" W
- One-way wide-angle viewing lens designed to fit doors up to 4-3/4" thick
- Aluminum or bronze chime faceplate available
- Apartment identification plate
- Name plate
- (UL) Fire-rated viewers optional

Aluminum Finishes

686101-01 - Anodized Silver

686102-01 - Anodized Gold

686105-01 - Silver Chrome

686106-01 - Gold Chrome

Bronze Finishes

686104-01 - Bronze

Model 687

Model 689

Model 690



Features

- 2-1/4" H x 2" W
- Name plate

Aluminum Finishes

687101-01 - Anodized Silver 687102-01 - Anodized Gold



Features

- 6-5/8" H x 3" W
- Modern, deep recessed, deluxe one-way viewing mirror designed to fit doors up to 4-3/4" thick
- Engraving optional
- Apartment identification plate
- Name plate
- Heavy, cast metal with powder coat finish

Aluminum Finishes

689105-01 - Silver Powder Coat 689106-01 - Gold Powder Coat



Features

- Oval shaped
- Wide-angle (UL) fire-rated viewer designed to fit doors up to 2-1/2" thick
- Name plate

Aluminum Finishes

690-1 - Anodized Gold





Organization is Key

Between key rings and mysterious labels, keeping track of keys for numerous resident units can be a nightmare. But a Florence Key Cabinet is just the tool to help property managers get the upper hand and get rid of all those key rings. Each cabinet includes numbered tags that hang in corresponding slots so you can find any key and know which keys are loaned out. The locking cabinets are available in sizes to store anywhere from 30 to 715 keys, giving you access to all your unit keys without lugging around the whole collection. For organization and security, a Florence Key Cabinet is the property manager's best friend.



201-9110-03 Key Cabinets available in industrial sand finish only

Standard Features

- Made of welded heavy-gauge steel with piano-hinged door
- Includes standard disc tumbler key lock with two keys
- Vulcanized fiber numbered tags
- Wide angled slots hold keys securely and provide for neat organization
- Industrial sand finish

CATALOG NO.	KEY CAPACITY	DIMENSIONS
201903003	30	12-1/8" H x 8" W x 2-5/8" D
201906003	60	12-1/8" H x 10-5/8" W x 3" D
201911003	110	17-1/8" H x 14" W x 3-1/8" D
201916003	160	20-1/8" H x 16-1/2" W x 4-7/8" D
201924003	240	20-1/8" H x 16-1/2" W x 4-7/8" D
201932003	320	20-1/8" H x 16-1/2" W x 4-7/8" D
201950003	500	31-1/8" H x 16-1/2" W x 7" D
201971503	715	31-1/8" H x 16-1/2" W x 7" D

Model KK



Standard Features

- Extruded aluminum construction
- Anodized aluminum finish
- Exterior dimensions: 6-3/4" H x 6-1/4" W x 2-3/8" D
- Interior dimensions: 4-5/8" H x 4-1/16" W x 2" D
- Rough opening: 5-1/8" H x 4-3/8" W x 2-1/4" D

MODEL NO.	DESCRIPTION
KK	Loose key type
KKE	Electric switch type
KKR	23" long retractable reel type
KKP	Loose key with private lock
SMKK	Surface mounted collar

Optional Features

- Surface mounting collar
- Six powder coat color options

Powder Coat

Sandstone	Silver Speck
PMS 7501C	PMS 877C
Dark Bronze	Gold
PMS Black 7C	PMS 871C
Black	Postal Grey
PMS Black 6C	PMS 413C

Color Options

PMS 7501C	PMS 877C
Dark Bronze	Gold
PMS Black 7C	PMS 871C
Black	Postal Grey
PMS Black 6C	PMS 413C

Model K26

The K26 Series key keeper allows postal employees to enter automatically locking entrance doors to distribute mail in accordance with USPS regulations. This model is manufactured to accept postal locks installed by local postal officials.



Standard Features

- Heavy-gauge brushed stainless steel
- Formed and painted steel box
- Strong stainless steel piano-type hinge
- Exterior dimensions: 3-1/4" H x 6" W x 1-15/16" D
- Interior dimensions: 2-1/8" H x 4-5/8" W x 1-5/8" D
- Rough opening: 2-1/2" H x 5" W x 1-3/4" D

MODEL NO.	DESCRIPTION
K26	Loose key type prepared for USPS lock
K26R	20" long retractable chain type prepared for master lock
K26P	Push button electrical switch type prepared for master lock
K26C	Loose key type with five-pin cam lock
K26R-C	20" long retractable chain type with five-pin cam lock
K26P-C	Push button electrical switch type with five-pin cam lock

Replacement Keys



The loss of a mailbox key can be a frustrating experience. For emergency key situations, contact a local locksmith or hardware store. If neither of those are able to assist you, Florence Manufacturing maintains an inventory of key blanks for all Florence mailboxes as well as cut keys for select products. (Make sure to have the manufacturer and number from the key handy for reference sake.)

Orders for replacement keys may be placed through a local locksmith or your local Authorized Florence Dealer. There are instances in which security constraints prevent the cutting of new mailbox keys, in which case we offer replacement locks available through an Authorized Florence Dealer.

superior customer service



Florence Manufacturing is proud to provide a complete support team to serve all your needs. Not only are customer service representatives ready to assist you in locating an Authorized Dealer or answering your product questions, but a full team of engineering, design, marketing and sales professionals are available too. This dedicated team can help ensure your project goes as planned each step of the way. Simply call 800-275-1747 or visit florencemailboxes.com for full details.

stock items / parts

Using contemporary manufacturing processes and equipment in our fully automated 192,000 sq. ft. facility, our efficient, vertically integrated production and quality control standards enable Florence Manufacturing to maintain inventory of our most popular products. In many instances, these items can ship within 48 hours of ordering. We also offer a variety of replacement parts for each of our product lines. Simply visit our website and click "Parts" to view a complete listing by product.

limited warranty

Florence Manufacturing Company provides a five-year Warranty, from the date of shipment, covering defects in material and workmanship of all equipment; and guarantees factory replacement and/or repair of all defective items. This Warranty does not cover replacement of batteries or any other comsumable items, or damage due to improper installation, mishandling, misuse, or acts of nature. We make no other warranties of any kind, either expressed or implied.

returns

All product shipments are adequately packaged, but should be thoroughly inspected upon receipt, and *prior to acceptance*, for potential damage in transit. Returned goods will not be accepted without a returned goods authorization (RGA) number from Florence Manufacturing. Contact your local Authorized Florence Dealer to obtain your RGA number and return address. Stock products may be returned within 90 days of original invoice and are subject to a 30% restocking fee. Custom orders cannot be returned or exchanged.



Florence Manufacturing is proud to have set the design standard for all USPS approved CBUs manufactured in the United States.

care and cleaning


The surface of all Florence products may be cleaned with any mild detergent or properly biodegradable water-based cleaner (such as Simple Green™) and a soft cloth. The use of petroleum-based solvents, ammonia, harsh abrasive cleaners, or scrubbing sponges is not recommended, as in some cases it may damage the product. Cleaning with a damp soft cloth is appropriate. Touch-up paint may be available from an Authorized Florence Dealer for those products which utilize powder coating finish.

materials

product descriptions and specifications contained herein were in affect at the time the catalog received final approved for printing. As Florence Manufacturing Company continually strives for efficiencies to pass along to our customers, we reserve the right to change specifications and/or designs without notice and without incurring any liability. Where appropriate, replacement items will be maintained during potential transition.

architectural resources

Get Spec Documents

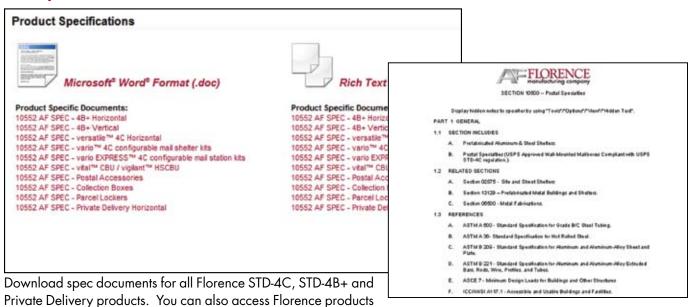

Stay Current With Changing Guidelines

online through Sweets, ArCat and CADdetails.

U.S. Postal Service STD-4C Specification Highlights

Effective October 5, 2006, all new designs approved for NEW CONSTRUCTION AND MAJOR RENOVATION require U.S. Postal Service STD-4C compliant mailbox systems. The new USPS 4C Standard includes the following specifications:

- . A new compartment form factor minimum size requirement of 12'w × 15'd × 3'h.
- Eliminates the vertical form factor (5'w × 6'd × 15'h) design.
- Introduces a parcel locker requirement based on a 1:10 parcel locker to customer compartment ratio.
- · Strengthens security requirements for the entire receptacle.
- Standardizes and improves tenant compartment lock design
- Adds testing requirements to verify acceptability for either indoor or outdoor use.
- · Introduces quality management systems provisions.
- Enhances design flexibility for concept, ergonomics, and materials.
- Meets Americans with Disabilities Act (ADA) standards.

Auth-Florence versatile™ 4C mailbox suites are designed to meet or exceed the USPS specifications out above and in the "Federal Register/Vol. 69, No. 171/September 3, 2004/Rules and Regulations POSTAL S 39 CFR Part 111, Standards Governing the Design of Wall-Mounted Centralized Mail Receptacles.

IMPORTANT NOTE TO ARCHITECTS, SPECIFIERS, DESIGN LAYOUT PROFESSIONALS AND INSTALLERS -- Installation/Layout Instructions Specified in USPS Standard 4C -- pages 53821-53832 above referenced USPS 4C Standard "Notes" sections specify:

All 4C Units shall be designed such that they are in compliance with the following installation

- 1. At least one customer compartment shall be positioned less than 48 inches from the finished floor.
- No parcel locker compartment (interior bottom shelf) shall be positioned less than 15 inches from the finished floor.
- 3. No patron (tenant) lock shall be located more than 67 inches above the finished floor.
- 4. No customer compartment (interior bottom shelf) shall be positioned less than 28 inches from the finished


Did you know?

Manufacturing Florence has been included in master specs for decades. Other names we may be listed under include: Auth, Auth-Florence, Auth-Electric, American Device, Cutler, Florence, and Florence Manufacturing.

Accessibility Guide

Florence versatile**	Accessibi	ility and Regulator	ry Standards Comp	liance
4C mailbox suites (Unit Heights)	US Postal Service ¹ STD-4C Installation	U.S. DOJ? ADA Standards	ICC/ANSI? A117.1 2003	IBC 2006 (Ref: ICC/ANSI) ²
Suite A - 39*	YES	NO	NO	MO
Suite 8 - 18"	YES	YES	YES	YES
Suite C - \$1-1/4"	YES	NO	NO	MO
Suite D - 21-1/2*	YES	YES	YES	YES
Suite E - 28-1/2*	YES	YES	MO	NO
Suite F - 56-1/2*	YES	NO	MO	MO
Suite G - 54-3/4*	YES	NO	MO	MO
Suite H - 40-3/4"	YES	NO	NO	NO
Suite I - 37-1/4"	YES	YES	YES	YES

Review important specification and guideline documents for mandatory STD-4C compliance or accessibility issues.





catalog index


4C, versatile™ mailbox collars - USPS Approved, NEW	11
4C. versatile™ mailbox suites - USPS Approved	
Configurable, NEW	11
Front Load	19
Rear Load, NEW	11
About Us	
Accessibility	15
American Device, 2600 Series Horizontal Mailbox - USPS Approved28	-31
Architectural Specifications	49
Authorized Florence Dealer Locator	
Awards, USPS	21
Bike Racks, Florence Site Furnishings, NEW	21
Book Depository	
Care and Cleaning	
Chimes	
Cluster Box Units	0
vital™ 1570 CBU series - USPS Approved	6-7
vigilant™ 1565 High Security CBU series - USPS Approved	
vogue™ 1570 CBU Accessories - USPS Approved, NEW	7
Collars	
4C, versatile™ mailbox, NEW	11
1250 Vertical Series - USPS Approved32	-33
Collection Boxes (see also drop boxes)	
1250 Vertical Series - USPS Approved	
1400/1500 Horizontal Series - USPS Approved	25
2600 American Device Integral Unit - USPS Approved	29
CC Series	
Colors 6, 8, 10, 16, 20, 22, 23, 24, 28, 32, 35, 36, 38, 40, 42, 44,	,47
Configurator	51
Copyright	
Customer Service	
Dealers, Authorized Florence	5 I
Directories 1250 Vertical Series - USPS Approved	22
1400/1500 Horizontal Series - USPS Approved	
2600 American Device Series - USPS Approved	20
Door Options	20
Drop Boxes (see also collection boxes)	37
12/120 Series	40
130 Series - USPS Approved	40
140/150 Series	
LD12 Series Letter	
Engraving	
Florence Site Furnishings, NEW	
Gibraltar Industries	30
High Security Cluster Box Unit, vigilant™ 1565 series - USPS Approved	8-9
Horizontal Mailbox	
1400/1500 Series - USPS Approved24	-26
2600 American Device Series - USPS Approved	-31
1450/1550 Series / 1600/1700 Series - Private Delivery36	
ID Options	
Installation, Authorized Florence Dealer	51
Installation Instructions	
1250 Vertical Series - USPS Approved	
1400/1500 Horizontal Series - USPS Approved	
1450/1550 Horizontal Series - Private Delivery	
1600/1700 Vertical Series - Private Delivery	39
4C Mailbox Suites - USPS Approved	
Chimes	23
ISO Certified	
Key Cabinets	
Key Keepers	
Keys, Replacement	
Letter Drop, LD12 Series	
Lights	
LED, vario™ (solar and AC), NEW	20
Solar, sentinel [™] site lite, NEW	21
Locator, Authorized Florence Dealer	49
Locks	39
Lock Options, Horizontal	31
Lock Suppliers	31
Mail Station Accessories, vicinity™, NEW	21
Mail Shelter, vario™ (pre-engineered), NEW16	-20
Mail Station, vario EXPRESS™ (pre-engineered), NEW16	
Materials	
MB 2000, Single Family Residential - USPS Approved	
MUCK - Multi-Unit Connector Kit, 4C versatile™ mailbox suites	1.1

New Products	5
4C Collar - USPS Approved	. 11
4C Configurable - USPS Approved	. 11
4C Rear-Load - USPS Approved	
4C Suite H/4C Suite I - USPS Approved	 . 1 1
vicinity TM , mail station accessories	21
sentinel TM solar site lite	
Florence Site Furnishings	
vario™, pre-engineered mail shelter kits	-20
vario EXPRESSTM, pre-engineered mail station kits	o-20
vogue™, 1570 CBU accessories - USPS Approved	/
Online Resources	. 51
Outdoor Parcel Locker, valiant™ - USPS Approved	
Planters, Florence Site Furnishings, NEW	. 21
Postal Accessories	
Key Cabinet	. 46
Key Keepers	
Postal Regulations, USPS	
Private Delivery	
1450/1550 Horizontal Series	.37
1600/1700 Horizontal Series	
Quotations, Authorized Florence Dealer	
Rear-Load	
4C Rear-load, NEW	
1450/1550 Series - Private Delivery	
1500 Horizontal Series - USPS Approved	. 24
1600/1700 Vertical Series - Private Delivery	. 38
2600 American Device Horizontal Series - ÚSPS Approved	. 28
CCF60SM Collection Box	. 42
Receptacles, (Litter and Ash) Florence Site Furnishings, NEW	. 21
Recycling	2
Replacement Keys	. 47
Replacement Mailboxes	
1250 Vertical Series - USPS Approved32	-34
1400/1500 Horizontal Series - USPS Approved24	1-26
2600 American Device Horizontal Series - USPS Approved28	3-31
Replacement Parts	
Returns	
Security Upgrade	. 40
1250 Vertical Series - USPS Approved	24
1230 vertical series - OSFS Approved	. 34
1400/1500 Horizontal Series - USPS Approved	. 26
1400/1500 Horizontal Series - USPS Approved	. 26
1400/1500 Horizontal Series - USPS Approved	. 26 . 23
1400/1500 Horizontal Series - USPS Approved	. 26 . 23 . 21
1400/1500 Horizontal Series - USPS Approved	. 26 . 23 . 21 3-19
1400/1500 Horizontal Series - USPS Approved	. 26 . 23 , 21 3-19 , 26
1400/1500 Horizontal Series - USPS Approved	. 26 . 23 . 21 3-19 . 26 . 32
1400/1500 Horizontal Series - USPS Approved	. 26 . 23 . 21 3-19 . 26 . 32
1400/1500 Horizontal Series - USPS Approved	. 26 . 23 . 21 3-19 . 26 . 32 . 48
1400/1500 Horizontal Series - USPS Approved	. 26 . 23 . 21 3-19 . 26 . 32 . 48
1400/1500 Horizontal Series - USPS Approved	. 26 . 23 . 21 3-19 . 26 . 32 . 48
1400/1500 Horizontal Series - USPS Approved	. 26 . 23 . 21 . 3-19 . 26 . 32 . 48 . 40
1400/1500 Horizontal Series - USPS Approved	. 26 . 23 . 21 3-19 . 26 . 32 . 48 2-34 . 40 1-26
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved. Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 . 32 . 32 . 48 . 40 . 40 . 31
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved. Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 . 3-19 . 26 . 32 . 48 . 40 4-26 3-31 . 23
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved. Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 , 21 3-19 , 26 , 32 , 48 . 40 4-26 3-31 . 23 . 22
1400/1500 Horizontal Series - USPS Approved Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 2-34 . 40 1-26 3-31 . 23 . 22 . 15
1400/1500 Horizontal Series - USPS Approved Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 . 40 1-26 3-31 . 22 . 15 . 11
1400/1500 Horizontal Series - USPS Approved Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 . 40 4-26 3-31 . 23 . 22 . 15 . 11 . 8-9
1400/1500 Horizontal Series - USPS Approved Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 . 40 4-26 3-31 . 23 . 22 . 15 . 11 . 8-9
1400/1500 Horizontal Series - USPS Approved Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 2-34 . 40 1-26 3-31 . 23 22 15 11 8-9
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 . 3-19 . 26 . 32 . 48 . 40 . 426 . 3-31 . 23 . 15 . 11 . 8-9 . 6-7
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 . 40 4-26 3-31 . 23 22 . 15
1400/1500 Horizontal Series - USPS Approved Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 . 3-19 . 26 . 32 . 48 . 40 . 42 . 40 . 42 . 15
1400/1500 Horizontal Series - USPS Approved Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 . 3-19 . 26 . 32 . 48 . 40 . 40 . 40 . 40 . 3-31 . 23 . 22 . 15
1400/1500 Horizontal Series - USPS Approved Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 266 . 23 . 213-19 . 266 . 322 . 48 . 404-26 . 3-31 . 23 22 . 15
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26. 23 . 213-19 . 26. 32 . 48 . 404-26 . 3-31 . 23 25
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 . 40 1-26 3-31 . 23
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 . 40 1-26 3-31 . 23
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved. Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 . 3-19 . 26 . 32 . 48 . 2-34 . 40 . 40 . 3-31 22
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 . 42 6-3 . 41 . 42 6-3
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 . 3-19 . 26 . 32 . 48 . 40 . 426 . 3-31 . 23 22
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 . 3-19 . 26 . 32 . 48 . 40 . 426 . 3-31 . 23 22
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved. Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 . 40 . 42 6-3 . 11 . 8-9
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved. Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 . 40 . 42 6-3 . 11 . 8-9
1400/1500 Horizontal Series - USPS Approved Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 . 3-19 . 26 . 32 . 40 . 42 . 40 . 42 . 31 . 23 . 22 . 15
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved. Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 . 3-19 . 26 . 32 . 40 . 42 . 40 . 42 . 31 . 23 . 22 . 15
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 . 40 . 426 3-31 . 23 . 22 . 15
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 21 3-19 . 26 . 32 . 48 . 40 . 426 3-31 . 23 . 22 . 15
1400/1500 Horizontal Series - USPS Approved. Single Family Residential Mailbox, MB 2000 - USPS Approved Solar Lights sentinel™ solar site lite, NEW	. 26 . 23 . 219 . 26 . 322 . 440 . 426 . 331 . 23 . 215


superior online resources



Downloadable Tools



Design a Mailbox



Find a Dealer



Get a Quote

Florence Manufacturing has developed extensive online resources to assist with all your projects. Whether you are an architect looking for a three-part specification, a builder needing product dimensions and rough opening calculations, property manager looking for the latest in postal regulations, it is all at florencemailboxes.com. Plus, our nationwide dealer locator not only assists you in finding your local dealer, but will show you installations they have done within the area. Using our one-ofa-kind mailbox configurator gives you superior resources right at your finger tips.

quotations and installation

A local Authorized Florence Dealer is standing by to provide an individual product or complete project quote - as well as product specification, installation and/or any necessary technical documents you may require. To quickly submit a quote request, visit florencemailboxes.com, add your desired selections to your shopping cart and click QUOTE THIS ITEM. Our Authorized Dealers are also ready to assist with your specific product installation needs. Most products are shipped pre-assembled and ready for final installation; however, further assistance is available from many local Authorized Dealers. It is always a good idea to consult with local postal authorities for local approval and current installation requirements to complete all USPS approved product installations.



copyright

Florence Manufacturing has made every effort possible to ensure the accuracy of all information contained within this publication. We reserve the right to correct inadvertent or typographical errors, inaccuracies or omissions - should they happen to occur - and to change or update information at any time without prior notice. All publication elements, including but not limited to, design, graphics, text, trademarks, art, and photographs, as well as the selection and arrangement thereof, are Copyright © 2008-2009 Florence Corporation, all rights reserved. This catalog is intended for distribution by Florence Manufacturing and its Authorized Dealers for the sole purpose of purchasing products contained herein. Any other use of this publication, including modification or re-publication of any portion of the publication, without the prior written consent of Florence Manufacturing, is strictly prohibited.

COPYRIGHT © 2008-2009 FLORENCE CORPORATION, ALL RIGHTS RESERVED, CATALOG SUBJECT TO CHANGE WITHOUT NOTICE, PRINTED IN THE USA.



Find an Authorized Florence Dealer online at www.florencemailboxes.com or call 800-275-1747