

# French Door Refrigerators

EW23BC70I S, EW23BC70I W, EW23BC70I B

Featuring Wave-Touch™ Electronic Controls



### Perfect Temp Drawer™

Offers flexibility in temperature from 28° to 42° F, 9 preset selections including white / sparkling wine, cheese, fish/shellfish, marinade and thaw plus three “My Favorites” that are customizable. Keeps virtually anything at the ideal temperature for storing or serving, so it's perfect for entertaining.



### Perfect Organizational System

Our tri-level freezer organization system features three Luxury-Glide™ baskets with removable/ adjustable dividers and two removable baskets, so you can keep food organized and easily at hand.



### Twice the Ice

You get filtered, restaurant-quality ice featuring a new drink-friendly shape, twice the ice as any refrigerator ice maker<sup>1</sup> — up to 9 pounds in 24 hours — Perfect Ice™ with the touch of a button.



### PureAdvantage® Filtration Systems

Our filtration system keeps clean, filtered air circulated throughout to prevent odor transfer and keeps fresh, clean water and ice at your fingertips.

Combination Replacement Filters Kit – PN# EAFWF01

## 23 CU. FT. COUNTER-DEPTH FRENCH DOOR REFRIGERATORS

### Capacities

Total Capacity	22.6 Cu. Ft.
Fresh Food Volume	15.7 Cu. Ft.
Freezer Volume	6.9 Cu. Ft.
Total Shelf Area	26.9 Sq. Ft.
Fresh Food Shelf Area	19.2 Sq. Ft.
Freezer Shelf Area	7.7 Sq. Ft.

### Exterior

Signature Soft-Arc Doors and Handle Design	Yes
Wave-Touch™ Electronic Controls	Yes
Door Hinge Covers	Yes
Ice/Water Dispenser	Yes
Perfect Set™ Temperature Control System and Display	Yes
Crushed/Cubes/Water	Yes
Perfect Ice™	Yes
Air and Water Filter Indicator/Reset	Yes
Ice Maker On/Off	Yes
Fast Freeze™	Yes
Lock	Yes
Dispenser Light Control	Yes

### Fresh Food Conveniences

PureAdvantage® Water & Ice / Air Filtration	Yes
Water Filter Location	Bottom Left
Temp Alarm System / Door Ajar Alarm / Power Failure Alarm	Yes
Luxury-Design™ Glass Shelves	3 Half Width 1 Quarter Width
Luxury-Glide™ Humidity-Controlled Left Crisper	Yes
Luxury-Glide™ Humidity-Controlled Right Crisper	Yes
Cool Zone™ Drawer	Yes
Perfect Temp Drawer™	Yes
Wine Rack	Yes
Clear Gallon Adjustable Door Bins	1
Clear 1/2-Gallon Adjustable Door Bins	1
Clear 2-Liter/1/2-Gallon Removable Door Bins	2
Locking Clear Utility Bin	Yes
Tilt-Out Can Racks	2
Luxury-Design™ Ramp-Up Multilevel Lighting – LED	Yes
Automatic Ice Maker	Yes

### Freezer Conveniences

Self-Closing Drawer	Yes
Sliding Full-Width Freezer Baskets	3 Luxury-Glide™ (2 with Dividers)
Plastic Basket Tray	1
Tilt-Out Wire Door Racks	1
Luxury-Design™ Ramp-Up Multilevel Lighting – LED	Yes

### Additional Features

Sabbath Mode (Star-K® Certified)	Yes
A.D.A. Compliant*	Yes

### Specifications


Color –	
Stainless Steel	S
White	W
Black	B
Overall Exterior Dimensions –	
Height (with Hinges and 3/8" Rollers)	69-1/2"
Width	35-5/8"
Depth (to Center of Arc)	28-3/16"
(with 90° Door Open)	42-9/16"
(with Drawer Fully Extended)	45-7/8"
Power Supply Connection Location	Right Bottom Rear
Water Inlet Location	Left Bottom Rear
Voltage Rating	120V/60Hz/15 or 20A
Connected Load (kW Rating) @ 120 Volts ‡	1.02
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	345 Lbs.

\*When properly installed, meets the appliance standards in the American with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004.

‡An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at [electroluxappliances.com](http://electroluxappliances.com). Specifications subject to change.

<sup>1</sup>Under normal conditions – 0°F freezer, 37°F fresh food and based on bottom freezer models with exterior ice and water and a suggested MSRP greater than \$2700.

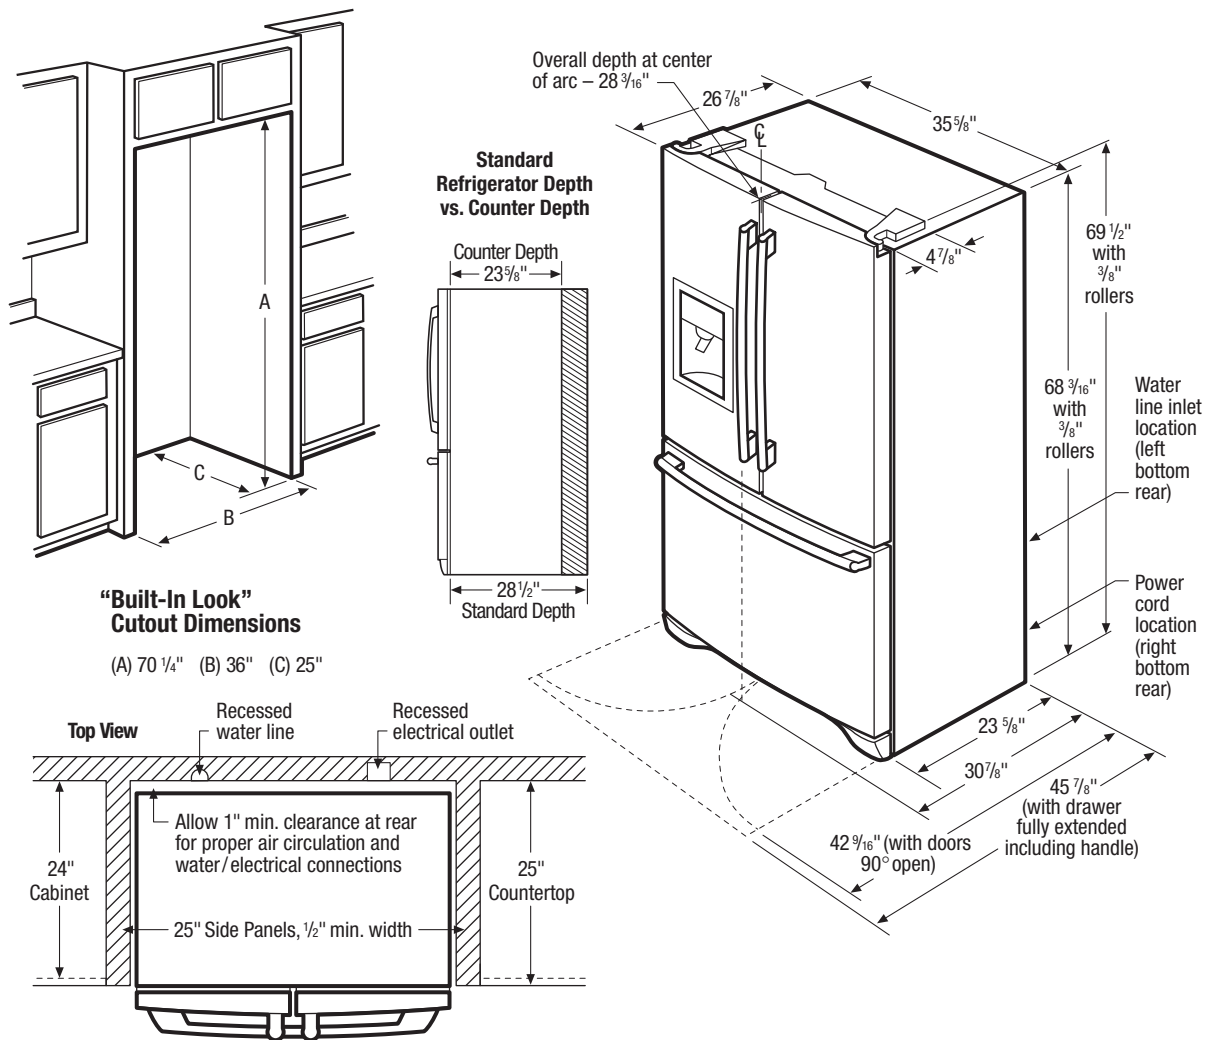

## Counter-Depth French Door Refrigerator Specifications

- Product Weight – 340 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating – 120V/60Hz/ 15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.02kW
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and/or national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (*Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.*)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.

- For proper ventilation, front grille MUST remain unobstructed.
- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure – Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

## “Built-In Look” Specifications

- Minimum opening of 70-1/4" H x 36" W x 25" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

**Note:** For planning purposes only. Refer to Product Installation Guide on the web at [electroluxappliances.com](http://electroluxappliances.com) for detailed instructions.