

# Counter-Depth Refrigerator

EI23CS55G S, EI23CS55G W, EI23CS55G B




### Luxury-Design™ Formed-Glass Shelving

Luxury-Design™ shelving system features Luxury-Glide™ slide-out, formed-glass shelves that are as beautiful as they are functional. These shelves are the only full-sized, refrigerator-depth shelves in a counter-depth refrigerator. Fully extendable glides offer convenience and ease of use.



### Luxury-Design™ Lighting

Luxury-Design™ Lighting features tri-level, ultrawhite, shadowless interior lighting — premium ramp-up lighting that gently increases from soft to full intensity.



### PureAdvantage™ Filtration Systems

PureAdvantage™ Ice, Water and Air filtration systems — total filtration for your refrigerator. Convenient access to the top shelf allows filters to be changed easily.



### Luxury-Glide™ Crispers

Drawers smoothly glide out and keep produce fresh with adjustable humidity control and minimal temperature variation.

## 23 CU. FT. COUNTER-DEPTH REFRIGERATORS

ENERGY STAR®	Yes
Sabbath Mode (Star-K® Certified)	Yes

Capacities	
Total Capacity	22.5 Cu. Ft.
Fresh Food Volume	14.01 Cu. Ft.
Freezer Volume	8.53 Cu. Ft.
Total Shelf Area	21.9 Sq. Ft.
Fresh Food Shelf Area	15.8 Sq. Ft.
Freezer Shelf Area	6.1 Sq. Ft.

Exterior	
Signature Soft-Arc Door and Handle Design	Yes
IQ-Touch™ Electronic Controls	Yes
Door Hinge Covers	Yes
Ice/Water Dispenser	Yes
Perfect Set™ Temperature Control System and Display	Yes
Crushed/Cubes/Water	Yes
Air and Water Filter Indicator/Reset	Yes
Fast Ice™	Yes
Fast Freeze™	Yes
Lock	Yes
Dispenser Light Control	Yes

Fresh Food Conveniences	
PureAdvantage™ Water Filter	Yes
Water Filter Location	Front
PureAdvantage™ Air Filter	Yes
Temp Alarm System	Yes
Door Ajar Alarm	Yes
Power Failure Alarm	Yes
Luxury-Design™ Full-Extension Glass Shelves	3
Luxury-Glide™ Dual Humidity-Controlled Upper Crisper	Yes
Luxury-Glide™ Humidity-Controlled Lower Glass Crisper	Yes
Chill Zone™ Drawer	Yes
Clear Condiment Bottle Door Storage	Yes
Clear 1-Gallon Removable Door Bins	1
Clear 2-Liter Adjustable Door Bins	2
Locking Clear Utility Bin	Yes
Tall Bottle Retainers	1
Clear In-Door Can Rack	Yes
Luxury-Design™ Ramp-Up Multilevel Lighting	Yes

Freezer Conveniences	
Automatic Ice Maker with Ice Server	Yes
Glass Shelves	2
Full Freezer Baskets	2 (1 Luxury-Glide™)
Luxury-Glide™ Half Freezer Baskets	1
Clear Fixed Door Bins	1
Tilt-Out Wire Door Racks	3
Ice Cream Shelf	Yes
Pizza Shelf	Yes
Luxury-Design™ Ramp-Up Multilevel Lighting	Yes

Specifications	
Overall Exterior Dimensions –	
Height (with Hinges and 3/8" Rollers)	69-1/2"
Width	35-5/8"
Depth (to Center of Arc)	28-3/16"
(with 90° Door Open)	45"
Power Supply Connection Location	Right Bottom Rear
Water Inlet Location	Left Bottom Rear
Voltage Rating	120V/60Hz/15 or 20A
Connected Load (kW Rating) @ 120 Volts‡	1.02
Minimum Circuit Required (Amps)	15
Product Weight	300 Lbs.
Shipping Weight (Approx.)	310 Lbs.


‡An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at [electroluxappliances.com](http://electroluxappliances.com). Specifications subject to change.



# Counter-Depth Refrigerators

EI23CS55G S, EI23CS55G W, EI23CS55G B

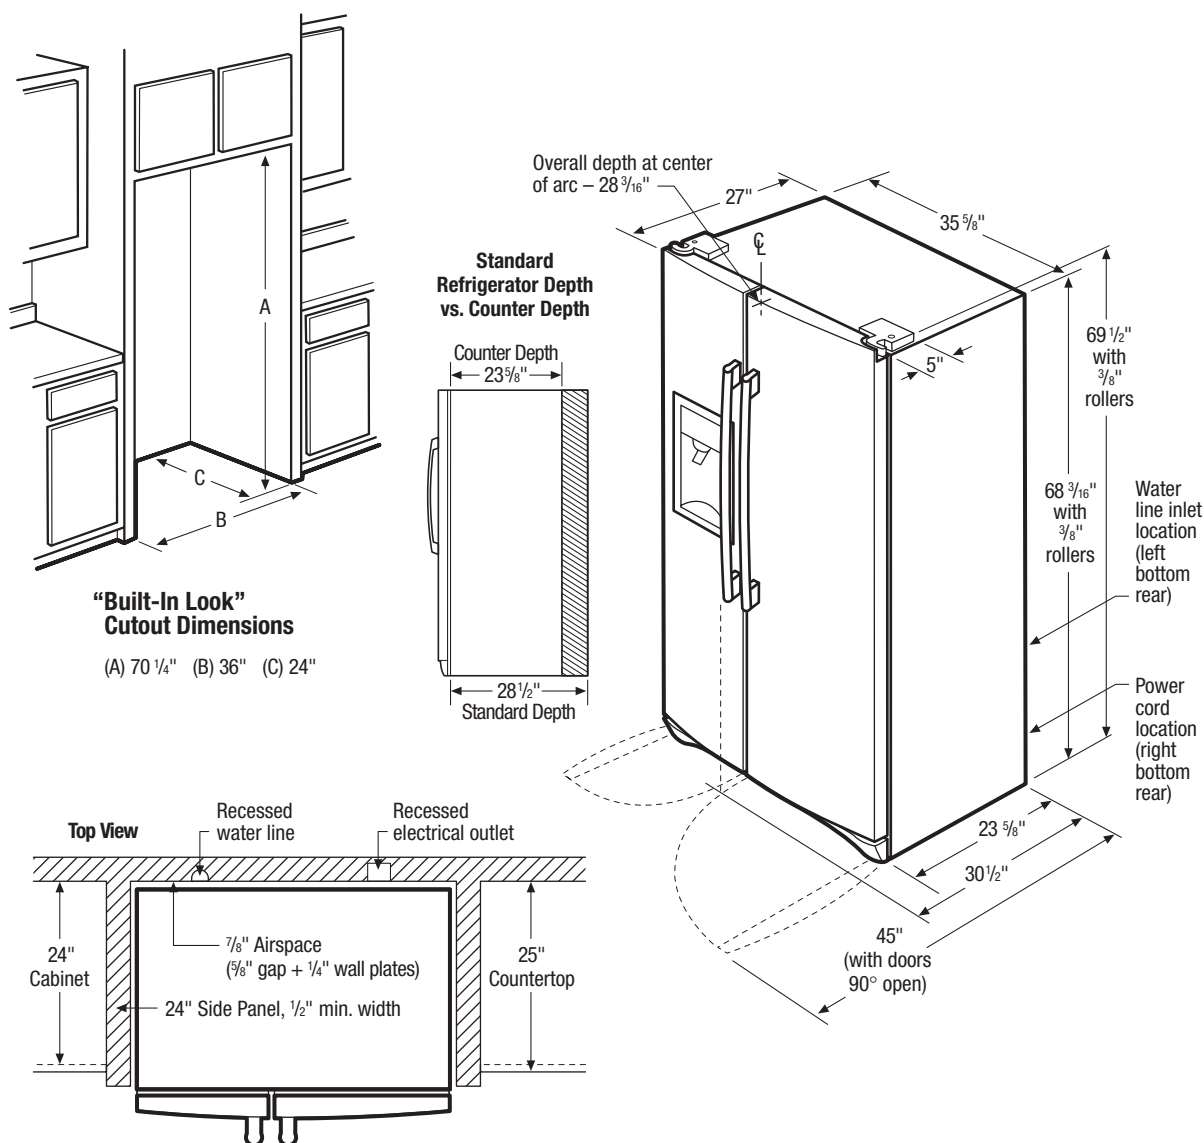

## Counter-Depth Refrigerator Specifications

- Product Weight – 300 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating – 120V/60Hz/15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.02kW
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and/or national electric & plumbing codes.
- Optimum door swing factory set for 130°. When installing next to wall where handle may make contact, allow 4-1/2" minimum clearance for 90° door swing. At 90° door stop position, drawer access will be maintained but removal will be restricted.
- Refrigerator must be placed on level surface of hard material, capable of supporting unit when fully loaded.

## "Built-In Look" Specifications

- Minimum opening of 70-1/4" H x 36" W x 24" D required for standard "Built-In Look."
- Remove all wall/floor molding prior to installation.
- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage. (Minimum tubing size recommended is 48" x 1/4").

**Note:** For planning purposes only. Refer to Product Installation Guide on the web at [electroluxappliances.com](http://electroluxappliances.com) for detailed instructions.

USA • 250 Bobby Jones Expressway • Augusta, GA 30907 • 1-877-4electrolux (1-877-435-3287) • [electroluxappliances.com](http://electroluxappliances.com)  
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [electroluxappliances.ca](http://electroluxappliances.ca)

EI23CS55G 03/08

© 2008 Electrolux Home Products, Inc.



High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

Printed in the U.S.A.