





**18 GA. (1.2) A40 GALVANNEALED
(POLYURETHANE CORE)**

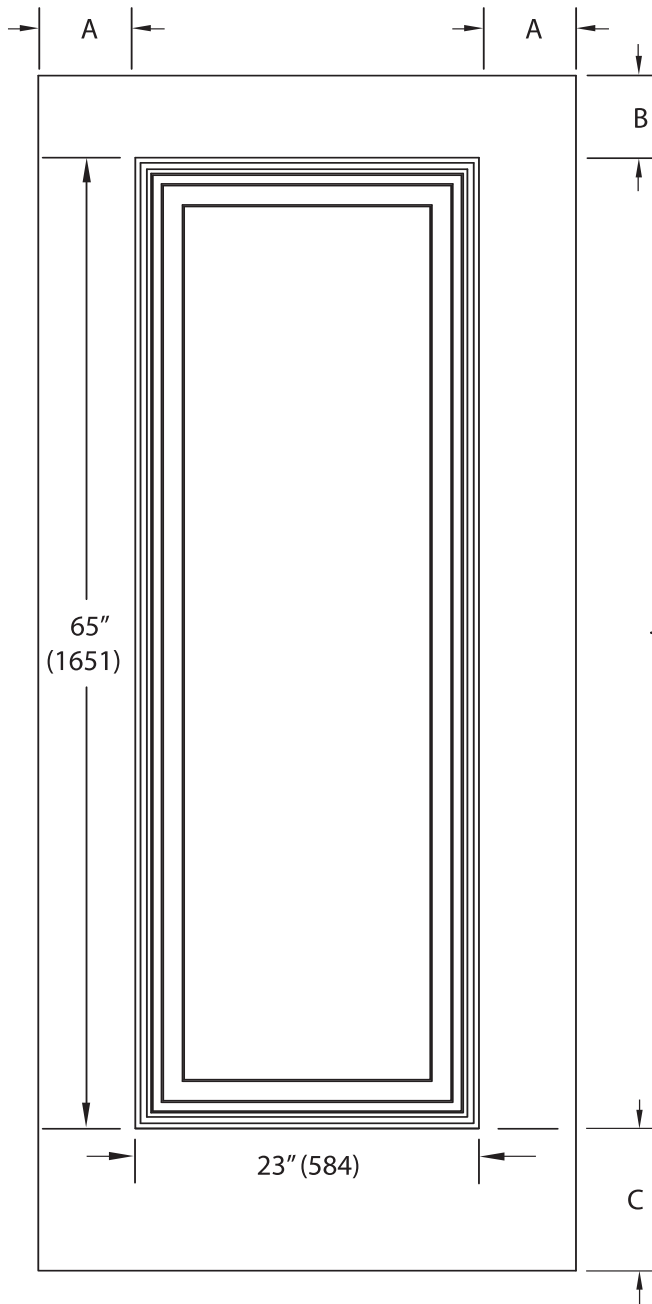

NOMINAL DOOR WIDTH	A DIM.
2'8" (813)	4-25/64" (111.5)
3'0" (914)	6-25/64" (162.3)

NOMINAL DOOR WIDTH	B DIM.	C DIM.
6'8" (2032)	5-3/8" (136.5)	8-3/4" (222.3)
6'8" (2032) **	4-3/8" (111.1)	9-3/4" (247.7)
7'0" (2134)	7-3/8" (187.3)	10-3/4" (273.1)

Profile

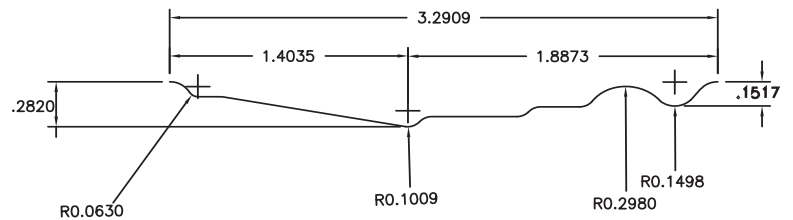

- UP TO 3 HOUR FIRE RATING
- CYLINDRICAL LOCKS *
- MORTISE LOCKS * ON 3-0 WIDTH ONLY
- AVAILABLE IN 2-8 AND 3-0 WIDTHS
- AVAILABLE IN 6-8 ** AND 7-0 LENGTHS

BEVELS AVAILABLE

"A" BEVEL, "B" BEVEL, NON-HANDED

* VERIFY HARDWARE ADAPTABILITY TO EMBOSSED PANEL DESIGN

** ADA COMPLIANT DOORS (AVAILABLE IN 6-8 LENGTH ONLY).