
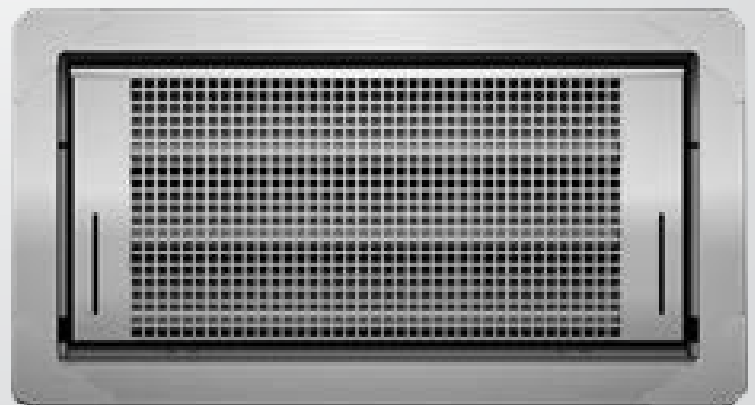



ACCESSORIES & PAINT OPTIONS

Smart Vent Products, Inc. offers everything you need to complete your project.



1 Trim & Sleeve Kits

Trim and sleeve kits fit into the rough opening in order to provide a clean, finished look on the interior wall.

They are available for all compatible models including multi-frame units.* *not available for Overhead Garage Door models

STANDARD MODELS

FOR 16" x 8" VENTS (2 PIECE)

- 1540-531-12
kits adjustable from 7" - 12.5"
- 1540-531-15
kits adjustable from 10" - 15.5"

Standard finish:
316L Stainless Steel

WOOD WALL MODELS

FOR 14.5" x 8.5" VENTS (1 PIECE)

- 1540-573
4" wall depth
- 1540-573-9
9" wall depth

Standard finish:
Powder Coat White



2 Fire Dampers

Our two Fire Damper models are UL Certified to provide 2 or 3hrs of fire resistance. They are intended to be used when flood vents are being installed into a fire rated wall. Available for models up to a 2 x 3 configuration.

A fusible link holds a galvanized steel door in place. At 165° F, the link melts to permit the door to drop, blocking the path of the fire.

Trim flange and inner sleeve are required for installation, as well as an 8" minimum wall thickness.

STANDARD 16" x 8" MODEL

- 1540-530
2 or 3 hour fire resistance available

STANDARD 14.5" x 8.5" MODEL

- 1540-537
2 or 3 hour fire resistance available



3 Powder Coat Paint

Smart Vent Products, Inc. offers all of their flood vents in Stainless Steel, Standard Powder Coat Paint Colors of: White, Wheat, Gray, or Black, but can be custom color matched to your project's needs.

