

Membranes • Sheet Membranes • Butyl Membranes • Drainage Systems • Air & Vapor Barriers • Deck Coatings • Waterproofing Systems • Hot Applied Membranes • Liquid Membranes • Spray Applied Membranes • Membranes • Butyl Membranes • Drainage Systems • Air & Vapor Barriers • Deck Coatings • Waterproofing Systems • Hot Applied Membranes • Liquid Membranes • Spray Applied Membranes • Membranes • Drainage Systems • Air & Vapor Barriers • Deck Coatings • Waterproofing Systems

# LiquiFiber™ — Revolutionizing How Details Are Flash

CARLISLE COATINGS & WATERPROOFING INCORPORATED



800.527.7092 | [www.carlisle-ccw.com](http://www.carlisle-ccw.com)



# LiquiFiber Revolutionizing How Details Are Flashed

Carlisle Coatings & Waterproofing Incorporated (CCW) provides a broad range of solutions for building envelope protection. CCW provides technical services, research and development and manufacturing capabilities from its headquarters in Wylie, Texas and three additional manufacturing facilities in Terrell, Texas, Elberton, Georgia and Carlisle, Pennsylvania. The CCW network is further supported by over 50 sales representatives directed by regional sales offices throughout the country. CCW offers a complete line of waterproofing and air and vapor barrier products for the architectural, general construction, industrial and maintenance industries. CCW is a division of Carlisle Construction Materials Incorporated, the largest division of Carlisle Companies, Inc. a publicly traded company (NYSE: CSL).

## PRODUCT DESCRIPTION

LiquiFiber from Carlisle Coatings and Waterproofing consists of randomly oriented glass strands formed into cohesive mats with a water-soluble binder. LiquiFiber is laid into a wet layer of CCW liquid-applied membrane so that the binder dissolves and the glass strands become fully integrated with the membrane. Upon cure, the CCW membrane that is reinforced with LiquiFiber exhibits higher multi-axial tensile strength and tear resistance than typical sheet membrane products.



### FEATURES AND BENEFITS

- Randomly oriented glass strands
- High-strength reinforcement
- Integrates into liquid membrane
- Allows for faster installation
- Serves as a replacement for self-adhered flashing
- Conforms to difficult details
- Creates a seamless, monolithic and continuous air barrier

*Great For  
Detailing  
Windows*



1 Seal any gaps larger than  $\frac{1}{8}$ " before applying fluid-applied air barrier and LiquiFiber with CCW-201 or approved sealant.



2 Apply 30 wet mils of fluid-applied membrane into rough opening.



3 Apply 30 wet mils of fluid-applied membrane at least 3" onto sheathing.



4 Tear or cut LiquiFiber to fit detail.





5 Apply LiquiFiber onto wet membrane.



6 Ensure that LiquiFiber overlaps neighboring pieces by at least 2".



7 Fold LiquiFiber into rough openings and corners.



8 Apply second coat at 30 wet mills onto rough opening and sheathing.

LiquiFiber can also be used on other details, such as:



Outside Corners



Inside Corners



Pipes

**For Detailing:  
Corners, Pipes  
and more!**

## TECHNICAL DATA

Property	Test Method	Results*	Results**
Puncture Resistance – Maximum Load	ASTM E154	23.9 lbs	24.8 lbs
Puncture Resistance – Maximum Elongation	ASTM E154	171%	175%
Resistance to Tear Initiation	ASTM D4073	47.9 lbs	56.6 lbs
Resistance to Tear Propagation	ASTM D751 – Tongue Tear	10.0 lbs	9.8 lbs
Breaking Strength – Grab Test	ASTM D751 – Procedure A	81.5 lbs	84.8 lbs
Elongation at Break – Grab Test	ASTM D751 – Procedure A	30.4%	21.7%
Breaking Strength – Cut Strip	ASTM D751 – Procedure B	26.6 lbs	36.4 lbs
Elongation at Break – Cut Strip	ASTM D751 – Procedure A	42.5%	64.8%

\* LiquiFiber-W set in Barritech VP membrane

\*\* LiquiFiber-W set in Barriseal/Barricoat-R membrane


## PACKAGING

LiquiFiber-W is provided in conveniently sized rolls packed in a tough, water-resistant, re-closable plastic bag and the bagged rolls are packed in a labeled cardboard carton.

P/N **317487** LiquiFiber 6" x 300' rolls,  
8 rolls per case (1,200 sq. ft.)

P/N **317488** LiquiFiber 12" x 300' rolls,  
4 rolls per case (1,200 sq. ft.)

LiquiFiber can be used in conjunction with these fluid-applied air barriers from Carlisle:

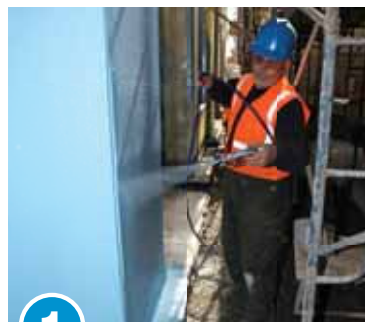

**1**

Barritech™ VP



**2**

Barriseal®



CCW  WEB

Visit Our Web Site at  
[www.carlisle-ccw.com](http://www.carlisle-ccw.com)

- Updates
- Data Sheets
- Contacts
- Guide Specifications
- Architectural Details
- Technical Bulletins

## LIMITED WARRANTY

Carlisle Coatings & Waterproofing, Incorporated (Carlisle) warrants this product to be free of defects in workmanship and materials only at the time of shipment from our factory. If any Carlisle materials prove to contain manufacturing defects that substantially affect their performance, Carlisle will, at its option, replace the materials or refund its purchase price.

This limited warranty is the only warranty extended by Carlisle with respect to its materials. There are no other warranties, including the implied warranties of merchantability and fitness for a particular purpose. Carlisle specifically disclaims liability for any incidental, consequential or other damages, including, but not limited to, loss of profits or damages to a structure or its contents, arising under any theory of law whatsoever.

The dollar value of Carlisle's liability and buyer's remedy under this limited warranty shall not exceed the purchase price of the Carlisle material in question.

900 Hensley Lane • Wylie TX 75098  
800-527-7092 • [www.carlisle-ccw.com](http://www.carlisle-ccw.com)

