

# Sanparrel Informational Series

## S460 Donor Board

### Standard Sizes


- ▶ Donor Board: 27" x 36"
- ▶ Side Expansion Board: 20<sup>3</sup>/<sub>4</sub>" x 11"
- ▶ Magnetic Nameplate: 1<sup>1</sup>/<sub>4</sub>" x 3"

### Production Styles

- ▶ Tactile
- ▶ Partial Inlay

### Additional Information

- ▶ Manufactured from Sanparrel Rigid Vinyl Sheet: nameplates manufactured from brushed gold or silver on black styrene
- ▶ Signs available in more than 180 colors and patterns
- ▶ Logos available; digital file required (eps, wmf, dmx or ai files accepted)

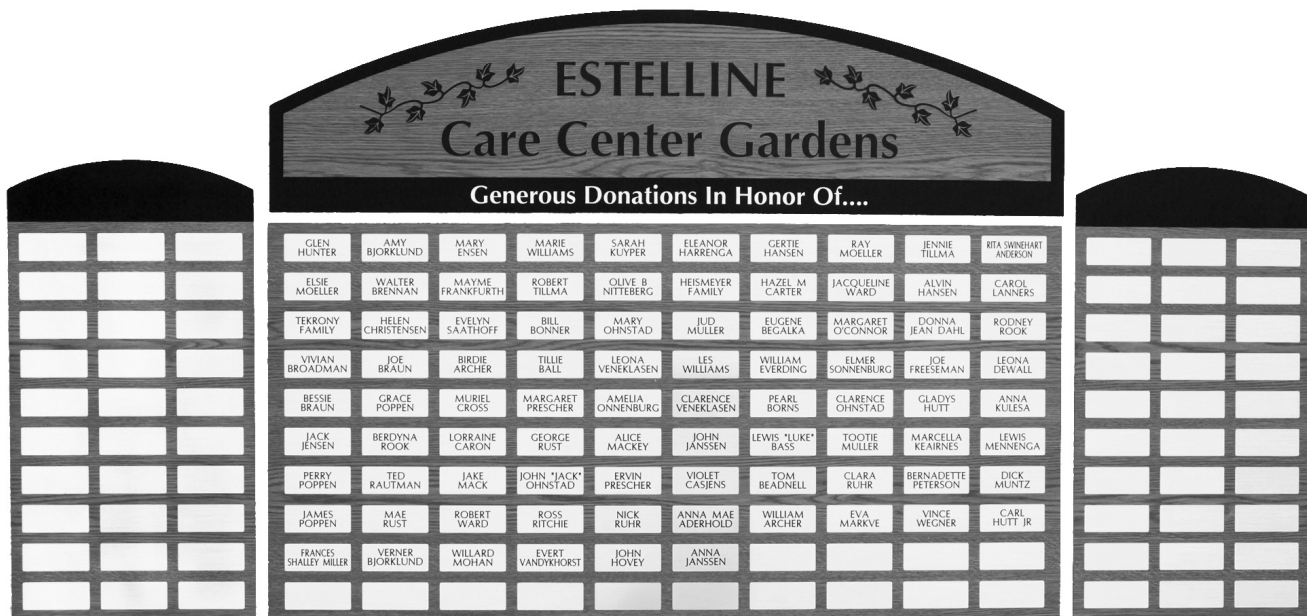

Donor Board

Side Expansion Board

IPC.991/REV.2



P.O. Box 406 · Muskego, Wisconsin 53150 USA  
 inprocorp.com  
 Nationwide 800.222.5556/Fax 888.715.8407  
 International Sales 262.679.5521/Fax 262.679.5524

**InPro**  
**SIGNSCAPE**  
 Signage and Wayfinding

# S460 Donor Board

## Suggested Specifications

---

---

### PART 1 – GENERAL

#### 1.01 SUMMARY

A. Interior Donor Board

#### 1.02 SECTION INCLUDES

A. S460 Donor Sign

#### 1.03 REFERENCES

A. Americans with Disabilities Act (ADA)

B. American National Standards Institute (ANSI)

#### 1.04 SYSTEM DESCRIPTION

A. Performance Requirements: Provide signage systems that conform to the following requirements of regulatory agencies and the quality control of InPro SignScape.

1. Signage shall comply with all applicable provisions of the ADA and ANSI A117.1-1998

#### 1.05 SUBMITTALS

A. Product Data: Manufacturer's printed product data for each signage system indicated in this section.

B. Detail Drawings: Detail drawings showing sizes and lettering, construction details of each type of sign and mounting details with appropriate fasteners for specific project substrates.

C. Samples: Verification samples of signage systems minimum of 6 inches square of each type and color indicated.

D. Manufacturer's Installation Instructions: Printed Installation Instructions for each signage system.

#### 1.06 DELIVERY, STORAGE AND HANDLING

A. Deliver materials in unopened factory packaging to the jobsite.

B. Inspect materials at delivery to assure that specified product have been received.

C. Store in original packaging in a climate controlled

environment away from direct sunlight.

#### 1.07 WARRANTY

A. Standard InPro SignScape limited lifetime warranty against material and manufacturing defects.

### PART 2 – PRODUCTS

#### 2.01 MANUFACTURERS

A. Acceptable Manufacturer: InPro SignScape, InPro Corporation PO Box 406, Muskego, WI 53150 USA Telephone 800-222-5556, Fax: 888-715-8407

E-mail: service@inprocorp.com

B. Substitutions: Not permitted

C. Provide all signage systems from a single manufacturer.

#### 2.02 MANUFACTURED UNITS

A. S460 Donor Board

1. Overall size: 27" (.686m)h x 36" (914m)w

a. Header: Provide Donor Board Header, 9"h x 36"w, consisting of .060" sheet bonded to a back layer of .080" sheet. Top layer, 7"h x 34.75"w, of .040" sheet is bonded to the two back layers, leaving a border. A text layer of .040" sheet is bonded and cut to form text.

b. Donor Board: Provide Donor Board, 18"h x 36"w, consisting of sheets of .040", .040", and .060" thickness bonded together. Sheets shall be of the same color/pattern. 100 nameplate openings, 1.25"h x 3"w, are cut into the top two layers of sheet. Magnetic tape, 1" wide, shall be adhered in nameplate opening.

c. Side Board Header: Provide Side Board Header, 2.75"h x 11"w, consisting of .040" sheet bonded to .040" sheet that is bonded to a back layer of .060" sheet.

d. Side Board: Provide Side Board, 18"h x 11"w, consisting of .040", .040", and .060" sheet that is bonded together. 30 nameplate openings, 1.25"h x 3"w, are cut into the front and middle layers of sheet. 1" magnetic tape is adhered in each name plate opening.

e. Nameplates: Provide Donor Board Nameplates, 1.25"h x 3"w, consisting of .060" thick material. Nameplates are engraved to produce text. 1" metal foil will be adhered to the back of nameplate. Nameplates shall mount flush in donor board.

### PART 3 – EXECUTION

#### 3.01 EXAMINATION

A. Examine areas and conditions in which the signage system will be installed.

1. Complete all finishing operations, including painting, before beginning installation of signage systems.

2. Wall surface shall be dry and free from dirt, grease and loose paint.

#### 3.02 PREPARATION

A. General: Prior to installation, clean substrate to remove dust, debris and loose particles.

#### 3.03 INSTALLATION

A. General: Locate the signage system as indicated on the approved detail drawing for the appropriate substrate and in compliance with the InPro SignScape installation instructions.

Install signage systems level and plumb at the height indicated on the drawings.

#### 3.04 CLEANING

A. At completion of the installation, clean surfaces in accordance with the InPro SignScape clean up and maintenance instructions.

