

Keep commercial washrooms clean and safe.

At Endurant[™], we fortify your washroom systems against commercial demands, offering customizable solutions to keep them clean and safe without the pressure of constant maintenance.

You shouldn't have to settle for options that simply "make do," so we offer custom solutions. And since we design and manufacture all of our own products, fortifying your washrooms against commercial burdens has never been easier.

Take advantage of the InPro Advantages.



Sustainable Products

EnviroGT™ Sustainable Building products feature materials that reduce the environmental impact, qualifying for LEED® credits and environmental certifications. The **green** ■ lets you know it's "green".



BIM Objects

BIM objects, or Building Information Models, are available for most InPro products as you plan for your next building project. A growing solution for improving architectural concepts, collaboration and precise construction, BIM objects are available when you see the yellow Download objects at inprocorp.com and AutoDesk Seek





BioPrism[™] Solid Surface

Manufactured using a bio-resin blend that contains rapidly renewable content, BioPrism Solid Surface is a more sustainable, more durable low maintenance surface solution. BioPrism can contribute to LEED® credits and is:

- Non-porous and does not support the growth of mold, mildew or bacteria
- GREENGUARD® certified
- Class A Fire Rated
- Durable, long lasting and backed by a 10-year warranty
- Available in numerous colors





BioPrism™ Solid Surface is an environmentally friendly material that's non-porous for easy cleaning and maintenance.

Built to meet your needs.

What if there was a solid surface washroom solution manufactured to meet your specific needs? With Endurant now there is.

Our BioPrism™ solid surface washroom solutions are designed to fortify your restrooms from the damages of water and commercial demands. We manufacture shower and tub surrounds and receptors per your specific order requirements saving















Decorative Panels

- BioPrism™ Solid Surface wall panels are a great alternative to tile and are easy to maintain due to grout-less design
- Surface is easy to clean, non-porous and does not promote the growth of mold, mildew or bacteria
- Standard thickness: 1/4" and 1/2"
- Custom sheet sizes: Up to 48" x 144" (4' x 12')

BioPrism™ Solid Surface is a custom product. Minimum orders may apply and product is not returnable.

Listellos

5" height












Patterns

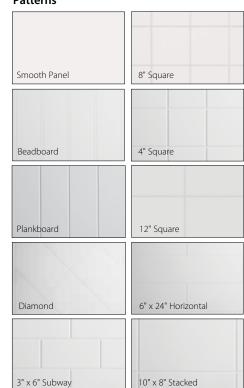

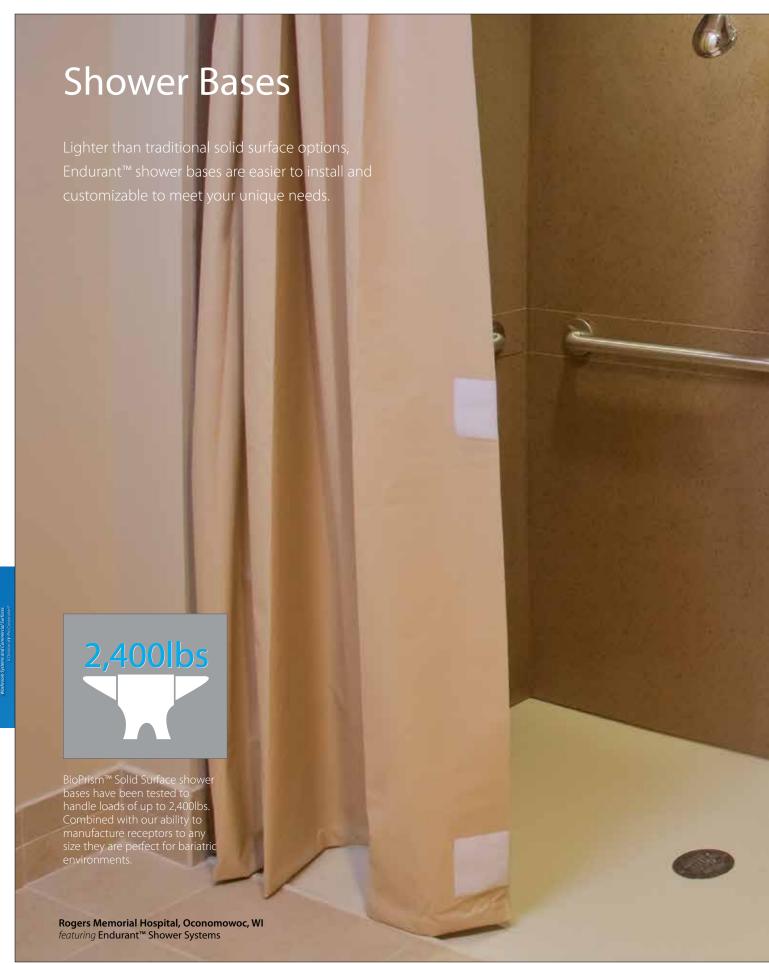







ADA Receptors ■

- Rectangular in sizes from 32" x 48" up to 36" x 60"
- Square in sizes from 32" to 42"
- Neo Angle in any size up to 42"
- Non-skid surface helps prevent slips and falls
- Custom size available

NEW! Trench Drains

Prevent dangerous water build up in receptors with NEW Trench Drains.

- Features wall to wall, low profile design with flush fit to our BioPrism™ receptors
- 41/2" wide stainless steel drain cover maximizes water flow
- Available in two standard designs can be customized to meet your needs
- Screwed down cover plates makes it ideal for areas where tamper resistance is necessary


Ramp

- Non-skid, textured surface helps prevent slips and falls
- Offers a transition between your floor to shower base or receptor
- Available in all solid colors and 6 colors with particulates (Sandbar, Trail, Candlelight, Fossil, Dolomite, and Natural
- Easily added to BioPrism[™] receptors or to existing shower bases
- Overall dimensions are 12"W and up to 72"L
- Ideal for handicap accessibility

BioPrism[™] Solid Surface - vs - Tile Installation

With more surface options than ever before, selecting the right product for your commercial shower application can be challenging at best. At Endurant we have compiled a comprehensive product comparison of two popular surfacing options: BioPrism™ Solid Surface and traditional tile.



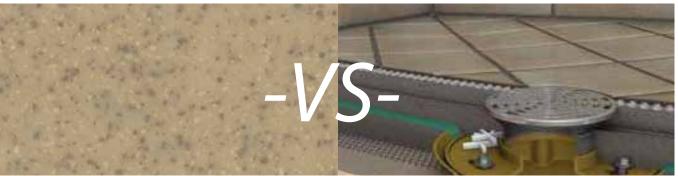

BioPrism™ Solid Surface: **4** Day Installation

12 Day Installation

Traditional Tile:

Advantages of BioPrism™ Solid Surface

- Eliminates grout lines reducing maintenance and labor costs
- BioPrism™ is non-porous and does not support the growth of mold, mildew or bacteria
- ¼" or ½" sheets can be installed over existing tile for renovation applications
- Shower bases are poured solid and require no mortar bed, pan liner or grout
- Bases feature a non-skid surface to help prevent slips and falls
- Installation of shower panels and bases is fast total time is
 1-4 days

Cons:

- Initial cost can be more expensive than tile
- Endurant offers installation training if needed

Advantages of Tile

- Available in numerous colors and patterns
- Minimal up front cost for material

Cons:

- Creating tile shower pans on site is often difficult and mistakes are common
- Tile shower bases are slick, increasing the risks for slips and falls
- Tile shower walls and bases require more maintenance than Solid Surface due to cleaning and sealing needs
- Installation may take 4-12 days and is very costly and labor intensive

Privacy and Durability Our privacy partitions are designed for hose-down cleaning, graffiti resistance, and simplified installation and handling thanks to a reinforced wood core. Moisture resistant and suitable for hose-down maintenance • Graffiti resistant and cleans without ghosting • Repairable and renewable with easy sanding Non-porous and does not support the growth of mold, mildew or bacteria Class A Fire Rated Standard heavy-duty stainless steel hardware included



ADA Grab Bars







Corner Grab Bar



Vertical/Horizontal



L Shaped Grab Bar



Folding with Wall Protection Plate



Folding/Rotating with Wall Protection Plate




Tub Seats




Straight Stainless Steel Grab Bar



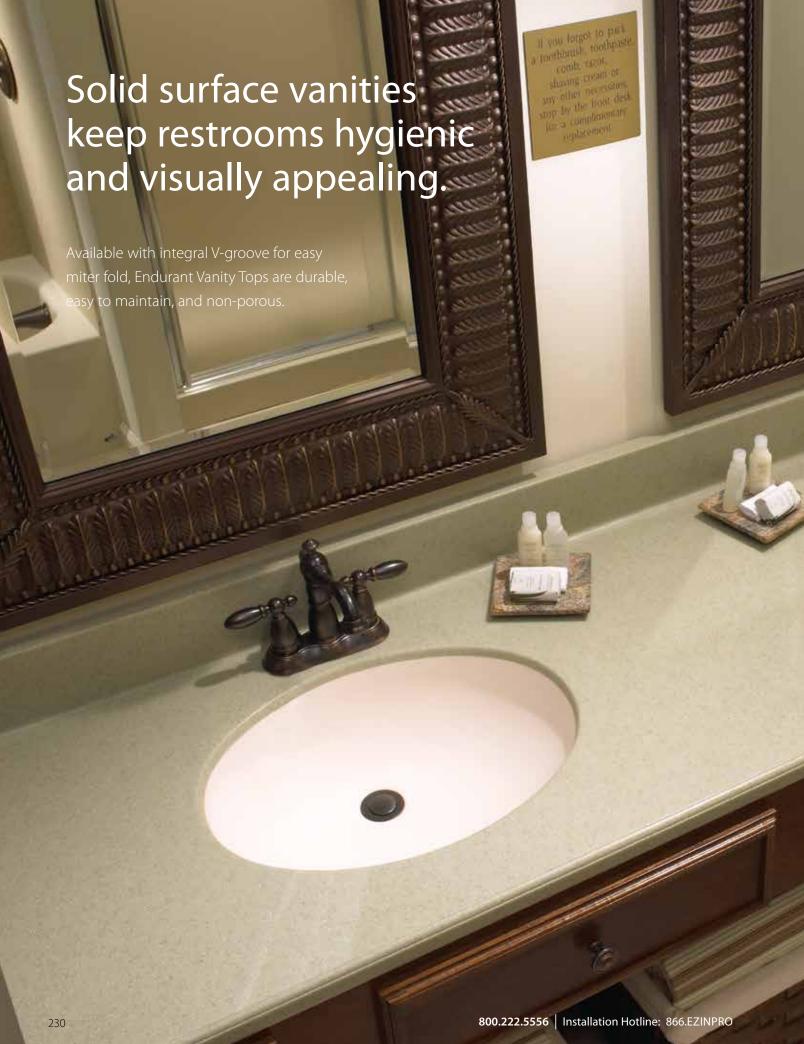




Sink Styles

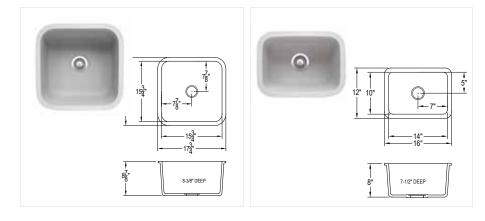

BioPrism™ Square Sink ■

BioPrism™ Small Rectangle ■

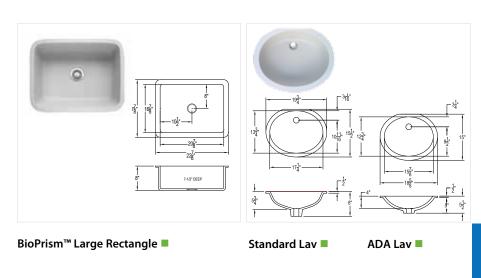






Small Lav ■


Integral Sink Style
Enclosed Overflow Lav












Bevel Edge Double Bevel Edge

Double Radius Edge

Double Ogee Edge



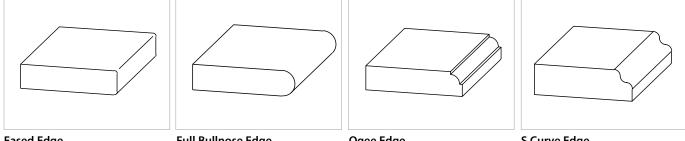

Full Bullnose Edge Ogee Edge **S Curve Edge Eased Edge**

Color Palettes

BioPrism[™] Solid Surface

With an extensive color palette, InPro Endurant™ has colors to complement your interior. Custom colors available for BioPrism Solid Surface; setup charges and minimum quantities apply.

Available as signage, countertops, vanity tops, shower walls, tub surrounds, tub decks, window sills, wall panels, conference tables, and flat stock. The standard finish on light colors is satin, semi-gloss for medium colors and gloss on dark colors. All colors available in 1/4", and 1/2" thickness.

Stocked Colors



InPro continues to support our prior color offerings for customers who have ongoing projects as well as new projects still in development. Please contact our sales team to discuss your design needs or unique requirements.

Standard Colors





Due to the printing process, colors may vary. For more accurate color selection, please request samples. Color of final product may vary slightly from sample. Warranty excludes color variation from sample to final product. Dark colors may require additional maintenance.



Advantages of Sheet Optimization

- Less square footage of material purchased
- Custom sized sheets for your specific project
- Lower freight charges
- Optimized square footage per panel means less weight to ship
- Reduced labor costs
- Optimized square footage per panel means fewer field seams
- Covers more square footage faster, reducing installation cost & time
- Reducing scrap minimizes the impact of product waste on the environment and lowers refuse collection costs

Standard Sizes

Lengths: 6', 8', 10', 12' Widths: 30", 36", 48"

1/4" thickness

144" (12')x 30", 36", 48" 120" (10') x 30", 36", 48" 96" (8') x 30", 36", 48" 72" (6') x 30", 36", 48" Can seam panels for additional width

1/2" thickness

144" (12')x 30", 36", 48" 120" (10') x 30", 36", 48" 96" (8') x 30", 36", 48" 72" (6') x 30", 36", 48"

Save money and reduce waste.

BioPrism Solid Surface stands apart from the competition by offering all colors in every sheet size and thickness.













inprocorp.com

866.EZINPRO

S80 W18766 Apollo Drive Muskego, WI 53150 USA

800.22	2.5556	toll-free

888.715.8407 toll-free fax
262.679.5521 international
262.679.5524 international fax
800.437.2698 customer service





