


# DATA SHEET

## BALI® CUSTOMISER™ ALUMINUM BLINDS

### Product Features

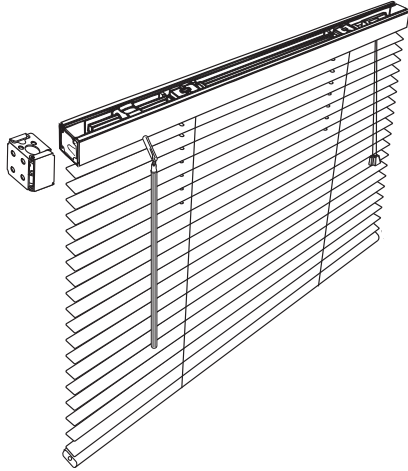

- 1" x 1" slim profile, steel headrail
- Anti-static performance to repel dust
- Low HAP, low VOC paint process
- Disengaging clutch
- Crash-proof cord lock
- .006" or .008" slat option
- Perforated slat option
- ½" slat option (Micro blind)
- GREENGUARD Gold Certified
- Limited Lifetime Warranty



### Product Specifications

**Headrail** shall be 1" high x 1" wide x .025" thick U-shaped steel. The steel finishing process includes phosphate treatment for corrosion resistance, a chrome-free sealer, a low HAP urethane primer, and a topcoat of low HAP, polyester-baked enamel.

**Tilter** shall be made of injection-molded thermoplastics for smooth, low-friction operation and will incorporate a clutch mechanism to prevent damage due to over-tilting.

**Tilt rod** shall be electro-zinc coated solid steel measuring ¼" square.

**Tilt wand** shall be clear polycarbonate with a hexagonal cross section measuring approximately ¼" diameter, attached to the tilter shaft with a spring clip for easy removal.

**Cord lock** is a snap-in design made of durable, high impact nylon with a stainless steel wear guard incorporating a floating, shaft-type locking pin. The design provides a crash-proof safety feature that will lock the blinds automatically upon release of the lift cord.

**Drum and cradles** shall be low-friction thermoplastic and provided for each ladder.

**Installation brackets** shall be made of phosphate-treated steel with a urethane primer and polyester-baked enamel finish to match headrail. The design shall incorporate a hinged front cover.

**Braided ladder** shall be made of 100% polyester yarn, incorporating two extra-strength rungs per ladder for slat support. Standard ladder spacing shall be 22.5mm.

**Slats** shall be 5000 Series cold-rolled aluminum containing the maximum allowable recycled content to produce a high strength and corrosion-resistant, flexible product. Slats shall be nominally 1" wide x .006" thick and processed to provide a smooth, hard, less porous surface with anti-static performance to repel dust. Slats shall be treated with a topcoat of polyester-baked enamel.

**Bottomrail** shall be tubular shape made of phosphate-treated steel for corrosion resistance and finished with a chrome-free sealer, low HAP urethane primer, and a topcoat of low HAP, polyester-baked enamel and shall measure .025" thick.

#### Options:

- .008" thick slat
- 21.5mm ladder spacing
- 20mm ladder spacing
- Perforated slat
- Tilt limiter
- Ring tilt
- Top-lock cord lock
- Ring pull
- Turn clips for extruded pockets
- Extension brackets
- Hold-down brackets
- 2-slat valance
- Deluxe 2-slat valance