


# DATA SHEET

## GRABER® TRADITIONS® ELITE 2" WOOD BLINDS

### Product Features

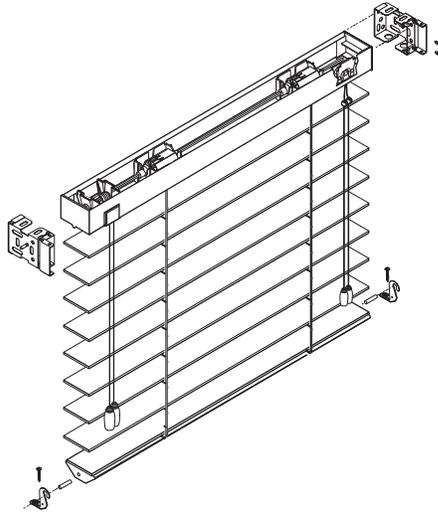

- Slats exclusively of North American hardwood
- Clear satin finish
- Custom colors available
- SureClose™ headrail system
- Fabric tapes and beaded slat options
- Cord tilt standard
- Wand tilt option
- Antique brass or wood tassels
- 1" or 2<sup>3</sup>/<sub>8</sub>" wide slat options
- Oversize blind capability
- Special shapes
- Cordless option
- Motorized option - tilt only
- Lifetime warranty

### Product Specifications

**SureClose™ Headrail** shall be 1<sup>5</sup>/<sub>8</sub>" high x 2<sup>3</sup>/<sub>8</sub>" wide x .055" thick U-shaped, extruded aluminum with 1/8" light-blocking lip on the bottom center line and finished with a powder coat paint.

**Valance** shall be lineal grained, smooth-sanded 100% North American Basswood.

**Cord Tilter** shall be a snap-in component incorporating a worm and pulley of low-friction thermoplastic and a nylon gear. Tilt cords shall be secured to pulley and treated with wood tassels at tilt end. Cord tilter is standard.

**Tilt rod** shall be electro-zinc coated solid steel measuring 1/4" square.

**Cord lock** shall be metal of a snap-in design incorporating a floating, shaft-type locking pin and shall incorporate a crash-proof safety feature that will lock blind automatically upon release of cord.

**Cradles** shall be made of low-friction polypropylene with metal lift cord rollers.

**Drums** shall be made of high strength thermoplastic, which securely anchors braided ladder or cloth tapes.

**Braided ladder** shall be made of 100% polyester yarn, incorporating two extra strength rungs per ladder for slat support. Standard ladder spacing shall be 44mm.

**Installation brackets** shall be a universal style with hinged front cover phosphate-treated steel with urethane primer and polyester-baked enamel finish to match headrail.

**Slats** shall be nominally 2" wide x .115" thick and made of lineal grained and smooth-sanded 100% North American Basswood, kiln-dried to a 6% – 10% moisture content to reduce possibility of warping. 2" slat is standard for the beaded slat option. Slats shall be stained and coated with a clear satin lacquer finish for a hand-rubbed appearance. Slats are stained and painted after cutting so ends and route holes are sealed, reducing warpage.

**Bottomrail** shall be contour-molded to a shape of 5/8" high in a trapezoid shape to improve closure. Bottomrail shall be lineal grained and smooth-sanded 100% North American Basswood, kiln-dried to a 6% – 10% moisture content and cut prior to finishing.

**Cordless lift** option uses 2" x 2 1/4" steel headrail with wand tilt only. Only available for 2" blinds.

**Options:**

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• 1" slat</li> <li>• 2<sup>3</sup>/<sub>8</sub>" slat</li> <li>• Custom color program</li> <li>• High gloss finish</li> <li>• Classic 1" or 1 1/2" fabric tapes</li> <li>• Customer Own Material (C.O.M.) fabric tapes</li> <li>• NoHoles™ privacy slat</li> </ul> | <ul style="list-style-type: none"> <li>• Wand tilt</li> <li>• Simpull® continuous cord control</li> <li>• Hold-down brackets</li> <li>• Extension brackets</li> <li>• Cut-outs</li> <li>• Tension wire</li> <li>• Specialty shapes include arches, angle top, circle, oval and trapezoid</li> <li>• Motorized - tilt only</li> </ul> |
|---|--|