

# GAFGLAS® Ply 4

Data Sheet

Updated: 1/10




*Quality You Can Trust Since 1886...  
From North America's Largest Roofing Manufacturer™*



# GAFGLAS®

## PLY 4

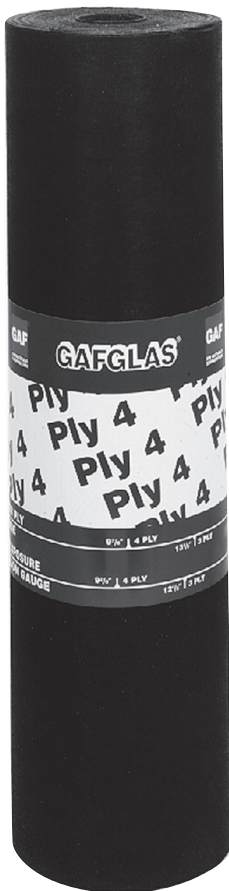

### Description

GAFGLAS® Ply 4 roofing felt is constructed with a strong glass fiber mat that is coated with the finest quality asphalt, and is designed with optimum porosity to assure a sound, watertight membrane.

### Uses

GAFGLAS Ply 4 is used as a ply felt in the construction of built-up roofs. It is designed for use in all climate zones and is appropriate for use as a base sheet, as a ply felt, and in the construction of flashing membranes.

### Advantages

- High tensile strength and a high degree of dimensional stability, resulting in a roof system with greater resistance to splitting and cracking
- Optimum porosity of the felt provides ready escape of air while allowing proper asphalt penetration at the time of mopping
- Asphalt coating provides high degree of moisture resistance
- Fire resistant—for use in UL Class A rated assemblies
- Wind uplift resistance—selected roofing assemblies with GAFGLAS Ply 4 felts meet FMRC Class 1-180 when installed over concrete decks

### Advantages (Continued)

- Meets ASTM D-2178, Type IV specifications
- Meets requirements for application in all climate zones
- Rolls out flat for easy installation
- Typical system guarantees available for up to 15 years, select system constructions available with up to 20 year guarantee coverage.

### Applicable Standards

Meets ASTM D2178, Type IV
FM Approved
ICC ESR#1274
Miami-Dade County Product Control Approval
UL/ULc Listed

### Products Specifications (nominal)

Roll Size	5 squares (531 gross sq.ft.) (49.3m <sup>2</sup> )
Roll Length	161.8' (49.3m)
Roll Width	39.375" (1.0m)
Approx. Roll Weight	34.9 lbs (20.0kg)