

Ruberoid® MOP Granule

Data Sheet

Updated: 1/10



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*



RUBEROID® MOP GRANULE

Description

RUBEROID® MOP GRANULE membrane is a tough, resilient modified bitumen membrane manufactured to stringent GAF Materials Corporation specifications. Its core is a strong, resilient, non-woven polyester mat that is coated flexible, SBS polymer-modified asphalt and is surfaced with mineral granules.

Uses


RUBEROID® MOP GRANULE is designed for new roofing and reroofing applications as well as the construction of flashings. RUBEROID® MOP GRANULE is also an ideal product for repairs of built-up roofing membranes or other modified bitumen systems.

Advantages

- Typical system guarantees available for up to 15 years, select system constructions available with up to 20 year guarantee coverage.
- Lightweight—installed roof designs weigh less than 2 pounds per square foot.
- Durable—specially formulated modified asphalt gives RUBEROID® MOP GRANULE lasting performance.
- Resilient—RUBEROID® MOP GRANULE'S polyester mat core allows it to resist splits and tears due to its pliability and elongation characteristics.

Advantages (Continued)

- RUBEROID® MOP GRANULE membrane is backed by GAF Materials Corporation, a company with over 100 years in the roofing business.
- Available in granulated black, white, burnt sienna blend, cedar blend, slate blend, weathered wood blend.

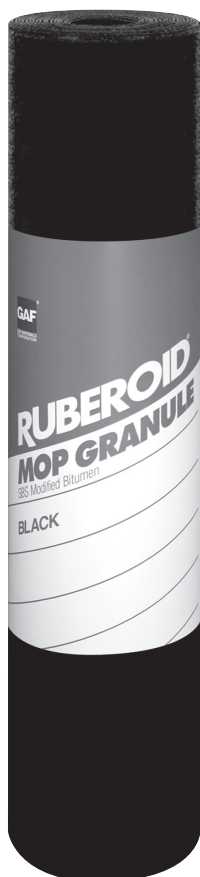

Applicable Standards

Meets ASTM D6164, Type I, Grade G
FM Approved
Meets CGSB-37-GP-56M
ICC ESR#1274
Miami-Dade County Product Control Approval
State of Florida Product Approval
Texas Department of Insurance
UL/ULc Classified
City of Los Angeles RR 25271

Products Specifications (nominal)

Roll Size	1 square (107.5 gross sq.ft.) (9.99m ²)
Roll Length	32.56' (9.92m)
Roll Width	39.625" (1.0m)
Approx. Roll Weight	90 lbs (41kg)
Product Thickness	0.140" (3.56mm)

This product meets or exceeds the following ASTM D6164, Type I, Grade G, minimum requirements:

Property	Test Method	Value
Tensile Strength @ 0°F (min), lbf/in	ASTM D5147	70
Elongation @ 0°F (min), %	ASTM D5147	20
Low Temperature Flexibility (max), °F	ASTM D5147	0
Tear Strength (min), lbf	ASTM D5147	55
Dimensional Stability, (max) %	ASTM D5147	1