


FRONT ELEVATION
NOT TO SCALE

SPECIFICATIONS

- 16 GAUGE (1.520mm) COLD ROLLED STEEL FRAME
- 16 GAUGE (1.520mm) COLD ROLLED STEEL DOOR
- 22 GA (.853mm) GALV STEEL DRYWALL BEAD
- NO HINGE, FULLY REMOVABLE DOOR
- FLUSH SCREWDRIVER OPERATED CAM LATCH WITH PLASTIC GROMMET
- FRAMES ARE PROVIDED WITH .25" MOUNTING HOLES
- GRAY BAKED ON POWDER COAT FINISH
- VISIBLE FINE LINE EDGE OF DOOR & FRAME PAINTED WITH WHITE BAKED ON PRIMER

OPTIONS

- GALVANIZED BONDERIZED STEEL
- KEY OPERATED CAM LOCK, TWO PER PANEL
- PREPARATION FOR 1.50" MORTISE CYLINDER (CYLINDER PROVIDED BY OTHERS OR BY FACTORY)

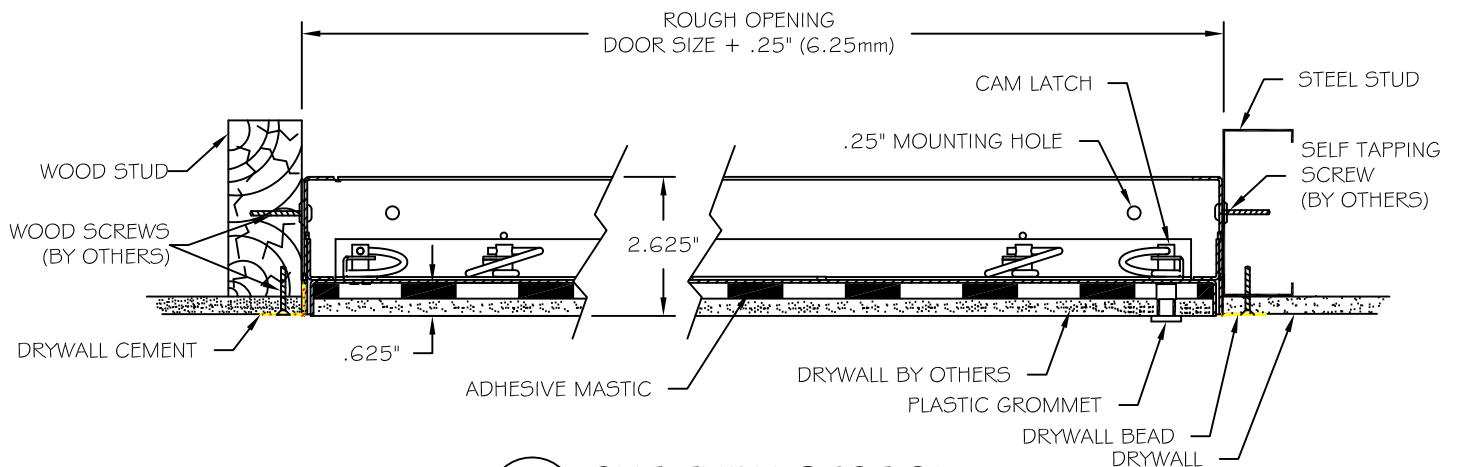

CUT-THRU SECTION
NOT TO SCALE