
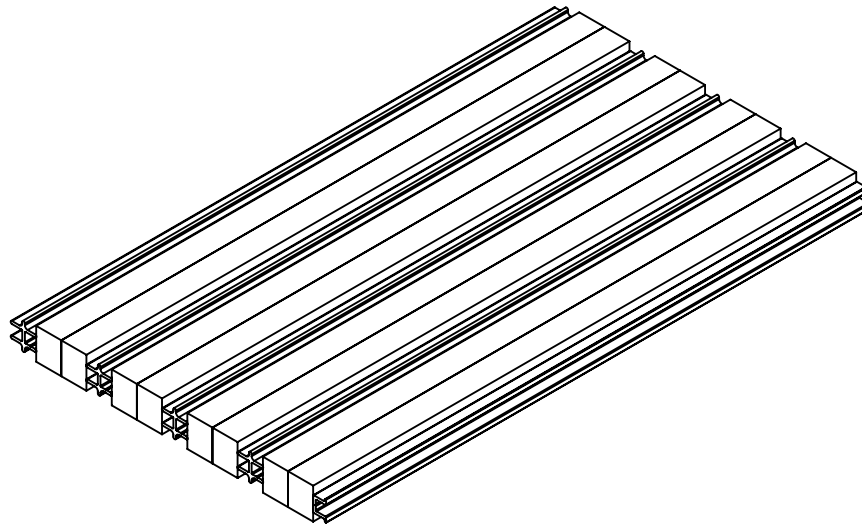


**ENVIRON**Tread II®

**ISO VIEW**

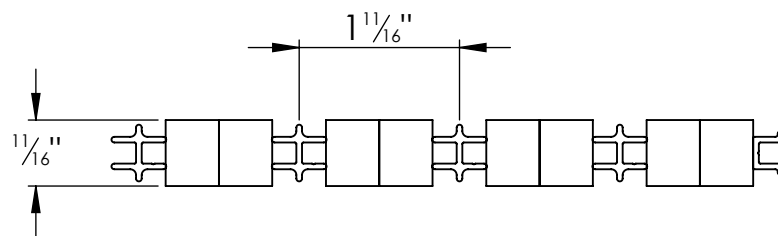

**WIDTH VIEW**

Detail notes:


1. Tread rails must run perpendicular to traffic direction.
2. Grate dimensions allow for clearance between grate sections and frame in the width dimension only.

Specifications:

Model G-218D EnvironTread II reversible grate is 1 1/16" (17.9mm) deep with alternating 6063-T52 aluminum alloy divider bars and recycled buffed rubber double treads. Spaced 1-11/16" (42.9mm) on center. Assembled with .105" (2.7mm) diameter galvanized steel wire, 1-1/2" (38.1mm) on center.

Frame options:

F-11, level bed  
F-14, tapered angle

PROJECT:					
ARCHITECT:					
CONTRACTOR:					
 Right to site. 9300 73rd Avenue North Minneapolis, MN 55428				DESCRIPTION:	
				EnvironTread II Grate Gray Recycled Buffed Rubber Double Tread Reversible Tread	
	NAME	DATE	SIZE	MODEL NO.	REV
DRAWN	MDS	1/12/12	A	G-218D	A
RELEASED	PGE	3/8/12	SCALE: NTS	SHEET 1 OF 1	