


WIDTH VIEW

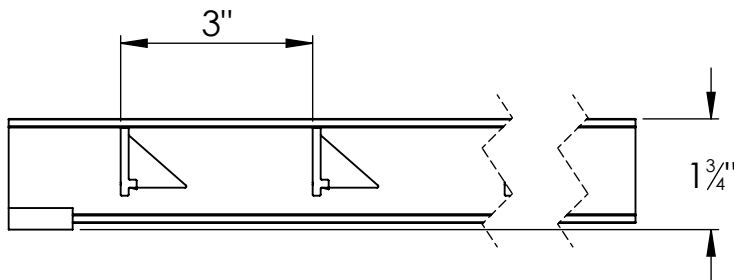

LENGTH VIEW

Detail notes:

1. Tread rails must run perpendicular to traffic direction.
2. Traffic direction dimension can only be changed in 3/4" (19.1mm) increments unless aluminum filler is attached to the frame.
3. Grate dimensions allow for clearance between grate sections and frame in the width dimension.

Specifications:

GrateDesign model G-550PAB has our thin line rail that is made with 385 alloy bronze and are 1-3/4" (44.5mm) deep, spaced 3/4" (19.1mm) on center. With keylocks spaced 3" (76.2mm) on center.

Frame Option:

- F-1AB, level bed

PROJECT:					
ARCHITECT:					
CONTRACTOR:					
 Right to site. 9300 73rd Avenue North Minneapolis, MN 55428				DESCRIPTION:	
				GrateDesign, Thin Line Grate 3" Keylock Spacing Architectural Bronze	
	NAME	DATE	SIZE	MODEL NO.	REV
DRAWN	MDS	3/14/12	A	G-550PAB	A
RELEASED	PGE	3/14/12	SCALE: NTS		SHEET 1 OF 1