

В

А

2

- (5) **GAS SPRING WITH DAMPER:** DESIGNED TO OPEN AGAINST A 10PSF SNOW LOAD IN NOT LESS THAN 2 SECONDS
- (6) HOLD OPEN ARM: LOCK COVER IN FULLY OPEN POSITION -ZINC PLATED STEEL
- (7) LATCH: ZINC PLATED ROTARY LATCH ASSEMBLY DESIGNED TO HOLD COVERS CLOSED AGAINST 30 PSF WIND UPLIFT ZINC PLATED STEEL LATCH STRIKERS ON COVERS


 $\langle 8 \rangle$  HINGES: ZINC PLATED STEEL WITH STAINLESS STEEL HINGE PINS

**SECTION B-B** 

WIDTH

- (9) INSULATION: 1" POLYISOCYANURATE IN COVER AND AROUND CURB PERIMETER, R-VALUE 6
- (10) GASKET: ADHESIVE BACKED EPDM RUBBER EXTRUSION
- (1) THERMAL RELEASE MECHANISM: VENT COVERS OPEN THERMALLY BY HEAT AT FUSIBLE LINK TEMPERATURE
- (12) MANUAL OPENING: VENT COVERS OPEN WITH INTERNAL AND EXTERNAL MANUAL PULL HANDLE, 1/16" DIA SST CABLE

SMOKE VENT SIZE	(WIDTH) x	(LENGTH)	
EFFECTIVE VENTING AREA 90%			

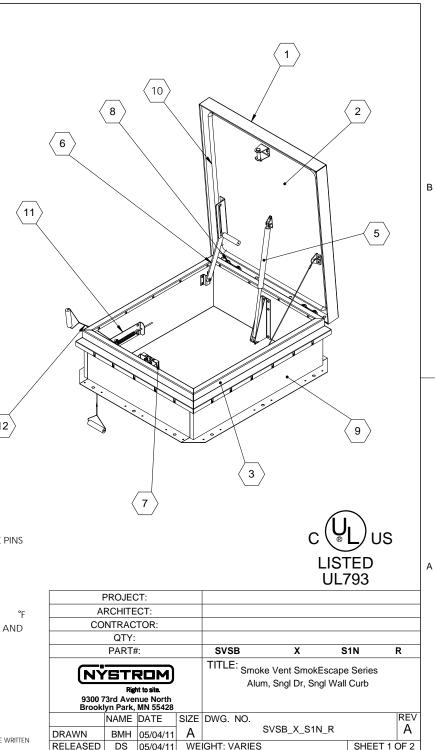

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

