

9300 73rd Ave N.
Brooklyn Park, MN 55428


Toll-Free: 800-547-2635
Fax 800-317-8770



Right to site.

Direct Phone: 763-488-9200
Direct Fax: 763-488-9201

e-mail: info@nystrom.com
Internet: www.nystrom.com

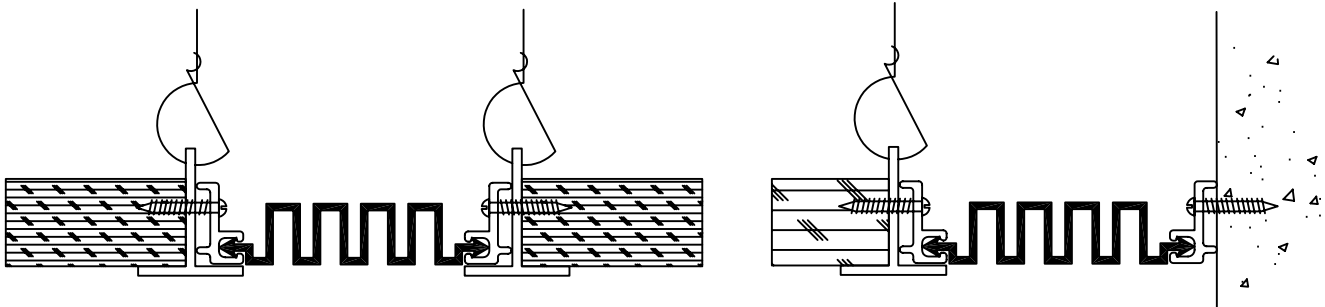


Seal Ceiling – Standard Series Model(s) "EJ–TCF" & "EJ–TCF Corner" Horizontal Expansion Control Systems

The following installation procedure is very important and must be fully understood prior to beginning any work. To ensure proper installation and performance of expansion joint system the following actions must be completed by the installing contractor. Failure to do so will affect product warranty.

- 1) Carefully read and understand installation procedure. Contact Technical Service Department for product assistance.
- 2) Inspect all shipments and materials for missing or damaged components and hardware. Contact Customer Service with order number and invoice for prompt assistance.
- 3) Inspect substrate or adjacent construction for acceptance before beginning work. Report unacceptable construction to the project manager for scheduled repair work.


PN: N20129

Standard Components

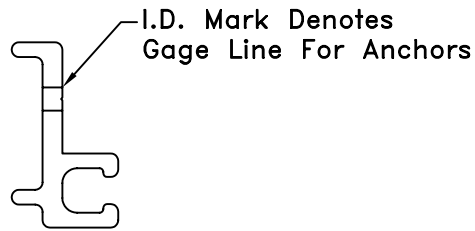

Aluminum Extrusion
Part Number – 15003


Components shown below vary in size
depending on model of system

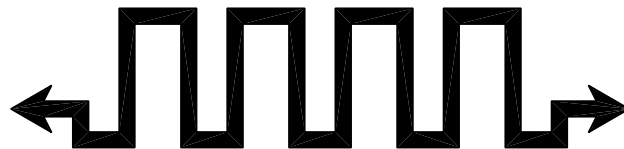


Elastomeric Seal
(Refer to Chart for Part Numbers)

Part Number				
Model	Black Seal	White Seal	Beige Seal	Gray Seal
EJ-TCF-100	15036B	15020B	15068B	15044B
EJ-TCF-150	15029B	15022B	15067B	15054B
EJ-TCF-200	15094B	15023B	15038B	15037B
EJ-TCF-300	15094B	15023B	15038B	15037B
EJ-TCF-400	15095B	15024B	15039B	15048B


Installation Procedure

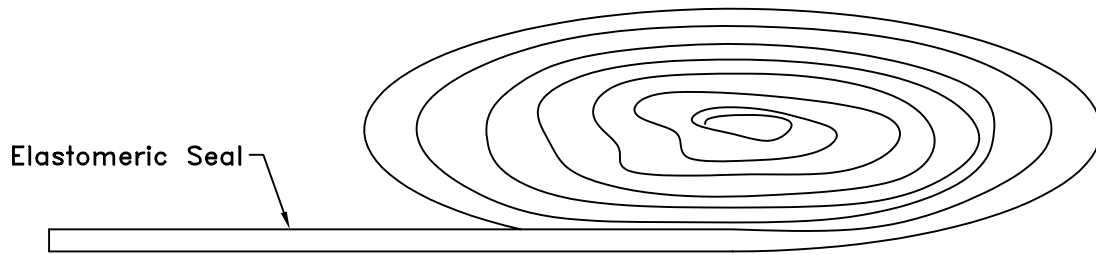


- 1 Unpackage elastomeric seal and allow it to regain its original shape which may have been distorted during shipment. Do not install seal if visual appearance is unacceptable after unpacking. Contact Customer Service Department for assistance.

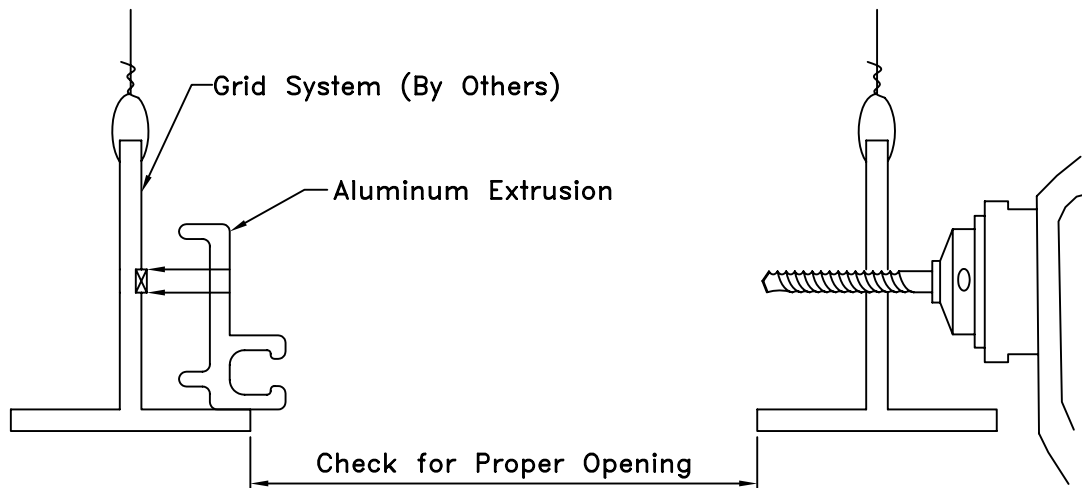


Corner Condition

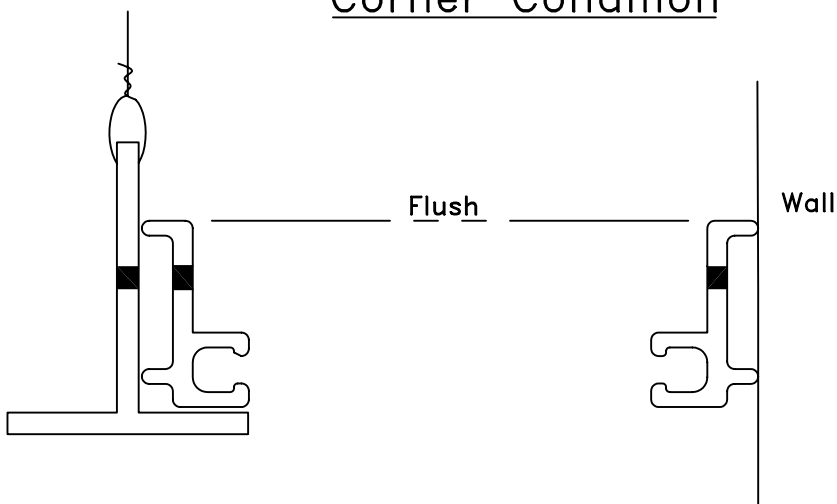


- 2 Place and adjust Aluminum Extrusions and mark locations for fasteners. Drill holes For Fasteners. (Fasteners Provided By Others)

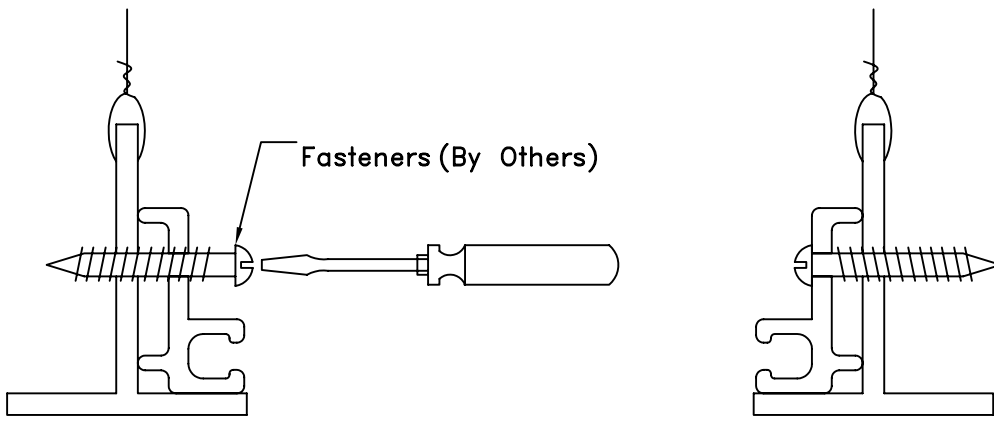


3 Using a Screw driver secure Aluminum Extrusion to Grid System or Wall.

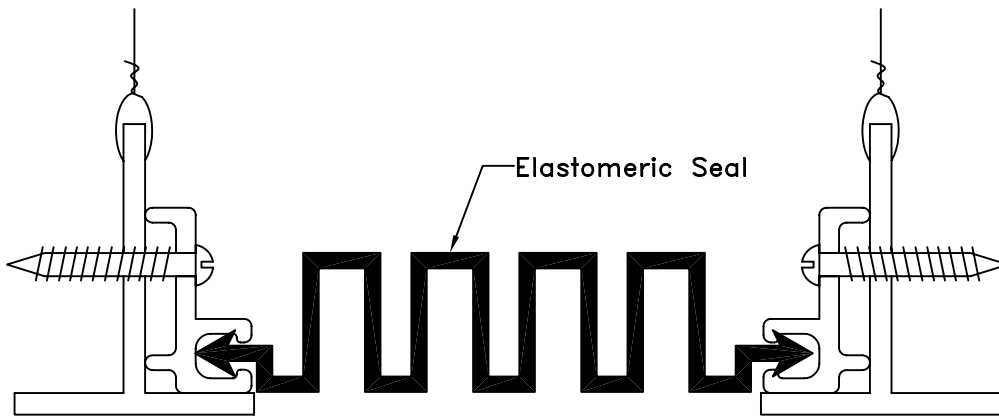

Corner Condition

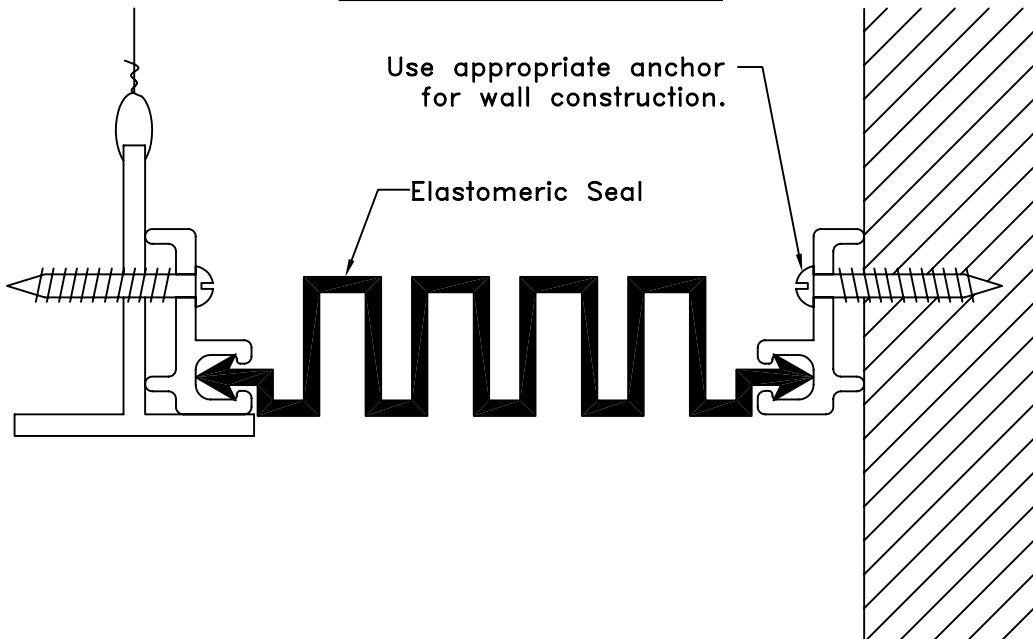

4 Install elastomeric seal. Suggested method is to slide gasket horizontally into position from end of extrusion as work progresses.

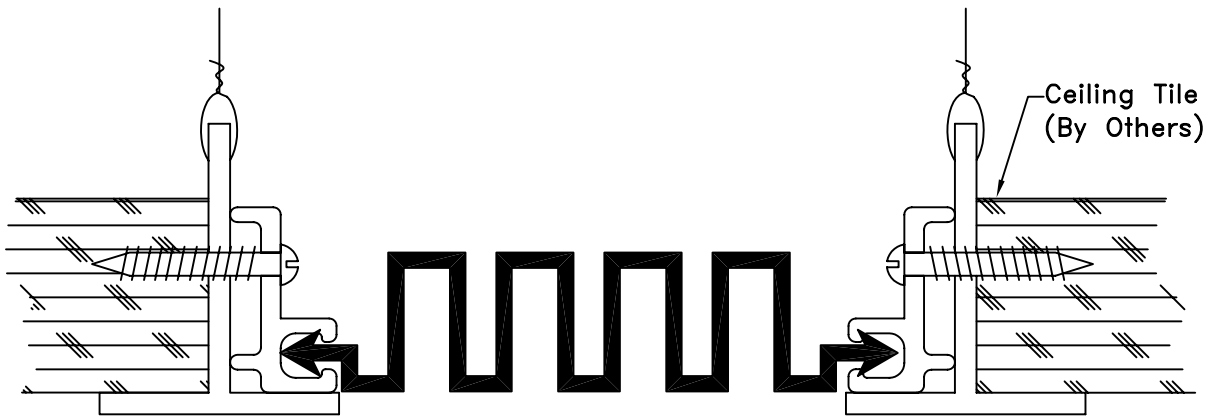

- 5 - Following manufacturers installation procedures install ceiling tile.
Note: Trim Ceiling tile to clear threaded fasteners if required.