
QUANTITY	LENGTH

COLOR

В

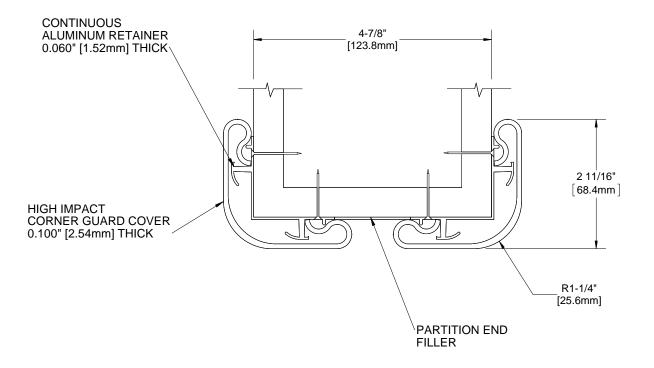

NOTES:

- PROFILE: HIGH IMPACT VINYL ACRYLIC EXTRUSION LOCKED IN PLACE, NOMINAL 0.100" (2.54mm) THICK
- 2. CLASS A FIRE RATING, TESTED TO ASTM E84
- 3. **RETAINER**: CONTINUOUS 6063 T-5 ALUMINUM, NOMINAL 0.060" (1.52mm) THICK
- 4. **EXTRUSION**: PEBBLE GRAIN FINISH WHICH CONTAINS EPA REGISTERED MICRO-CHEK ANTIMICROBIAL AGENT
- MAXIMUM LENGTH: VINYL CORNER GUARDS 20'
- 6. **HARDWARE**: #6 X 1-5/8" DRYWALL SCREWS INCLUDED
- 7. END CAP: #CGVS26875B-EC (2x REQUIRED FOR COMPLETE ASSEMBLY)
- 8. PARTITION COMPONENTS PROVIDED BY OTHERS. FINISHED LENGTH INCLUDES END CAPS.

ARCHITECT: CONTRACTOR 2 11/16" VINYL BULL NOSE NÝSTROM CORNER GUARD SURFACE MOUNT Right to site. 4 7/8" END WALL 9300 73rd Avenue North Brooklyn Park, MN 55428 NAME DATE SIZE DWG. NO. REV CGVS26875B-EW4875 Α DRAWN MDS 24APR13 RELEASED PGE 01MAY13 WEIGHT: 1.87 lbs/ft SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

PROJECT: