


EJ-FLP Series

Expansion joint cover for floors Floor to floor condition

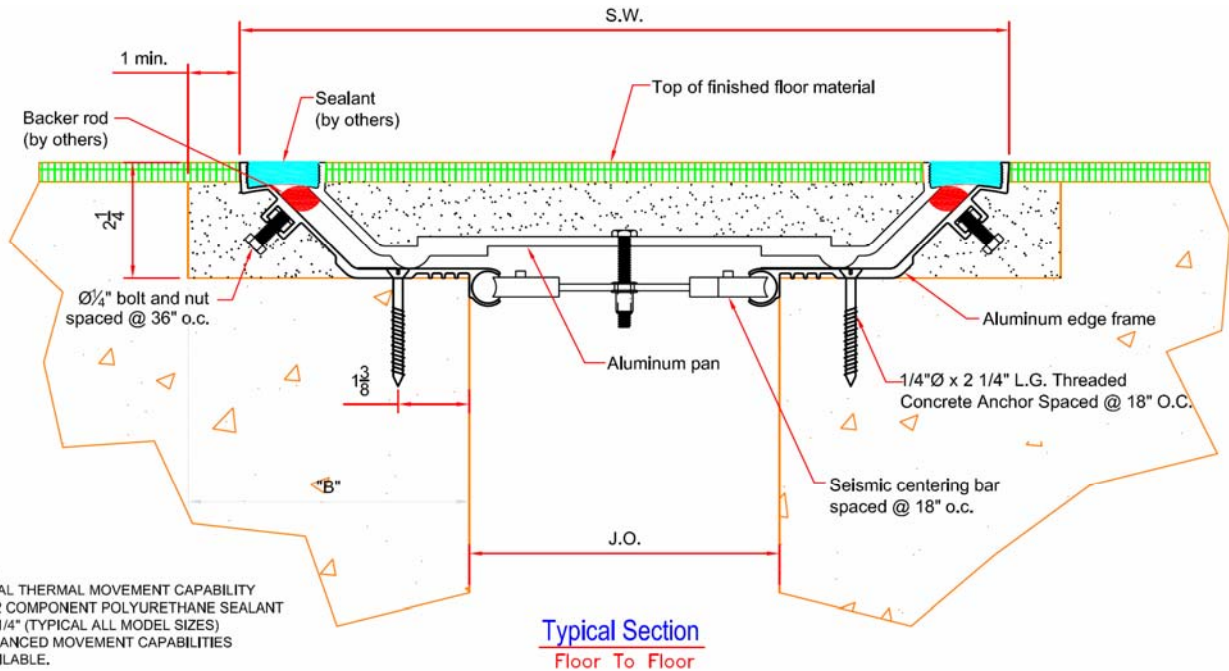

NOTE: EXPOSED ALUMINUM SURFACES MILL FINISH (STANDARD).

Model	Dimension Chart											
	Joint Opening (J.O.)						Total Seismic Movement		S.W. at install		B (min)	
	at install		allow min.		allow max.							
inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	
-FLP-400	4	100	1 1/4	32	6	152	4 3/4	121	12 7/8	327	6	152
-FLP-600	6	152	1 1/4	32	9	229	7 3/4	197	14 7/8	378	6	152
-FLP-800	8	203	1 1/4	32	12	305	10 3/4	273	18 7/8	479	7	178
-FLP-1000	10	254	1 1/4	32	15	381	13 3/4	349	20 7/8	530	7	178
-FLP-1200	12	305	1 1/4	32	18	457	16 3/4	425	23 7/8	606	7	178
-FLP-1600	16	406	1 1/4	32	24	610	22 3/4	578	29 7/8	759	8	203
-FLP-1800	18	457	1 1/4	32	27	686	25 3/4	654	34 7/8	886	10	254

Note: J.O. minimum and maximum values are after seismic movement occurs.



Right to site.

Call: 800-547-2635 Fax: 800-317-8770
 USA or Canada
 Web: www.nystrom.com
 E-mail: info@nystrom.com

PROJECT: _____

CONTRACTOR: _____

ARCHITECT: _____

INITIALS: QTY: DATE: PART NUMBER: