
2

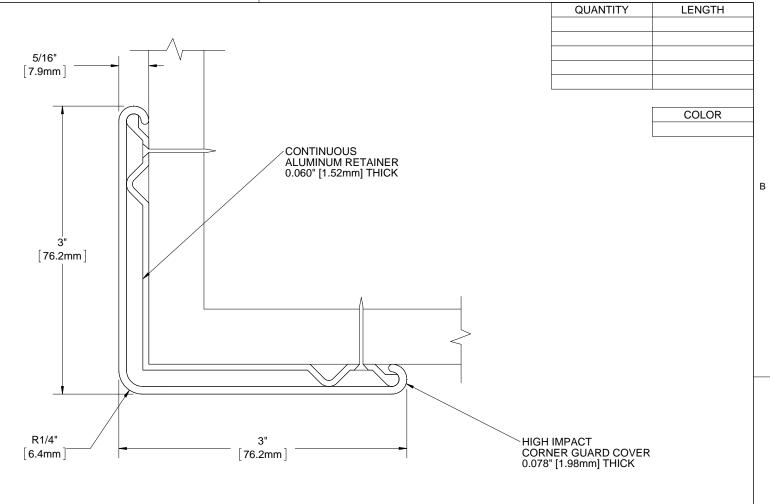

NOTES:

- PROFILE: HIGH IMPACT VINYL ACRYLIC EXTRUSION LOCKED IN PLACE, NOMINAL 0.078" (1.98mm) THICK
- 2. CLASS A FIRE RATING, TESTED TO ASTM E84
- 3. RETAINER: CONTINUOUS 6063 T-5 ALUMINUM, NOMINAL 0.060" (1.52mm) THICK
- 4. **EXTRUSION**: PEBBLE GRAIN FINISH WHICH CONTAINS EPA REGISTERED MICRO-CHEK ANTIMICROBIAL AGENT
- 5. MAXIMUM LENGTH: VINYL CORNER GUARDS 20'
- 6. HARDWARE: #6 X 1-5/8" DRYWALL SCREWS INCLUDED
- 7. END CAP: #CGVS3S-EC (2X REQUIRED FOR COMPLETE ASSEMBLY)
- 8. PARTITION COMPONENTS PROVIDED BY OTHERS. FINISHED LENGTH INCLUDES END CAPS

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

						- 1
PROJECT:						
ARCHITECT:						
CONTRACTOR:						
(NYSTROM)				TITLE: 3" VINYL CORNER GUARD SURFACE MOUNT ALUMINUM RETAINER		
Right to site. 9300 73rd Avenue North Brooklyn Park, MN 55428						
	NAME	DATE	SIZE	DWG. NO.		REV
DRAWN	MDS	24APR13	Α	CGVS3S		A
RELEASED	PGE	01MAY13	WE	IGHT: 1.05 lbs/ft	SHEET 1	OF 1

2