





- ADA and TAS Compliant
- · Serves One User at a Time
- Elongated Basin is Constructed of Evero<sup>™</sup> Natural Quartz Surface
- Select a Bradley Faucet or Faucet by Others
- Available in 20 Evero Natural Quartz Surface Colors

# **Specifications**

Accommodates one user. The units handle washroom traffic quickly and economically. while providing each user with personal space.

## Construction

### Bowl

Evero Geo Series is a natural quartz surface made from a blend of bio-based resin, natural quartz, granite and other exotic minerals. It is made of 25% recycled content.

Evero Pearl Series is a natural quartz surface made with bio-based resin, sea shells, recycled glass and natural quartz. It is made of 70% recycled content.



Variations in the natural stone color, pattern, size, shape and shade are inherent. Due to these unique characteristics, please expect subtle shade variations when units are installed adjacent to each other.

#### Pedestal

Panel is composed of decorative 300 series stainless steel.

Bowl assembly and pedestal panel are secured to a heavy gauge stainless steel support frame mounted to wall.

### Vandal Resistance

Water supplies, valves, waste assembly and other optional items are concealed within the pedestal/frame.

## **Faucet Options**

There are several hands-free faucet options available with the Verge Lavatory System. Choose from CAP-DCG, CAP-DCA or IR-DCD. For more information on these standard faucet options, please enter the model number in the search box at www. bradleycorp.com. 4" Centerset and Centershank faucet hole drillings are available for faucets by others.

# **Code Compliance and Certifications**

# **ANSI Standards**

Evero Natural Quartz Surface meets the requirements of ANSI Z124.3..

Verge Lavatory System is Uniform Plumbing Code (UPC), International Plumbing Code (IPC) and National Plumbing Code of Canada (NPC) approved through the International Association of Plumbing and Mechanical Officials (IAPMO), Manufactured in compliance with IGC 156, CSA B45 Series (R08) & ASME A112.18.1/CSA B125.1.



This plumbing fixture is designed for hand washing only. It is not Intended to dispense water for human consumption through drinking or for preparation of food or beverages.












Protected by one or more of the following U.S. Patents: D625,792 S; D633,992 S; and D642.664 S.

Plumbing Fixtures Document No. 1071 Page 1 of 4 This information is subject to change without notice.



**Models** (Must select one)

Optional Selections

□ P19-231F

□ LVGD1	Verge Lavatory System – LVGD-Series, One-Station					
Standard Selections (Must select one from each category) Faucet Drilling (select one)						
	4" Centerset [ D Infrared Fau		□ SHANK □ Cap-DCa	Centershank Drillin A Capacitive Fauce		
Soap Dispenser (select one)    6324-68						
Water Supply (select one)						
□ TMA	Navigator® Thermostatic Mixing Assembly (Hot and Cold Supplies) w/Stops					
□ NONE	and Supply Hoses No Valve Option Selected					
Color of Evero™ Bowl (select one) Geo Series						
□ AMAZON □ ANTARCTICA □ BLACK-SEA □ CABO □ GLACIER		☐ MARAKESH☐ MOJAVE☐ NASSAU☐ NEPAL☐ PUNALUU	Mojave Nassau Nepal	☐ SAHARA ☐ SERENGET ☐ TUSCANY ☐ YUKON h ☐ ZANZIBAR	Sahara  Serengeti Tuscany Yukon Zanzibar	
Pearl Series (available at an additional charge) (Non-cancelable, non-returnable)						
□ ABALONE □ AKOYA	Abalone Akova	☐ BLACK-MO		☐ TAHITIAN	Tahitian	
Color of Access Panel (select one)  STAIN Stainless Steel						
P-Trap:						
□ S-PLASTIC Single Plastic Polypropylene P-Trap □ S-CHROME Single Chrome-Plated P-Trap						


For more information on Evero Natural Quartz Surface, faucets, valves, transformers, and the soap dispensers, please visit bradleycorp.com.

110-120 VAC plug-in adapter to convert battery IR faucet


AC Adapter - 6315 soap dispenser (must order as a separate line item)

© 2013 Bradley P.O. Box 309, Menomonee Falls, WI 53052-0309 Phone: 800.BRADLEY(800.272.3539) Fax: 262.251.5817 bradleycorp.com




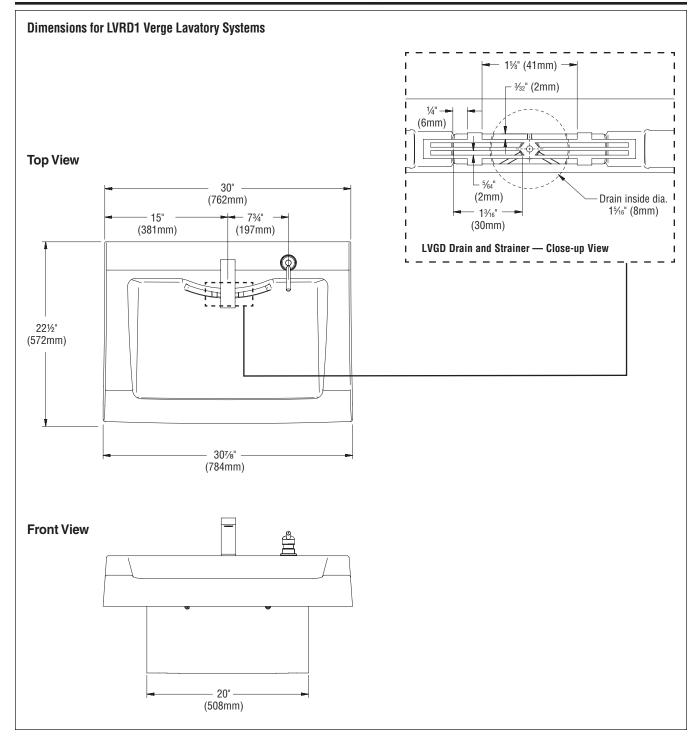



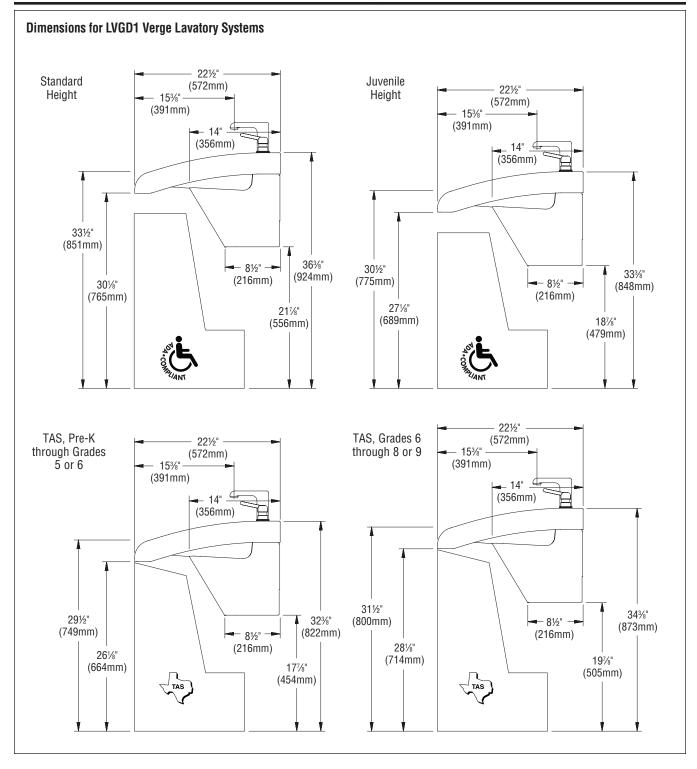



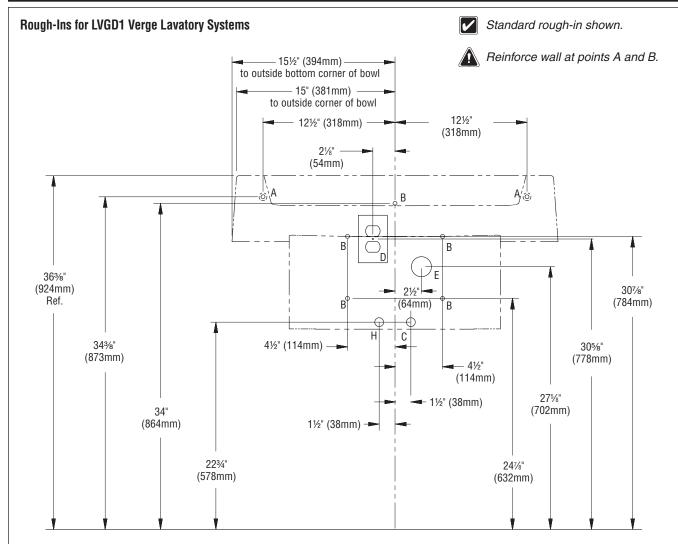

<del>i</del>					
CODE	DESCRIPTION		QTY.		
Α	%" Lav Deck Bowl Anchors with a Minimum Pull-Out Force of 1,000 lbs. (reinforce	walls at anchor points)	2		
В	%" Lav Deck Frame Anchors with a Minimum Pull-Out Force of 1,000 lbs. (reinforce walls at anchor points)		5		
H, C	½" NPT Hot/Cold Supplies, Stub-Out 2" From Wall		1		
D	110v GFI Protected Electrical Outlet (AC version only)		1		
Е	1½" NPT Drain, Stub-Out 2" from Wall		1		
RIM HEIGHT	HEIGHT VERTICAL HEIGHT ADJUSTMENTS FOR CODES A-E and H FIXTURE		E		
331/3"	None	Standard Height			

RIM HEIGHT	VERTICAL HEIGHT ADJUSTMENTS FOR CODES A-E and H	FIXTURE STYLE
331/2"	None	Standard Height
31½"	Subtract 2"	TAS, Grades 6 through 8 or 9
291/2"	Subtract 4"	TAS, Pre-K through Grades 5 or 6
30½"	Subtract 3"	Juvenile Height