

# LENOXGEAR Lenox® Gear Locker – Solid Plastic

- Tough, attractive, solid plastic never needs painting; resists dents and scratches
- Impervious to moisture lockers will not rust or delaminate
- Durable, vandal-resistant, all-welded construction
- · Wide range of sizes, colors and options
- 20-year warranty against rust, delamination or breakage under normal use\*
- Foot locker has slow closing hinge no slamming
- · Lockers ship fully assembled
- US patent numbers: 6,685,285 6,792,661 6,793,299 7,029,078 7,223,317 7,278,695 7,510,249 7,699,412 7,789,471 8,113,602
- Other patents pending

# **Construction – Standard Features**

#### Sizes

Standard Sizes: 24", 30", 36" Wide Nominal: 72" Tall

18", 21", 24" Deep

# **Upper Door and Cubby Frame**

Constructed of  $\frac{1}{2}$ " thick high-density polyethylene (HDPE) with homogeneous color and a matte textured finish. Dirt or graffiti are easily removed with standard industrial cleaners. Frame is welded to locker box to provide a secure, rigid assembly. Door has ventilation slots.

# Sides, Tops, Bottoms, Dividers and Shelves

Constructed of  $\frac{1}{2}$ " thick HDPE with homogenous color and a matte finish texture. Sides and back of box are formed from a single sheet of HDPE with fused corners. Top, bottom, divider and shelf are welded to frame without metal fasteners or dovetail joints.

## Latch Bar

Full-length latch bar is constructed of ½" thick 100% pre-consumer recycled black HDPE with a smooth finish. Runs entire length of door, providing a continuous security latching system. Latch lifts up to open and returns to closed position after door is closed. Latch bar is secured to locker door with stainless steel security TORX-head shoulder screws.

# Door Hinge

Heavy-duty, full-length piano hinge is constructed of 18 gauge, type 304 stainless steel. Hinge wraps around edges of the door and the frame and is secured with stainless steel security TORX-head screws. Hinge is powder coated to match locker color<sup>†</sup> and is field replaceable.

# Handle

Constructed of injection molded plastic. Ergonomically designed handle is ADA compliant – operates with less than 5 lbs. of force. Handle is secured through latch bar to door with stainless steel security TORX-head screws.

# Hasp

Constructed of 12 gauge stainless steel. Accepts standard padlocks with  $\frac{4}{2}$  diameter (nominal) shackle. (Long shackle padlocks should not be used.) Secured to door behind latch bar with stainless steel screws.


# Foot Locker/Bench Seat

Built-in, secure foot locker/bench seat maximizes floor space. Constructed of ½" thick HDPE sides with 1" thick HDPE hinged bench top. Hinge, which is field replaceable, is 16 gauge, type 304 SS powder coated to match locker color. Seat closes with Soft-Down Stay, a high quality safety device for safe, smooth closure every time. Recessed hasp lock, for use with standard padlocks with ½2" diameter (nominal) shackle, secures bench seat.

# Number Plates

Constructed of white acrylic with black film coating. Laser etched with numer specified. Number plates are secured with grooved rivets into a recessed pocket cut into the door. Plates must be fastened to lockers on the job by installer.

Page 1 of 3
This information is subject to change without notice. 10/11/2013

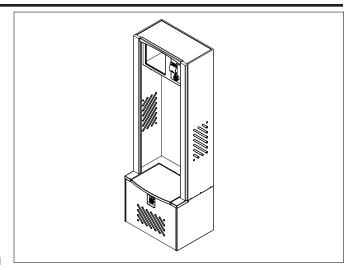

## **Installation Trim**

Constructed of 1" thick HDPE with homogenous color and a matte finish texture. Trim is shipped loose & mounted after lockers are installed. The trim will create sturdy & cleanly finished side walls.

#### Wall Hooks

Constructed of black powder-coated cast zinc. Four (4) hooks are secured to each locker.

# Construction – Optional Features

## **Coat Hook**

Double hook constructed of black polycarbonate. Hook hangs centered under upper locker. Secured with stainless steel screws.

# **Mesh Box Sides**

Standard locker sides are machined with cross-hatch pattern to provide ventilation for locker contents.

# **Combination Padlock**

Master Lock #1525 combination padlock fits into standard hasp. Double reinforced construction with stainless steel outer case and cold-rolled steel inner case adds strength and durability. Nickel-plated hardened steel shackle resists rust. Two (2) required per locker

# **Coat Rod**

Constructed of 1" diameter stainless steel. Rod is mounted with stainless steel flanges and stainless steel screws. Coat rods will be shipped loose and installed on the job after installation of the lockers.

# **Additional Wall Hooks**

Additional hooks (quantity of 1-3) are secured to the locker.

# Logo

Custom logo is machined into back wall of locker. Logo artwork must be provided to Bradley in one of the following formats "DXF", "DWG", "IGES" or "SAT". Font and the size of the logo are also needed.


# Mirror

4" x 6" Acrylic Mirror with double-sided adhesive tape. Assembled at the job site for placement flexibility.

- Normal use further defined as lockers installed in a climate-controlled environment, away from direct sunlight.
- Dove Stone locker will have white hinge and handle. Starry Night locker will have black hinge and handle.

© 2013 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
Phone: 800.BRADLEY(800.272.3539) Fax: 262.251.5817
bradleycorp.com



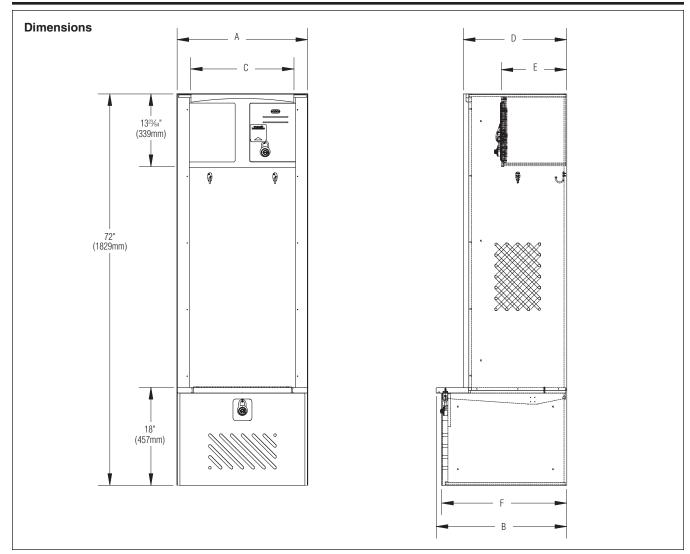

SIZE	А	В	С	D	E	F
24"W x 18"D	24" (610mm)	18" (457mm)	19" (483mm)	13" (330mm)	9.03" (229mm)	17" (432mm)
24"W x 21"D	24" (610mm)	21" (533mm)	19" (483mm)	16" (406mm)	10.53" (267mm)	20" (508mm)
24"W x 24"D	24" (610mm)	24" (610mm)	19" (483mm)	19" (483mm)	12.03" (306mm)	23" (584mm)
30"W x 18"D	30" (762mm)	18" (457mm)	25" (635mm)	13" (330mm)	9.03" (229mm)	17" (432mm)
30"W x 21"D	30" (762mm)	21" (533mm)	25" (635mm)	16" (406mm)	10.53" (267mm)	20" (508mm)
30"W x 24"D	30" (762mm)	24" (610mm)	25" (635mm)	19" (483mm)	12.03" (306mm)	23" (584mm)
36"W x 18"D	36" (914mm)	18" (457mm)	31" (787mm)	13" (330mm)	9.03" (229mm)	17" (432mm)
36"W x 21"D	36" (914mm)	21" (533mm)	31" (787mm)	16" (406mm)	10.53" (267mm)	20" (508mm)
36"W x 24"D	36" (914mm)	24" (610mm)	31" (787mm)	19" (483mm)	12.03" (306mm)	23" (584mm)



# LENOXGEAR Lenox® Gear Locker – Solid Plastic

Medel	Description	Ontional Calcations	Outional Calcations		
Model  □ LENOXGEAR	<b>Description</b> Solid Plastic Gear Locker	Optional Selections			
LENUXGEAR	Solid Plastic Geal Locker	Locker Lock Type:			
Required Selec	ctions (Must Select One from Each Category)	□ PADLOCK	Combination Padlock		
Locker Width (Select One):		Locker Number Plates:			
□ 24-WIDTH	24" Wide Gear Locker	□ NUMBERS	Number Plates		
□ 30-WIDTH	30" Wide Gear Locker		List Sequence		
□ 36-WIDTH	36" Wide Gear Locker	Locker Logos:			
Locker Depth (Selec	•	□ LOGOS	Custom Logo Description		
□ 18-DEPTH	18" Deep Gear Locker	Lasker Oast Hasker			
□ 21-DEPTH	21" Deep Gear Locker	Locker Coat Hooks:	1–3 Double Coat Hook(s) per Locker		
□ 24-DEPTH	24" Deep Gear Locker	COAI-HOOK	Specify Location(s)		
Locker Height:		Laster Ocat Bad			
□ 72-HGT	72" High Gear Locker	Locker Coat Rod:  COAT ROD	Optional Coat Rod		
Locker Color (Select	One):	A A P C 1 W - II II 1 -			
☐ Beige☐ Black	☐ Hunter Green☐ Linen	Additional Wall Hooks:	1–3 Additional Hook(s) per Locker		
□ Bronze	☐ Moss		Specify Location(s)		
☐ Burgundy	☐ Starry Night <sup>†</sup>				
☐ Buttermilk	☐ Toffee				
☐ Canyon Granite	☐ 100% Post-Consumer Charcoal Gray**				
☐ Charcoal Grav	☐ 100% Post-Consumer Toffee**				
☐ Deep Blue	□ 100% Pre-Consumer Black				
☐ Desert Stone	2 100 /6 1 10 Contourner Plack				
☐ Dove Stone <sup>†</sup>					
□ Gray					
Locker Door:					
□ Std-Door	Standard Door – Louvered Vented				
Locker Sides (Select	t One):				
☐ Std-Solid Sides	Solid Locker Sides				
☐ Mesh-Sides	Mesh Locker Sides				

<sup>\*\* 100%</sup> Post-Consumer HDPE may have some minor flaws and the color may be inconsistent.

<sup>†</sup> Dove Stone locker will have white hinge and handle. Starry Night locker will have black hinge and handle.