



FOAMULAR® Tapered Roofing Products

Extruded Polystyrene (XPS) Rigid Foam Insulation

Product Data Sheet



Energy-Saving, Moisture Resistant XPS Insulation

THERMAPINK® 25 Tapered Insulation: ASTM C578 Type IV, 25 psi minimum

FOAMULAR® 400 Tapered Insulation: ASTM C578 Type VI, 40 psi minimum

FOAMULAR® 600 Tapered Insulation: ASTM C578 Type VII, 60 psi minimum

Description

Owens Corning™ FOAMULAR® extruded polystyrene (XPS) tapered roofing insulation products provide performance and value in low slope roofing systems and are designed to be used over structural roof decks. THERMAPINK® tapered roof insulation provides a thermally efficient, moisture-resistant positive drainage slope for use under single-ply or other types of roofing systems.

Tapered roof insulation systems are designed to provide a minimum slope of ¼" per foot, as required by the International

Building Code (IBC), toward roof drains or scupper drains leaving no flat areas for ponding. Other slopes are available and provide additional flexibility for design.

The use of FOAMULAR® tapered roof insulation provides a sustainable roofing solution, helping to prevent ponding and damaging ice buildup in winter, while in summer resisting the growth of fungus and vegetation.

FOAMULAR® tapered roof insulation products are available in three types. Tapered THERMAPINK® 25 (ASTM C578 Type IV) is the most commonly used tapered product, but for applications that require higher compressive strengths, tapered FOAMULAR® 400 (ASTM C578 Type VI) and tapered FOAMULAR® 600 (ASTM C578 Type VII) are available. All FOAMULAR® tapered products are closed cell, moisture-resistant rigid foam boards and are made with Owens Corning's patented Hydrovac® process technology under strict quality control measures. This makes it highly resistant to moisture and permits the product to retain its high R-value year after year even after prolonged exposure to moisture, and freeze/thaw cycling.

Owens Corning provides tapered roofing design services with detailed tapered layouts to describe quantities and how the insulation is to be installed. See your Commercial Area Sales Representative to request tapered roofing services or call 1-800-GET-TECH.

Key Features

- Excellent long-term stable insulating performance at R-5 per inch¹
- Provides positive slope drainage for low slope roofing assemblies
- Exceptional moisture resistance, long-term durability
- Limited lifetime warranty covers all ASTM C578 properties with a 90% R-value retention.²
- The only XPS foam to be GREENGUARD Children & Schools CertifiedSM
- The only XPS foam with certified recycled content—certified by Scientific Certification Systems (SCS) to contain a minimum 20% recycled content
- Will not corrode, rot or support mold growth
- Zero ozone depletion potential with 70% less global warming potential than the previous formula
- Reusable
- Lightweight, durable rigid foam panels are easy to handle and install
- Easy to saw, cut or score

Technical Information

The roof designer must specify the number and location of roof drains as well as the minimum roof slope required for projects using Owens Corning™ THERMAPINK® tapered roof insulation. Please note that Chapter 15 of the IBC requires



FOAMULAR® Tapered Roofing Products

Extruded Polystyrene (XPS) Rigid Foam Insulation

Product Data Sheet

a minimum slope of ¼" per foot for many new construction roofing systems, while requiring only positive slope for reroof systems. Owens Corning™ THERMAPINK® tapered roof insulation is available in ¼" and ⅛" slopes as well as other custom slopes on request.

THERMAPINK® tapered roof insulation has been tested over steel roof decks without a thermal barrier in accordance with UL Standard 1256 and is listed for use direct to deck in accordance with UL Roof Deck Construction #457. If the tapered maximum thickness exceeds that permitted by #457, a thermal barrier may be required. Check local codes for additional requirements. This product is combustible. For additional information, consult MSDS or contact Owens Corning World Headquarters at 1-800-GET-PINK®.

All construction should be evaluated for the necessity to provide vapor retarders. See current ASHRAE Handbook of Fundamentals.

FOAMULAR® insulation can be exposed to the exterior during normal construction cycles. During that time some fading of color may begin due to UV exposure, and, if exposed for extended periods of time, some degradation or "dusting" of the polystyrene surface may begin. It is best if the product is covered within 60 days to minimize degradation. Once covered, the deterioration stops, and damage is limited to

Typical Physical Properties¹

FOAMULAR® Tapered Roof Insulation

Property	Test Method ²	FOAMULAR® Tapered Products		
		Tapered TP25	Tapered F400	Tapered F600
Thermal Resistance ³ , R-Value (180 day) minimum, hr•ft ² •°F/Btu (RSI, °C•m ² /W) @ 75°F (24°C) mean temperature @ 40°F (4.4°C) mean temperature	ASTM C518		5.0 (0.88)	
			5.4 (0.95)	
Compressive Strength ⁴ , minimum psi (kPa)	ASTM D1621	25 (172)	40 (276)	60 (414)
Flexural Strength ⁵ , minimum psi (kPa)	ASTM C203	75 (517)	115 (793)	140 (965)
Water Absorption ⁶ , maximum % by volume	ASTM C272	0.10	0.05	0.05
Water Vapor Permeance ⁷ , maximum perm (ng/Pa•s•m ²)	ASTM E96	1.5 (86)	1.1 (63)	1.1 (63)
Dimensional Stability, maximum % linear change	ASTM D2126		2.0	
Flame Spread ^{8,9}	ASTM E84		5	
Smoke Developed ^{8,9,10}	ASTM E84		45-175	
Oxygen Index ⁸ , minimum % by volume	ASTM D2863		24	
Service Temperature, maximum °F (°C)	—		165 (74)	
Linear Coefficient of Thermal Expansion, in/in/°F (m/m/°C)	ASTM E228		3.5 × 10 ⁻⁵ (6.3 × 10 ⁻⁵)	

- Properties shown are representative values for 1" thick material, unless otherwise specified.
- Modified as required to meet ASTM C578.
- R means the resistance to heat flow; the higher the value, the greater the insulation power. This insulation must be installed properly to get the marked R-value. Follow the manufacturer's instructions carefully. If a manufacturer's fact sheet is not provided with the material shipment, request this and review it carefully. R-values vary depending on many factors including the mean temperature at which the test is conducted, and the age of the sample at the time of testing. Because rigid foam plastic insulation products are not all aged in accordance with the same standards, it is useful to publish comparison R-value data. The R-value for FOAMULAR® XPS insulation is provided from testing at two mean temperatures, 40°F and 75°F, and from two aging (conditioning) techniques, 180 day real-time aged (as mandated by ASTM C578) and a method of accelerated aging sometimes called "Long Term Thermal Resistance" (LTTR) per CAN/ULC S770-03. The R-value at 180 day real-time age and 75°F mean temperature is commonly used to compare products and is the value printed on the product.
- Values at yield or 10% deflection, whichever occurs first.
- Value at yield or 5%, whichever occurs first.
- Data ranges from 0.00 to value shown due to the level of precision of the test method.
- Water vapor permeance decreases as thickness increases.
- This laboratory test is not intended to describe the hazards presented by this material under actual fire conditions.
- Data from Underwriters Laboratories Inc.® classified. See Classification Certificate U-197.
- Smoke Developed is thickness-dependent, therefore a range of values is given.

the thin top surface layers of cells. Cells below are generally unharmed and still useful insulation. It is recommended that all THERMAPINK® tapered roof insulation printed surfaces be turned down to minimize potential sun exposure and localized heat accumulation on the print.

Standards, Codes Compliance

- Meets ASTM C 578 Type IV (TP 25), Type VI (FOAMULAR® 400 insulation), Type VII (FOAMULAR® 600 insulation)

- UL (Underwriters Laboratories) Classified. A copy of UL Classification Certificate U-197 is available at www.foamular.com



- See ICC-ES Evaluation Report ESR-1061 at www.icc-es.org
- THERMAPINK® 25: UL Roof Deck Constructions, tested in accordance with UL 1256, "Standard for Fire Test of Roof Deck Constructions" including Roof Deck Construction #457. FOAMULAR® 400 and 600



FOAMULAR® Tapered Roofing Products

Extruded Polystyrene (XPS) Rigid Foam Insulation

Product Data Sheet

Product and Packaging Data

FOAMULAR® Tapered Roofing Products

Material		Packaging							
Extruded polystyrene closed-cell foam, ASTM C578 Type IV, 25 psi minimum		Shipped in poly-wrapped units with individually wrapped or banded bundles.							
Thickness (in)	Product Dimensions		Pallet (Unit) Dimensions		Square feet per Pallet	Board feet per Pallet	Bundles per Pallet	Pieces per Bundle	Pieces per Pallet
	Thickness (in)	Width (in)	Length (ft)	Height (ft)					
THERMAPINK® 25 and FOAMULAR® 600 Tapered Insulation (FOAMULAR® 400 Tapered Insulation only available in E, F and G panels.)									
1/8 slope A	0.5-0.75	24 x 96	4	8 x 8	4,608	2,880	24	12	288
1/8 slope B	0.75-1	24 x 96	4	8 x 8	3,456	3,024	18	12	216
1/8 slope C	1-1.25	24 x 96	4	8 x 8	2,688	3,024	14	12	168
1/8 slope D	1.25-1.5	24 x 96	4	8 x 8	2,304	3,168	12	12	144
1/4 slope E	0.5-1	24 x 96	4	8 x 8	3,840	2,880	10	12	240
1/4 slope F	1-1.5	24 x 96	4	8 x 8	2,304	2,880	12	12	144
1/2 slope G	0.5-1.5	24 x 96	4	8 x 8	2,688	2,688	14	12	168

1. Available lengths and edge configurations vary by thickness. See www.foamular.com for current offerings. Other sizes may be available upon request. Consult your local Owens Corning representative for availability.

Standard Product Availability

FOAMULAR® Tapered Roofing Products

Panel	THERMAPINK® 25 Taper Insulation	FOAMULAR® 400 Taper Insulation	FOAMULAR® 600 Taper Insulation
1/8 slope A	X		X
1/8 slope B	X		X
1/8 slope C	X		X
1/8 slope D	X		X
1/4 slope E	X	X	X
1/4 slope F	X	X	X
1/2 slope G	X	X	X

were not tested direct to deck and are not included in UL #457 for direct to deck applications.

- Refer to www.ul.com "Certifications" or FM Approval RoofNav for details on listings, constructions and assemblies
 - FM (Factory Mutual) Class I Roof Decks.
 - ASTM E108 Fire Classified Assemblies.
 - ASTM E119 Fire Resistance Rated Roof/Ceiling Assemblies.
 - UL and FM Wind Uplift Rated Assemblies.

- Meets California Quality Standards and HUD UM #71a
- Compliance verification by RADCO (AA-650)

Certifications and Sustainable Features of FOAMULAR® XPS insulation

- FOAMULAR® XPS insulation is reusable
- FOAMULAR® XPS insulation is made with a zero ozone depletion formula
- Certified by Scientific Certification Systems to contain a minimum of 20% pre-consumer recycled polystyrene

- Certified to meet indoor air quality standards under the stringent GREENGUARD Indoor Air Quality Certification ProgramSM, and the GREENGUARD Children & Schools Certification ProgramSM
- Approved under the National Association of Home Builders (NAHB) Research Center Green Seal of Approval
- Utilizing FOAMULAR® XPS insulation can help achieve green building certifications including the U.S. Green Building Council's Leadership in Energy and Environmental Design (LEED®) certification
- FOAMULAR® XPS insulation may qualify for The Buy American provision of the American Recovery and Reinvestment Act (ARRA)



FOAMULAR® Tapered Roofing Products

Extruded Polystyrene (XPS) Rigid Foam Insulation

Product Data Sheet

Environmental and Sustainability

Owens Corning is a worldwide leader in building material systems, insulation and composite solutions, delivering a broad range of high-quality products and services. Owens Corning is committed to driving sustainability by delivering solutions, transforming markets and enhancing lives. More information can be found at www.sustainability.owenscorning.com.

Warranty

FOAMULAR® XPS insulation is warranted to maintain 90% of its R-value and to retain all other properties defined in ASTM C578 for the lifetime of the building. See the actual warranty for complete details, limitations and requirements at www.foamular.com or www.owenscorningcommercial.com.

Notes


1. R means the resistance to heat flow; the higher the R-value, the greater the insulating power.
2. See actual warranty for complete details, limitations and requirements.

All products described here may not be available in all geographic markets. Consult your local sales office representative for more information.

For more information on the Owens Corning family of building products, contact your Owens Corning dealer, call 1-800-GET-PINK®, or access www.foamular.com and www.owenscorning.com.


Typical Tapered Roofing Section 1/8" per foot slope

Utilizes four tapered panel sizes, A, B, C and D panel

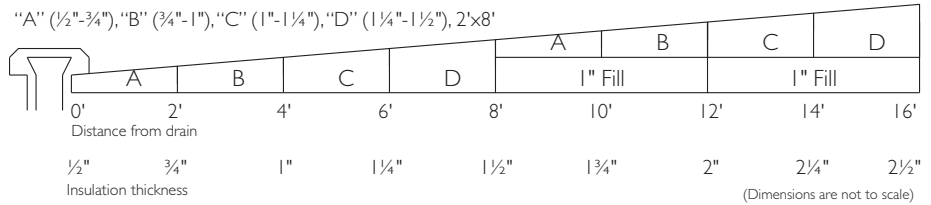


Typical Tapered Roofing Section 1/4" per foot slope

Utilizes two tapered panel sizes, E and F panel

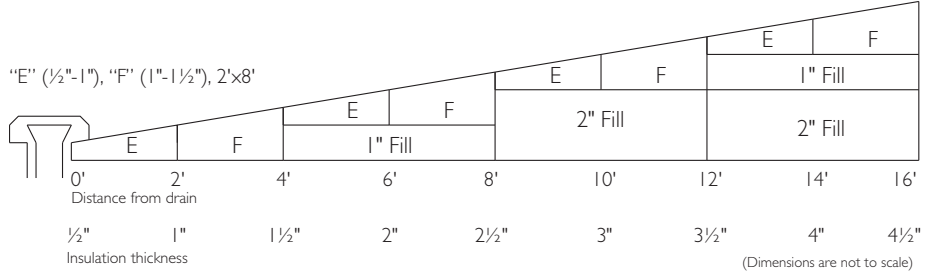

Typical Tapered Roofing Section 1/2" per foot slope

Utilizes one tapered panel size, G panel

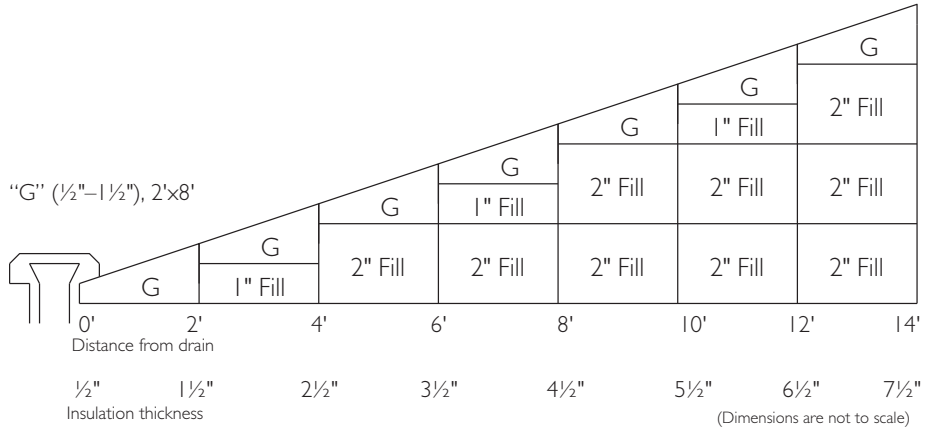

System Average R-Value



Distance from Drain	0'-4'	0'-8'	0'-12'	0'-16'	0'-20'
Average R-value ¹ 1/8" slope	3.75	5.00	6.25	7.50	8.75
1/4" slope	5.00	7.50	10.00	12.50	15.00
1/2" slope	7.50	12.50	17.50	22.50	27.50

1. Average R-value @ 75°F (24°C) mean temperature

Product Data Sheet

Typical Tapered Layouts

Cricket and saddle material are included in the design package for field fabrication.

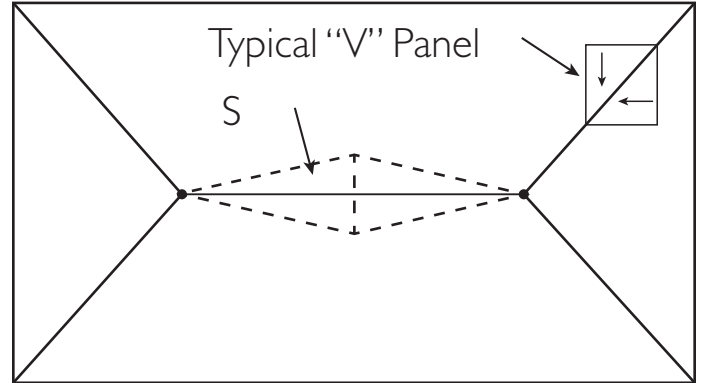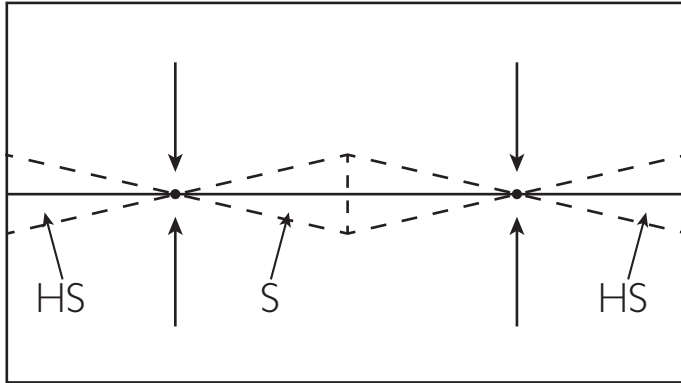


1. Two-Directional Taper System

Utilizes tapered panels installed in two directions, accompanied with saddles ("S") between the drains, and half saddles ("HS") between drains and outside walls. The saddles assist in directing the water flow to the drains.


2. Modified Two-Directional Taper System

Utilizes tapered panels installed primarily in two directions with saddle ("S") placed between the drains; however, two of the four sides utilize mitered valleys. This system is desirable when a constant thickness of insulation is required at the outside perimeter of the roof.

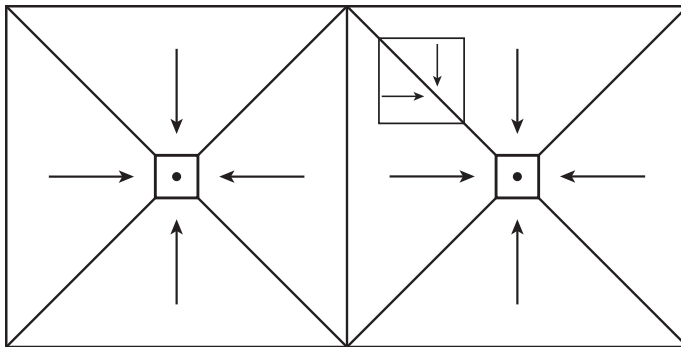

3. Four-Directional Taper System

This system utilizes tapered panels installed in four different directions. Mitered valleys lead to drains.

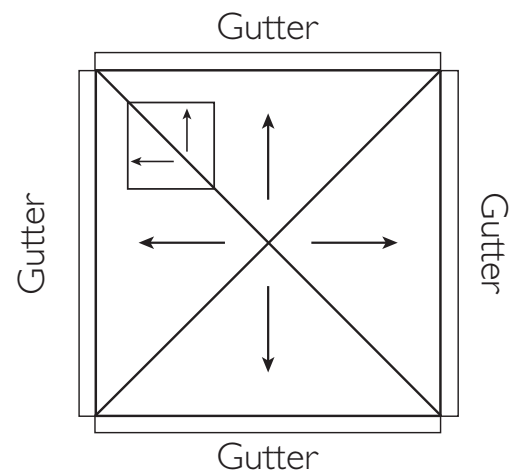

4. Four-Directional Taper System—Perimeter Drainage

Utilizes a four-way taper system directing the water flow to the outside perimeter. This system may be selected when gutters are employed rather than roof drains. Desired drainage is obtained with the creation of hip miters.



FOAMULAR® Tapered Roofing Products Extruded Polystyrene (XPS) Rigid Foam Insulation

Product Data Sheet

Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein. Nothing contained in this bulletin shall be considered a recommendation.

The GREENGUARD INDOOR AIR QUALITY CERTIFIED mark is registered certification mark used under license through the GREENGUARD Environmental Institute.

This NAHB Research Center Green Approved mark is your assurance that a product is eligible for points toward National Green Building Certification. Visit www.GreenApprovedProducts.com for details.

LEED is a registered trademark of the U.S. Green Building Council.



OWENS CORNING FOAM INSULATION, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO 43659
1-800-GET-PINK®
www.owenscorning.com

Pub. No. 10015849. Printed in U.S.A. November 2011. THE PINK PANTHER™&©1964-2011 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. ©2011 Owens Corning.

