


Typical Glass Performance for Standard Four Side Glazing Using Recommended Conditions.

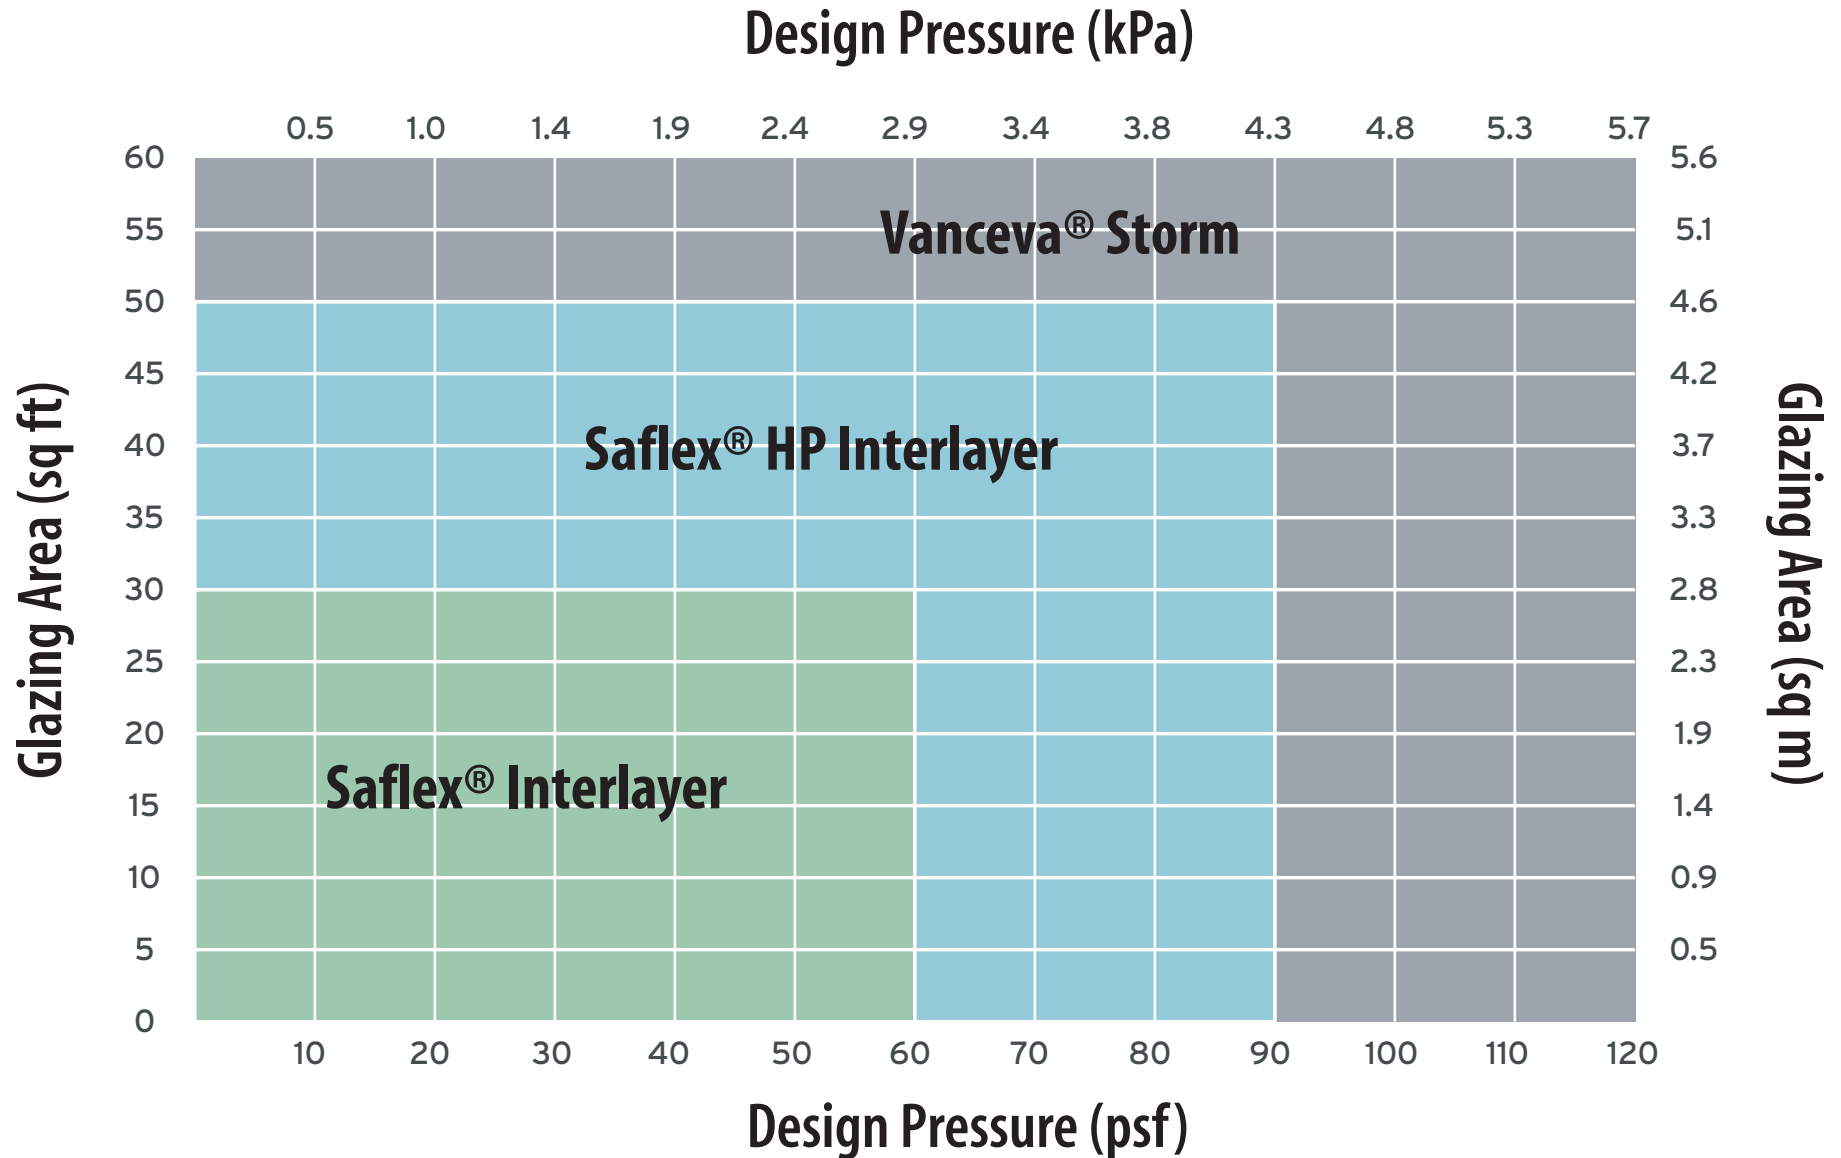

Note: Experienced product performance. Based on panels glazed with structural silicone, minimum 12 mm (1/2 in) glass bite; standard test temperatures 15 - 35 degrees C (59 - 95 degrees F). Not guaranteed for all samples.