

TITE-LOC

PRODUCT FEATURES

- 20 year non-prorated finish warranty
- Available in 4 variations - see profile drawings to right. Check local factory for panel condition availability.
- Maximum panel length of 64' - check local factory for longer lengths
- Mechanically seamed in the field to 90 degree lock
- Weathertightness warranty available
- Labor savings seamer can travel downslope and upslope, max 6:12 pitch

MATERIAL

- 37 stocked colors (24 gauge steel)
- 13 stocked colors (22 gauge steel)
- 36 stocked colors (.032 aluminum)
- 20 stocked colors (.040 aluminum)
- Galvalume Plus available


*24 ga. and 22 ga. steel panels and .032 and .040 aluminum panels are UL-90 classified over solid substrate. See roof deck construction in Underwriter Laboratories roofing materials and systems directory.

UL CLASSIFICATION





- UL-580 Class 90 rated up to 18" O.C.
- UL-1897 wind uplift
- UL-790 Class A fire rated
- UL-263 fire resistance rated
- UL-2218 impact resistance rated

ASTM TESTS

- ASTM E 1592 tested
- ASTM E 331/1646 tested
- ASTM E 283/1680 tested

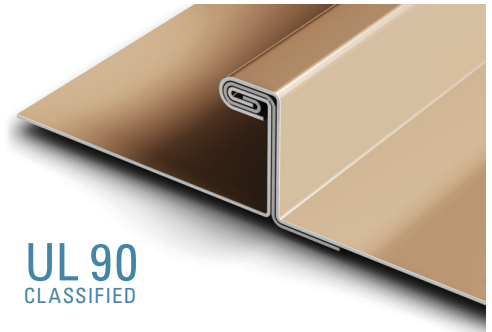

UL 90
CLASSIFIED

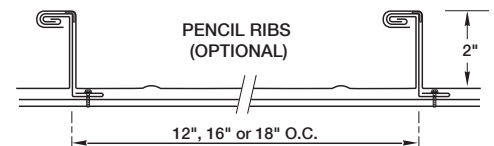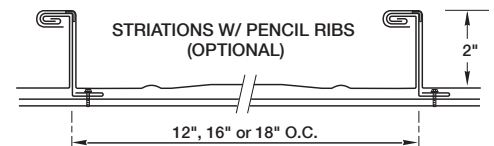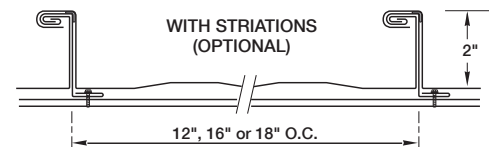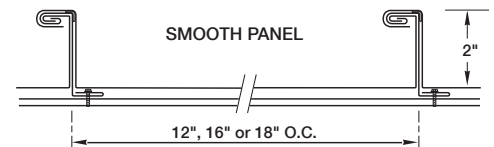

SPECS: 12", 16" OR 18" O.C.

2" HIGH

Note: Panel conditions vary by manufacturing facility. Please check local plant for availability.

