

# TITE-LOC PLUS

## PRODUCT FEATURES

- 20 year non-prorated finish warranty
- Available in 4 variations - see profile drawings to right. Check local factory for panel condition availability.
- Maximum panel length of 64' - check local factory for longer lengths
- Mechanically seamed in the field to 180 degrees
- Weathertightness Warranty Available

## MATERIALS

- 37 stocked colors (24 gauge steel)
- 13 stocked colors (22 gauge steel)
- 36 stocked colors (.032 aluminum)
- 20 stocked colors (.040 aluminum)
- Galvalume Plus available

## UL CLASSIFICATION

- UL-580 Class 90 rated up to 18" O.C.
- UL-1897 wind uplift
- UL-790 Class A fire rated
- UL-263 fire resistance rated
- UL-2218 impact resistance rated

## ASTM TESTS

- ASTM E1592
- ASTM E331/1646
- ASTM E283/1680

\*24 ga. and 22 ga. steel panels and .032 and .040 aluminum panels are UL-90 classified over solid substrate. See roof deck construction in Underwriter Laboratories roofing materials and systems directory.

## FLORIDA BUILDING PRODUCT APPROVALS


- 24 GA & .032 Aluminum (Open Purlins): FL Prod. Approv 5562-R4
- .040 Aluminum: FL Approv 10879-R1
- 24 GA & .032 Aluminum: FL Prod Approv. 13487-R2
- 24 GA & .032 Aluminum: FL Prod. Approv. 16142

## MIAMI-DADE PRODUCT APPROVALS





- .032 Aluminum (Plywood Deck): NOA No. 12-0921.11
- 24 GA Steel (Plywood Deck): NOA No. 12-0829.08
- .032 Aluminum (Steel Deck): NOA No. 12-1011.17
- 24 GA Steel (Steel Deck) NOA No. 12-0710.05

## TESTS

- 24 ga. Steel SSTD Missile Impact Tested - Passed
- .032 Aluminum SSTD Missile Impact Tested - Passed

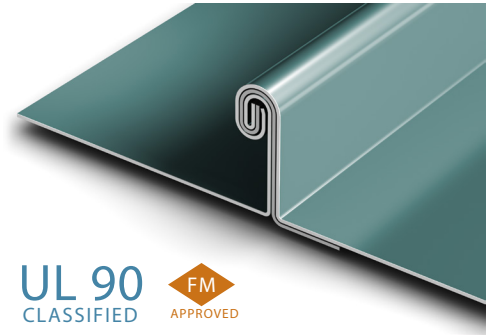

UL 90  
CLASSIFIED

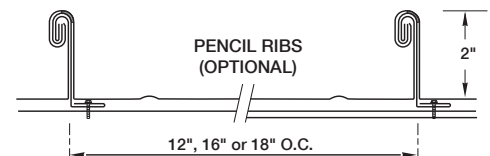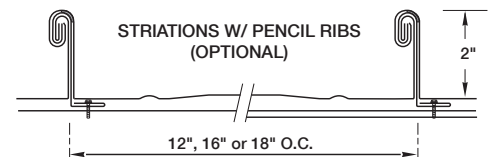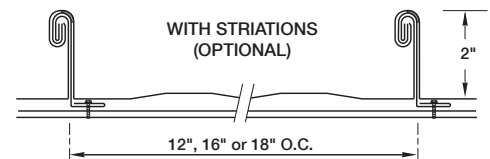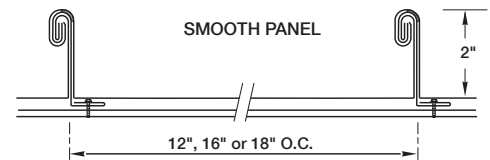

SPECS: 12", 16" OR 18" O.C.  
2" HIGH

Note: Panel conditions vary by manufacturing facility. Please check local plant for availability.



www.pac-clad.com | 800-PAC-CLAD

©2012 Petersen Aluminum Corporation