

# INTEGRAL BATTEN

## PRODUCT FEATURES

- Ideal for transition roofs
- Herr-Voss corrective leveled
- Stiffener beads available
- 20 year non-prorated finish warranty
- Maximum panel length of 45 feet

## MATERIAL

- 37 stocked colors (24 gauge steel)
- 36 stocked colors (.032 aluminum)
- Smooth & stucco available
- Galvalume Plus available


## UL CLASSIFICATION

- UL-580 Class 90 rated over solid substrate (steel only)
- UL-790 Class A fire rated
- UL-263 fire resistance rated


## ASTM TESTS

- ASTM E283/1680 tested
- ASTM E331/1646 tested

\*11" and 18" O.C. 24 ga. steel Integral Batten panels are UL-90 Classified over solid substrate. See roof deck construction in Underwriter Laboratories roofing materials and systems directory.

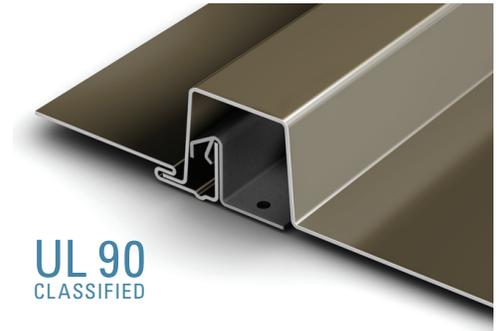

**UL 90**  
CLASSIFIED

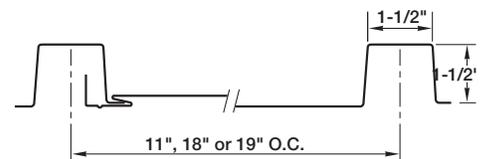

SPECS: 11", 18" OR 19" O.C.  
1-1/2" HIGH



www.pac-clad.com | 800-PAC-CLAD

©2008-2009 Petersen Aluminum Corporation