

PAC-TITE WT FASCIA

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

PRODUCT FEATURES

- Unmatched uplift protection in roof edge applications
- Ability to use heavier gauges for smaller face sizes
- Concealed splice plates allow for cleaner design
- Meets stringent performance requirements
- Non-penetrating design eliminates need for stripping in/heat welding
- Superior watertight integrity of the installation
- Extruded aluminum anchor bar securely terminates the membrane
- Extensively tested to exceed industry standards
- Pre-punched holes for precise fastener placement and quick installation
- Slotted holes allow for thermal movement
- Includes anchor bar EPDM splice plates and required fasteners
- Lifetime, 170 mph wind warranty available
- Wide variety of colors and finishes
- Convenient 12' Lengths
- Custom and radius capabilities available
- Reusable and recyclable for reinstallation

MATERIALS

- 29 Stocked PAC-CLAD Finishes – .050 Aluminum
- 6 Stocked PAC-CLAD Finishes – .063 Aluminum
- Mill Finish Aluminum – .050 & .063 Aluminum
- Clear and Colored Anodized – .050 & .063 Aluminum

ACCESSORIES


- Miters – 90 Degrees and Non-90 Degrees
- Scuppers – Downspout, Spillout and Overflow
- Drainage Components

TESTING

- ANSI/SPRI ES-1 Standard to comply with the International Building Code

WARRANTY

A Lifetime 170 mph warranty is available. It covers replacement or repair of any portion of the roof edge system that has failed due to a defect in the supplied materials. The warranty covers the roof edge for the lifetime of the roof on which it was originally installed.

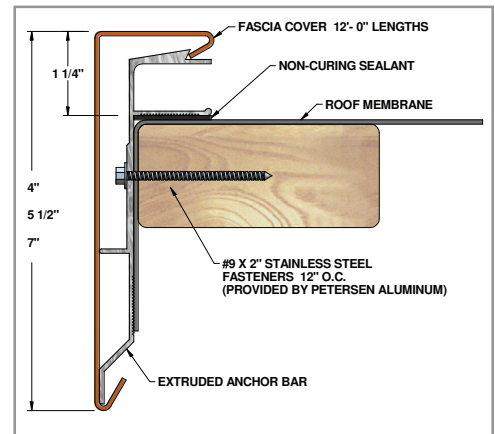

SIZES

Face Heights	Nailer Coverage
4"	1 Nailers
5 1/2"	2 Nailers
7"	3 Nailers

