



International Building Code Adds Photoluminescent Exit Path Markings

Effective January 1, 2009

All New and Existing High Rise Buildings


The International Council of Code Officials adopted into the 2009 International Building Code, Section 1024, a requirement that all non-residential buildings, new and existing, over 75 feet in height must install Photoluminescent Exit Path Markings in all enclosed emergency stairwells. Other code requirements are:

- NFPA 101 and 5000 Section 7.2.2.5.5. Exit Stair Path Markings All Buildings Effective January 2009
- State of California Building Code, Chapter 10, Means of Egress requires in Group A, E, I, R-1, R-2 and R-3 Occupancies, in Exit corridors leading to Emergency Exit stairwells Effective January 2008
- State of Connecticut requires in Group A, B, E, I-1, I-2, R-1 and R-2 occupancies, in Exit corridors leading to Emergency Exit stairwells Effective January 2008.
- New York City Building Code Reference Standard RS 6-1 requires in all enclosed Emergency Exit stairwells Effective July 2008 – All Non-Residential Structures.
- General Services Administration requires Photoluminescent Exit Path Markings in all new and existing buildings Effective January 2009

To schedule a free, no obligation estimate call 1-800-767-0082

Balco's list of satisfied customers includes buildings and venues all over the USA. We look forward to adding your buildings to our satisfied customer list.

PL Exit Path Markings Supported By:

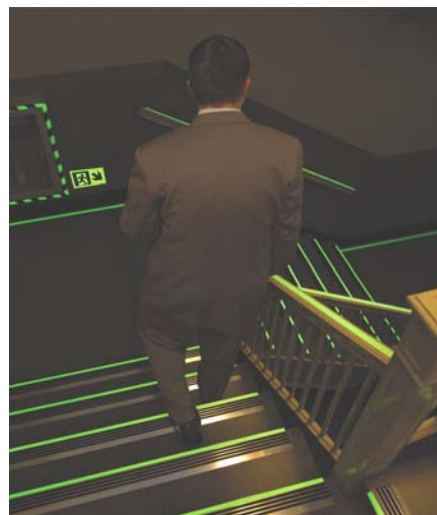

Final reports of the Federal Building and Fire Investigation of the World Trade Center Disaster, NIST recommends that egress systems be designed with consistent layouts, standardized signage and guidance so that systems becomes intuitive and obvious to building occupants during evacuations.

Balco, Inc., 2626 S Sheridan, Wichita, KS, USA, phone 316.945.9328, fax 316.945.0789, toll free 800.767.0082
e-mail: info@balcousa.com www.balcousa.com