

PRODUCT DESIGNATION

RR, Roof-to-Roof
Silicone Roof Joint Covers

MANUFACTURER

Michael Rizza Company™
A Division of Balco Inc.
2626 S. Sheridan
Wichita, Kansas 67214
(316) 945-9328 (phone)
(316) 945-0789 (fax)
(800) 767-0082 (toll free)

PRODUCT DESCRIPTION

Silicone roof seal joint cover system for installation in exterior joints between parallel roof sections, the system consisting of aluminum extrusions, Silicone seals, and elastomeric back seals. The joint cover system is mechanically fastened to the roof. The joint cover system is designed to provide a waterproof seal and is also designed so that the roof seal is bellowed.

SIZE

Standard systems are available for joints 2" design width through 12" design width. For wider joints, please contact the factory.

ELASTOMERIC INSERT COLOR

Available in standard colors: black, gray, bronze, or natural stone. Contact the factory for custom colors.

MOVEMENT CAPABILITIES

The system permits unrestrained movement of the joint without disengagement of the cover. Conforms to the requirements of ASTM E 1399. Available in systems for 100% expansion contraction.

FIRE RESISTANCE

System may be used in conjunction with **Metaflex 2000 Fire Barrier** to achieve a fire resistance rating of 2 hours. Fire resistance testing was in accordance with ASTM E1966 and/or UL 2079.

System may be used in conjunction with **MetaMat Fire Barrier**, up to 6" maximum open joint width, to achieve a fire resistance rating of 2 hours. Fire resistance testing was in accordance with UL 2079.

System may be used in conjunction with **MetaBlock Fire Barrier**, up to 4" maximum open joint width, to achieve a fire resistance rating of 2 hours. Fire resistance testing was in accordance with UL 2079.

MOISTURE RESISTANCE

Available with elastomeric back seal attached to aluminum base members. This membrane seal is designed to provide moisture resistance to the system.

BASIC USES

For use in commercial construction for wall and ceiling application.

- Exterior expansion joints
- Exterior seismic joints

ADVANTAGES

- Easy to install base members
- Easy to assemble joint cover
- Standard Fasteners provided with the joint cover by the factory
- Available in several standard colors as well as custom colors
- Inhibits moisture penetration
- Seals available in long lengths to minimize splicing
- Seals are flush with the wall
- Easy to clean and maintain

LIMITATIONS

- Not recommended for conditions in which significant lateral shear movement is anticipated.

TECHNICAL DATA

Systems in the Series conform to the requirements of ASTM E 1399 for specified movement capabilities

LEED

Refer to the appropriate Balco, Inc. LEED Statement for the applicable LEED Rating System for information regarding LEED credits for which this Balco, Inc. Joint Cover System does or may qualify or contribute.

INSTALLATION

1. Mark the locations for the anchor holes on the base members. Drill the anchor holes into the base members at the marked locations.
2. Place the base members into their installed positions against the roof. Using the base members as templates, mark the anchor hole locations on the roof.
3. Remove the base members from their installed position against the roof, and drill the anchor holes into the roof at the marked locations.
4. Place the base members back into their installed positions onto the roof. Attach the joint system base members to the roof using the fasteners provided by the factory.
5. Place sealant into the base member channels for the back seal.
6. Install the back seal by pressing the back seal arrows into the base member channels.
7. Install the roof seal(s) by pressing the roof seal arrows into the base member channels.

STORAGE & HANDLING

Expansion and seismic joint cover systems should be stored in a cool, dry place. Keep products stored under protective cover, in their original containers.

AVAILABILITY AND COST

Balco, Inc. Expansion and Seismic Joint Cover Systems are available worldwide through your local Balco, Inc. Sales Representative or directly from the factory. Pricing and standard lead time are available through your local Sales Representative or from the factory.

WARRANTY

Balco, Inc. warrants to its purchasers that all products sold by it will be free from manufacturing and material defects. Any defective product will be replaced or repaired free of any charge, provided a claim is brought to Balco's attention, in writing, within the established warranty period following the date of shipment by us and provided

Balco's examination shows the product has failed under the terms of this warranty. The established warranty period for architectural joint cover systems is one (1) year. Balco, Inc. will not be responsible for installation costs involved in such repair or replacement. Balco, Inc. shall have no obligation under this warranty if owner subjects materials to improper conditions. This is in lieu of all other warranties, expressed or implied, and is the sole warranty extended by Balco, Inc. Balco, Inc. liability under this warranty is limited to repair or replacement and does not include any responsibility for

consequential or other damage of any nature. It is further agreed and understood that the price stated for the seller's products is consideration for the limitation of seller's liability hereunder.

MAINTENANCE

Establish an inspection schedule for the expansion joint covers. Clean dry contaminants away by wiping with a clean, damp cloth. Clean seals using clean cloths, warm water and a gentle detergent (mild dishwashing detergents are acceptable). To remove tough stains, use isopropyl alcohol and clean cloths. Do not use abrasive cleaners.

TECHNICAL SERVICES

Technical services are available from Balco, Inc. and from your local Balco, Inc. Sales Representative.

BALCO, INC.

Phone: (316) 945-9328

Fax: (316) 945-0789

Toll Free: (800) 767-0082


FILING SYSTEM

ARCAT Specifications

Reed Construction Data

Sweets™

4specs.com

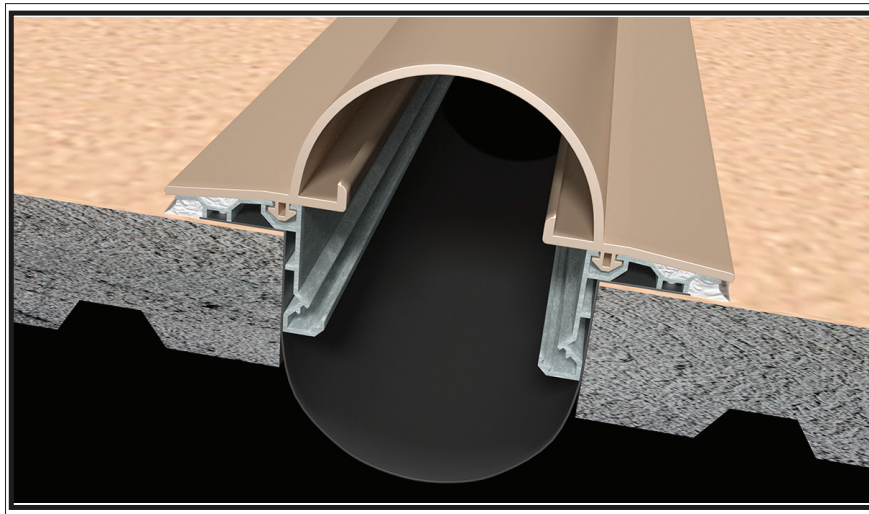

Type	Joint Dimension	Height Dimension
RR-2	2 inches (51 mm)	2 5/8 inches (66 mm)
RR-3	3 inches (76 mm)	3 5/8 inches (90 mm)
RR-4	4 inches (102 mm)	4 5/8 inches (116 mm)
RR-5	5 inches (127 mm)	5 5/8 inches (143 mm)
RR-6	6 inches (152 mm)	6 5/8 inches (166 mm)
RR-7	7 inches (178 mm)	7 5/8 inches (194 mm)
RR-8	8 inches (203 mm)	8 5/8 inches (219 mm)
RR-9	9 inches (228 mm)	9 5/8 inches (244 mm)
RR-10	10 inches (254 mm)	10 5/8 inches (270 mm)
RR-11	11 inches (280 mm)	11 5/8 inches (295 mm)
RR-12	12 inches (305 mm)	12 5/8 inches (320 mm)