



BOSTIK® CERAMIC TILE & STONE INSTALLATION PRODUCTS

WATERPROOFING & CRACK ISOLATION

SURFACE PREPARATION

THIN SET MORTARS

ADMIXTURES

MASTICS

GROUTS

SPECIALTY





As a global leader in adhesives, coatings and sealant technologies, Bostik continuously strives to commercialize products that minimize environmental impact and promote the health and well being of our customers. Bostik shall demonstrate these objectives by achieving compliance with the most rigorous standards set forth by industry recognized green building authorities.

Many of the products featured in this catalog are LEED® compliant. For a complete list of Bostik Construction Products that could contribute to LEED® credits, email us at contactus@bostik-us.com, Subject: VOC Product Portfolio or visit us at www.greenmission.bostik-us.com.




Each product displaying Bostik's Blockade™ antimicrobial protection logo contains an agent which inhibits the growth of bacteria, mold, or mildew on the surface of the dried adhesive/membrane; the dried adhesive/membrane resists stains caused by mold. To obtain specific test information by product, please contact Bostik's Technical Service Department at 1-800-726-7845.



Stronger Bonds, Better Life



Bostik® Brand Products are recognized for high quality, high performance results when installing all types of ceramic tile and natural stone. We always have the products you need, and our warranty protects you and your reputation.





| Product Name | Description | Tile Types | Substrates | Specification | Page |
|--|---|------------|-----------------------|----------------------------------|-------|
| SURFACE PREPARATION SYSTEMS | | | | | |
| Bostik® GoldPlus™ | Waterproofing & Crack Isolation Membrane | N/A | 1,2,3,4,5,9 | A118.10 & A118.12 | 2-4 |
| Ultra-Set® Advanced | Waterproofing & Crack Isolation Membrane | ABCDEFGH | 1,2,3,4,5,6,7,8,9 | A118.10 & A118.12 | 2 |
| Black-Top™ | Waterproofing & Crack Isolation Membrane | N/A | 1,2,3,4,5,6,7,9 | A118.10 & A118.12 | 3 |
| Bostik® UltraFinish™ | Fast Setting Feather up to 1" | N/A | 1,2,4,5,6,7,9 | N/A | 3 |
| SL-150™ | Self-Leveling Underlayment | N/A | 1,2,4,5,7,9 | — | 4 |
| Webcrete 95® | Fast Setting Feather to 1/2" | N/A | 1,2,4,5,6,7,9 | — | 4 |
| Bostik® Universal Primer | Primer used with SL-150 | N/A | 1,2,4,5,9 | — | 4 |
| THIN SET MORTARS | | | | | |
| ReFlex® | High Performance, Flexible | ABCDEFGHIJ | 1,2,3,4,5,6,7,9 | A118.4 & A118.11 | 5-8 |
| Single-Flex® F.S. | Fast Setting, Latex Thin Set | ABCDEFGH | 1,2,3,4,5,6,7,9 | A118.4 & A118.11 | 5 |
| StoneWall™ | High Performance & Non-Sag Mortar | ABCDEFGH | 1,2,3,4,5,6,7,9 | A118.4 & A118.11 | 5 |
| Single-Flex® | Premium Multi-Purpose Latex Thin-Set | ABCDEFGH | 1,2,3,4,5,6,7,9 | A118.4 & A118.11 | 6 |
| Big Tile & Stone™ | Premium Latex Medium Bed Mortar | ABCDEFGH | 1,2,3,4,5,6,7,9 | A118.4 & A118.11 | 6 |
| Bostik® PM | General Purpose, Latex Thin Set | ABCDEFGH | 1,2,3,4,5,6,7,9 | A118.4 & A118.11 | 7 |
| Porcelain-Mate™ | Polymer-Modified Thin-Set Mortar | ABCDEFGH | 2,4,9 (1,3,5,6,7,9)** | A118.1 & A118.4 | 7 |
| Tile-Mate® Premium | Premium Portland Cement Thin Set Mortar | ABCDEFGH | 1,2,3,4,5,6,7,9** | A118.1, (A118.4 & A118.11)* | 8 |
| Tile-Mate® Floor & Wall | Portland Cement Thin Set | ABCDEFGH | 1,2,3,4,5,6,7,9 | A118.1, (A118.4 & A118.11)* | 8 |
| Ditra-Set™ | Premium Portland Cement & Medium Bed | ABCDEFGH | 1,2,3,4,5,6,9 | A118.1, (A118.4 & A118.11)* | 8 |
| *Mixed with 425 Multi-Purpose Acrylic Latex Admixture or 447 Flex-A-Lastic. **Mixed with 425 Multi-Purpose Acrylic Latex Admixture. | | | | | |
| ADMIXTURES | | | | | |
| 425 Multi-Purpose Acrylic Latex Admixture | For Cement, Grout, Thin Set, Mortar beds & Priming | ABCDEFGH | 1,2,3,4,5,6,7,9 | A118.4, A118.6, A118.7 & A118.11 | 9 |
| 447 Flex-A-Lastic® Flexible Mortar Admixture | High Performance Flexible Admixture for Tile-Mate Thin Sets | ABCDEFGH | 1,2,3,4,5,6,7,9 | A118.4 & A118.11 | 9 |
| MASTICS (ORGANIC ADHESIVES) | | | | | |
| Bostik® D-2001 | Interior Applications, Walls, Ceilings, Floors & Countertops | ABCDFH | 1,2,3,4,5,9 | A136.1 Type I & II | 9 |
| Ultra-Premium Mastic | Interior Applications, Walls, Ceilings, Floors & Countertops | ABCDF | 1,2,3,4,5,9 | A136.1 Type I & II | 9 |
| Bostik® Multi-Purpose Mastic | Interior Applications, Walls, Ceilings, Floors & Countertops | ABCDF | 1,2,3,4,5,9 | A136.1 Type I & II | 9 |
| Bostik® Professional Grade Mastic | Interior Applications, Walls, Ceilings, Floors & Countertops | ABCDF | 1,2,3,4,5,9 | A136.1 Type I & II | 9 |
| GROUTS | | | | | |
| Ceramic Tile Grout (sanded) | Portland Cement Grout 1/8" to 1 1/2" | ABCDEFGHJI | N/A | A118.6 & A118.7** | 10-11 |
| Dry Tile Grout (unsanded) | Portland Cement Grout 1/8" or less | ABCDEFGHJI | N/A | A118.6 & A118.7** | 10 |
| 1900 Modified Epoxy | Stain Resistant, Modified Epoxy | ABCDEFGHJI | 1,2,4,5,6,7,9 | A118.8 | 10 |
| EzPoxy™ | 100% Solids Epoxy Grout & Mortar | ABCDEFGHJI | N/A | A118.3 | 11 |
| Dimension™ | Reflective Premixed Grout | ABCDEFGHJI | N/A | A118.3 | 11 |
| TruColor™ | Premixed Grout | ABCDEFGHJI | N/A | A118.3 | 11 |
| **Mixed with 425 Multi-Purpose Acrylic Latex Admixture. | | | | | |
| SPECIALTY PRODUCTS | | | | | |
| Blaze® | Urethane Grout Haze/General Purpose Cleaner | ABCDEFGH | N/A | — | 12 |
| Tub & Tile Caulk | Interior Latex Caulk | — | — | — | 12 |
| Pure Silicone Caulk | Interior/Exterior Waterproof Temperature & Chemical Resistant Caulk | — | — | — | 12 |

TILE TYPES

- A Non-Vitreous
- B Semi-Vitreous
- C Vitreous
- D Impervious/Porcelain
- E White Translucent Marbles

- F Granite, Stable Stones, Slate
- G Moisture Sensitive Stone (i.e. Russo LeVanto and Nero Marquina Marble or Green Marble and their Agglomerates)


- H Large Ceramic Tile, Stable Stone and Granite
- I Resin Backed Stone
- J Glass Tiles

SUBSTRATES

- 1 Plywood
- 2 Concrete
- 3 Gypsum Wallboard
- 4 Cementitious Backer Units
- 5 Properly Prepared Ceramic Tile
- 6 Properly Prepared Vinyl/ VCT Tile
- 7 Cutback Residue (interior, dry only)
- 8 Clean Steel
- 9 Approved Waterproofing Membranes



Waterproofing Membrane

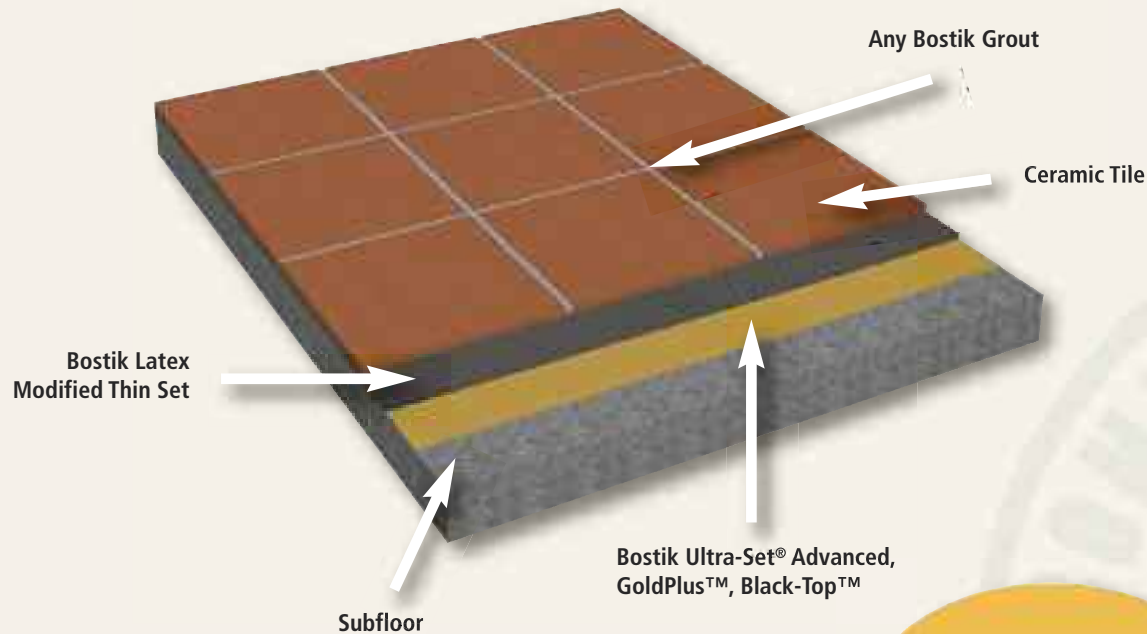

**NEW IMPROVED
ROLLER-APPLIED
FORMULATION**



BOSTIK[®] GOLDPLUS[™]

WATERPROOFING & CRACK ISOLATION MEMBRANE

Bostik GoldPlus[™] is a ready-to-use, roller-applied, latex waterproofing and anti-fracture membrane for use beneath thin set ceramic tile installations on vertical and horizontal surfaces. GoldPlus exceeds the requirements of ANSI A118.10 (specification for waterproof membranes beneath thin set tile and stone) and ANSI A118.12 (specification for crack isolation membranes).

Use Bostik GoldPlus in commercial or residential applications. Apply over concrete, cement block walls, cement backer board, exterior grade plywood (interior, dry installations only) and mortar beds.

Available in 3.5 gallon and 1 gallon containers.

- Dries in 1 hour
- 24 hour flood test

VOC: 38.5 g/L



| Item # | Size | Barcode # |
|------------|--------------------|--------------|
| G07800-RGC | 3.5 gallon pail | 747224077004 |
| G07800-RG1 | 4 x 1 gallon pails | 747224077011 |

ULTRA-SET® ADVANCED



WATERPROOFING, CRACK & SOUND ISOLATION MEMBRANE

Ultra-Set Advanced is a tenacious, one-part, trowel applied, elastomeric waterproofing/crack/sound isolation membrane and setting adhesive. Use Ultra-Set Advanced as a waterproofing, crack, and sound isolation membrane over properly prepared concrete; structurally-sound, exterior grade plywood (interior/dry use only); cementitious backer board; and existing, well-bonded vinyl/VCT or ceramic tile; prior to the installation of ceramic or stone tile. Ultra-Set Advanced may be used on gypsum based underlayment in dry, above grade installations with minimum compressive strengths of 2,000 psi.

Exceeds the requirement of ANSI A118.10 & A118.12

Available in 5 gallon & 2 gallon pails and 30 oz. sausages. VOC: 134 g/L

| Item # | Size | Barcode # |
|------------|------------------|--------------|
| G60800-5G | 5 gallon pail | 747224608055 |
| G60800-UA2 | 2 gallon pail | 747224608024 |
| A60830 | 16-4 x 1 sausage | 747224608000 |

BLACK-TOP™

WATERPROOFING AND CRACK ISOLATION MEMBRANE

A liquid applied, fabric-reinforced waterproofing and crack isolation membrane. Black-Top may be used for both heavy duty and residential applications.

Use in commercial kitchens, pools, showers, fountains, spas, hospitals, schools, malls, airports, etc.

Applies as easy as paint. Dries in 2-4 hours. Minimal thickness does not add elevation.


Exceeds the requirements of ANSI A118.10 & A118.12.

Available in 6 gallon containers.


VOC: 31 g/L

| Item # | Size | Barcode # |
|--------|----------------------|--------------|
| G91026 | 6 gallon | 747224910264 |
| G91028 | 3' x 84' Fabric Roll | 747224910287 |

As a Crack Isolation Membrane

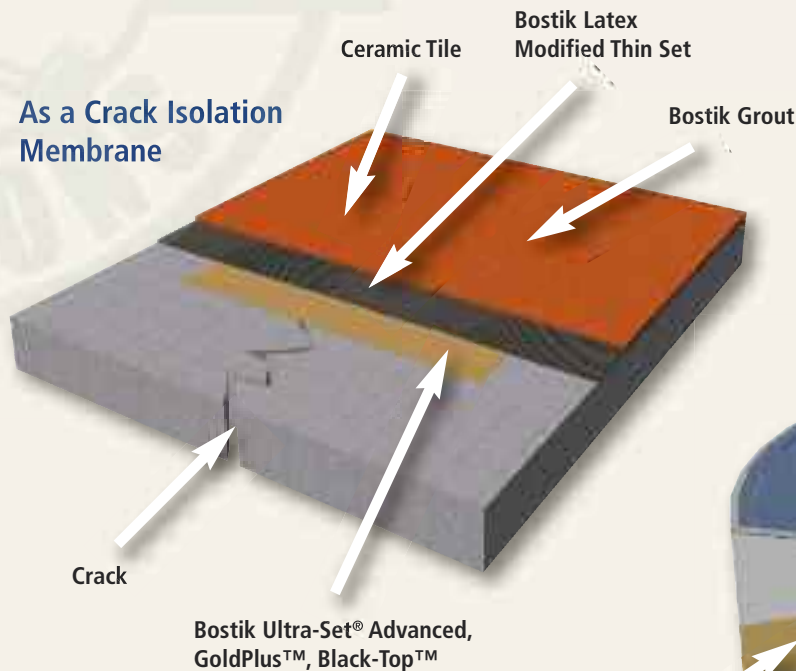

Shower Drain Detail with Standard Cement Prefloat

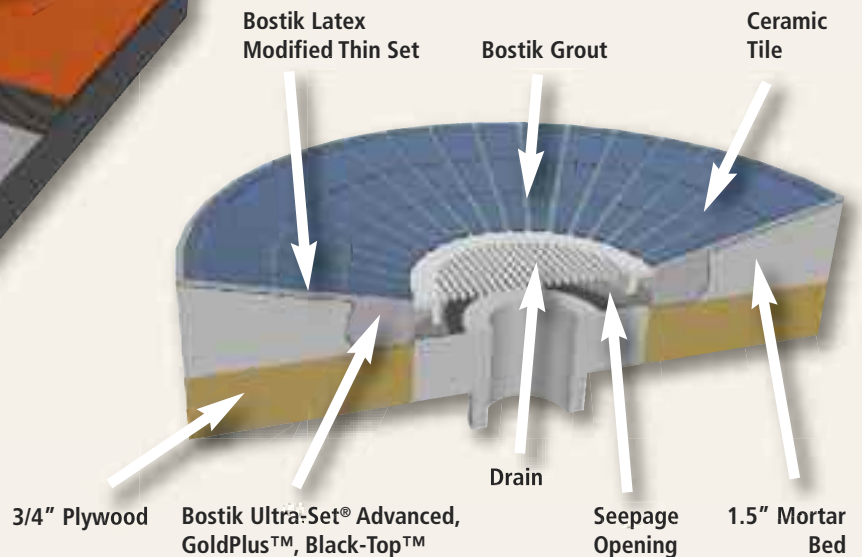



BOSTIK® ULTRAFINISH™

PREMIUM PORTLAND CEMENT PATCH

UltraFinish is a fast-setting, latex-fortified, Portland cement-based patch for interior use. This product may be used to skim coat or feather-edge up to 1" deep in one application. Floor covering can be installed typically in as little as 15-20 minutes over concrete, wood, ceramic, and quarry tile without the requirement of priming or the use of a liquid additive.

When mixed with Bostik® 425 Multi-Purpose Acrylic Admixture instead of water, UltraFinish can be used as an embossing leveler.

- Excellent for skim coating, patching or leveling
- Feather-edge up to 1 inch deep
- May be used over properly prepared cutback and other non-water soluble adhesives over concrete
- May be used as an embossing leveler with Bostik® 425 Multi-Purpose Acrylic Admixture

Available in 4 x 10 lb. bags.

VOC: 0 g/L



| Item # | Size | Barcode # |
|--------|---------------|-------------------|
| G00130 | 4 x 10 lb bag | each 747224001306 |

SL-150™

SELF LEVELING UNDERLAYMENT



SL-150 is a high compressive strength, self-leveling, cement-based underlayment used to repair, smooth and level concrete as well as existing ceramic, terrazzo or approved plywood sub-floors prior to the installation of carpet, vinyl, VCT, laminate, solid and engineered hardwood flooring, ceramic or natural stone. SL-150 is suitable for thickness from featheredge to 1" thick; or up to 5" thick when mixed as designed with pea gravel. Use on, above or below grade. Use SL-150 in smaller installations where it may be mixed by hand; or use underlayment pump to quickly cover large jobs. Mix with water. Prime all surfaces with Bostik Universal Primer.

Available in 50 lb. bags. VOC: 0 g/L

| Item # | Size | Barcode # |
|--------|-----------|--------------|
| G00270 | 50 lb bag | 747224002709 |

WEBCRETE 95®

PORTLAND CEMENT PATCH



Webcrete 95 is a fast setting, high performance, polymer-modified cement-based patch used to repair holes, cracks, and uneven surfaces from feather edge to 1/2" thick. Mix with water.

Mix with 425 Admixture instead of water for improved performance and flexibility.

Available in 25 lb. bags & 40 lb. pails. VOC: 0 g/L

| Item # | Size | Barcode # |
|--------|------------|--------------|
| D63168 | 25 lb bag | 747224631688 |
| D63170 | 40 lb pail | 747224631701 |

UNIVERSAL PRIMER

PRIMER FOR SL-150™



Universal Primer is used to prime substrates prior to the use of Bostik SL-150 Self Leveling Underlayment. Use Universal Primer over concrete, approved plywood substrates; cement backer board, existing ceramic tile, marble, granite, and terrazzo or cut back adhesive residues.

Available in 4 x 1 gallon containers.

VOC: 15 g/L

| Item # | Size | Barcode # | Case Barcode # |
|--------|---------------|-------------------|---------------------|
| G63116 | 4 x 1 gallons | each 747224631169 | case 10747224631166 |



REFLEX®



HIGH PERFORMANCE FLEXIBLE MORTAR
(718 white/918 gray)

Use ReFlex for the toughest residential and commercial applications, deflection up to L/240, difficult tile such as porcelain, or for any job that requires an extremely high performance thin-set.

ReFlex is suitable for setting porcelain, glass, ceramic and stone tile in both interior and exterior applications. ReFlex is recommended for installing tile over plywood, backer board and approved waterproofing/crack isolation membranes and existing ceramic and vinyl flooring. Mix with water only.

Available in 50 lb. bags.

VOC: 0 g/L

| Item # | Size | Color | Barcode # |
|------------|-----------|-------|--------------|
| G70718-31A | 50 lb bag | white | 747224007186 |
| G90918-31A | 50 lb bag | gray | 747224009180 |



**GLASS
TILES**
(CRACK
PROTECTION)



STONEWALL™

HIGH PERFORMANCE & NON-SAG MORTAR
(White only)

StoneWall is for interior or exterior, commercial or residential installations to set all types of porcelain, glass, Saltillo, ceramic, granite, slate, marble, limestone, and dimension stone tiles. StoneWall is formulated to prevent large bodied ceramic, porcelain and stone tiles from slipping in vertical applications. StoneWall is also suitable for installing floor tiles.

Excellent for Large Bodied Tile and Stone in Vertical Applications.

Exceeds ALL requirements of ANSI A118.4 and A118.11.

Excellent for use on all approved floors and walls.

For interior and exterior jobs.

High Compressive Strengths for Extra Heavy Service.

Available in 50 lb. bags.

VOC: 0 g/L

| Item # | Size | Color | Barcode # |
|------------|-----------|-------|--------------|
| G00737-STW | 50 lb bag | white | 747224007377 |

**NON
SAG**
(GLASS
TILES)



SINGLE-FLEX® F.S.™

FAST SETTING LATEX THIN SET
(913 white/973 gray)

Single-Flex F.S. is a rapid setting, multipurpose latex modified thin set mortar. Use Single-Flex F.S. where there are limited downtime or to set and grout tile in the same day.

Mix Single Flex F.S. with water or 425 Multi-Purpose Acrylic Latex Admixture for improved bond strength and flexibility.

Single-Flex F.S. is suitable for setting porcelain, ceramic and stone tile in both interior and exterior applications. Single-Flex F.S. is recommended for installing tile over plywood, backer board and approved waterproofing/crack isolation membranes and existing ceramic and vinyl flooring.

Available in 50 lb. bags.

VOC: 0 g/L

| Item # | Size | Color | Barcode # |
|------------|-----------|-------|--------------|
| G00913-33A | 50 lb bag | white | 747224265241 |
| G00973-33A | 50 lb bag | gray | 747224262240 |



**FAST
SET**



| Product | Description | Tile Types | Substrates | Final Set | 28 Day Shear Strength Porcelain Tile |
|-------------------------|--|------------|---------------------|---------------|--------------------------------------|
| ReFlex® | High Performance | ABCDEFGHIJ | 1,2,3,4,5,6,7,9 | 10-15 Hours | 576 psi |
| Single-Flex® FS | Premium Latex Modified Fast Setting mixed with water | ABCDEFH | 1,2,3,4,5,6,7,9 | 60-90 Minutes | 490 psi |
| Single-Flex® FS | Premium Latex Modified Fast Setting mixed with Bostik® 425 | ABCDEFH | 1,2,3,4,5,6,7,9 | 60-90 Minutes | 575 psi |
| StoneWall™ | High Performance and Non-Sag | ABCDEFGHIJ | 1,2,3,4,5,6,7,9 | 10-15 Hours | 575 psi |
| Single-Flex® | Premium Latex Modified | ABCDEFH | 1,2,3,4,5,6,7,9 | 15 Hours | 450 psi |
| Big Tile & Stone™ | Premium Latex Modified Medium Set | ABCDEFH | 1,2,3,4,5,6,7,9 | 10-15 Hours | 375 psi |
| Bostik® PM | Multi-Purpose Latex Modified | ABCDEFH | 1,2,3,4,5,6,7,9 | 15 Hours | 400 psi |
| Porcelain-Mate™ | Polymer-modified | ABCDEFH | 2,4,9 (1,3,5,6,7)** | 12 Hours | 250 psi |
| Tile-Mate® Premium | Mixed with Bostik® 425 | ABCDEFH | 1,2,3,4,5,6,7,9 | 9 Hours | 470 psi |
| | Mixed with water | ABCDEFH | 1,2,3,4,5,6,7 | 12 Hours | 200 psi |
| Tile-Mate® Floor & Wall | Mixed with Bostik® 425 | ABCDEFH | 1,2,3,4,5,6,7,9 | 9 hours | 420 psi |
| | Mixed with water | ABCDEFH | 1,2,3,4,5,6,7,9 | 12 Hours | 200 psi |
| Ditra-Set™ | Premium Thin Set | ABCDEFH | 1,2,3,4,5,6,9 | 12 Hours | 250 psi |

SINGLE-FLEX®



PREMIUM MULTI-PURPOSE LATEX THIN SET
(716 white/916 gray)

Single-Flex is suitable for setting porcelain, ceramic and stone tile in both interior and exterior applications. Single Flex is recommended for installing tile over plywood, backer board and approved water proofing/crack isolation membranes, as well as existing ceramic and vinyl flooring. Mix with water only.

Available in 50 lb. bags.

VOC: 0 g/L



| Item # | Size | Color | Barcode # |
|------------|-----------|-------|--------------|
| G00716-41A | 50 lb bag | white | 747224254245 |
| G00916-41A | 50 lb bag | gray | 747224257246 |

BIG TILE & STONE™



PREMIUM LATEX MEDIUM BED MORTAR
(911 white/966 gray)

Big Tile and Stone is a latex-modified medium bed mortar designed for setting large floor tile. Big Tile & Stone is formulated to fill in uneven surfaces from 1/8" to 3/4" beneath the tile, minimizing lippage between tiles. Big Tile and Stone also contains surface-active agents to provide maximum transfer between the mortar and tile.

Big Tile & Stone is suitable for setting porcelain, ceramic and stone tile in both interior and exterior applications. Big Tile & Stone is recommended for installing tile over plywood, backer board and approved waterproofing/crack isolation membranes and over existing ceramic and vinyl flooring.

Available in 50 lb. bags.

VOC: 0 g/L



MEDIUM
BED

| Item # | Size | Color | Barcode # |
|------------|-----------|-------|--------------|
| G00914-DR1 | 50 lb bag | white | 747224009142 |
| G00962-DR1 | 50 lb bag | gray | 747224009623 |



| 28 Day Glazed Wall Tile | Shear Strength Quarry Tile | Strength Quarry Tile/Wood | 28 Day Compressive Strength | Specifications |
|-------------------------|----------------------------|---------------------------|-----------------------------|----------------------------------|
| 560 psi | 425 psi | 300 psi | 3600 psi | ANSI A118.4 & A118.11 |
| 500 psi | 400 psi | 250 psi | 3100 psi | ANSI A118.4 & A118.11 |
| 560 psi | 450 psi | 260 psi | 3166 psi | ANSI A118.4 & A118.11 |
| 550 psi | 425 psi | 300 psi | 3403 psi | ANSI A118.4 & A118.11 |
| 450 psi | 440 psi | 250 psi | 3450 psi | ANSI A118.4 & A118.11 |
| 557 psi | 300 psi | 250 psi | 3400 psi | ANSI A118.4 & A118.11 |
| 443 psi | 300 psi | 200 psi | 3000 psi | ANSI A118.4 & A118.11 |
| 300 psi | 225 psi | N/A | 3200 psi | ANSI A118.1 & A118.4 (A118.11**) |
| 504 psi | 370 psi | 175 psi | 3300 psi | A118.4 & A118.11 |
| 300 psi | 225 psi | N/A | 3200 psi | A118.1 |
| 515 psi | 400 psi | 175 psi | 3200 psi | A118.4 & A118.11 |
| 280 psi | 215 psi | N/A | 3100 psi | A118.1 |
| 300 psi | 225 psi | N/A | 3200 psi | ANSI A118.1, A118.4* & A118.11* |



TILE TYPES

- A Non-Vitreous
- B Semi-Vitreous
- C Vitreous
- D Impervious/Porcelain
- E White Translucent Marbles
- F Granite, Stable Stones, Slate
- G Moisture Sensitive Stone (i.e. Russo LeVanto and Nero Marquina Marble or Green Marble and their Agglomerates)
- H Large Ceramic Tile, Stable Stone and Granite
- I Resin Backed Stone
- J Glass Tiles

SUBSTRATES

- 1 Plywood
- 2 Concrete
- 3 Gypsum Wallboard
- 4 Cementitious Backer Units
- 5 Properly Prepared Ceramic Tile
- 6 Properly Prepared Vinyl/ VCT Tile
- 7 Cutback Residue (interior, dry only)
- 8 Clean Steel
- 9 Approved Waterproofing Membranes

BOSTIK® PM™



MULTI-PURPOSE LATEX MODIFIED
(717 white/917 gray)

Polymer-modified thin set mortar is suitable for setting porcelain, ceramic and stone tile in both interior and exterior applications. Bostik PM is recommended for installing tile over plywood, backer board and approved waterproofing/crack isolation membranes as well as existing ceramic and vinyl flooring.

Available in 50 lb. bags.

VOC: 0 g/L



| Item # | Size | Color | Barcode # |
|------------|-----------|-------|--------------|
| G00717-29A | 50 lb bag | white | 747224273246 |
| G00917-29A | 50 lb bag | gray | 747224240347 |

PORCELAIN-MATE™



POLYMER-MODIFIED THIN SET MORTAR
(769 white/969 gray)

Porcelain-Mate is for setting all types of ceramic, porcelain, granite, slate, marble, limestone, and dimension stone tiles. Use over properly prepared concrete, cement backer board, cured mortar beds, brick and cement block and Bostik GoldPlus.

Available in 50 lb. bags.

VOC: 0 g/L



| Item # | Size | Color | Barcode # |
|------------|-----------|-------|--------------|
| G00769-8C1 | 50 lb bag | white | 747224007698 |
| G00969-8C1 | 50 lb bag | gray | 747224009692 |



TILE-MATE® PREMIUM



PREMIUM THIN SET MORTAR
(710 white/760 gray)

Tile-Mate is a premium dual-purpose Portland cement thin-set mortar. Tile-Mate may be mixed with water for traditional masonry substrate for setting ceramic tile and natural stone in interior applications.

Mix Tile-Mate with Bostik® 425 Multi-Purpose Acrylic Latex Admixture or 447 Flex-A-Lastic for exterior installations, porcelain tile, applications over plywood, cement board and approved waterproofing/crack isolation membranes, as well as existing ceramic and vinyl flooring.

Available in 50 lb. bags.

VOC: 0 g/L



| Item # | Size | Color | Barcode # |
|------------|-----------|-------|--------------|
| G00710-30A | 50 lb bag | white | 747224007100 |
| G00760-30A | 50 lb bag | gray | 747224250247 |

TILE-MATE® FLOOR & WALL



THIN SET MORTAR
(712 white/762 gray)

A dual purpose Portland cement mortar for interior or exterior installations to set all types ceramic porcelain, granite, slate, marble, limestone and dimension stone tiles.

Available in 50 lb. bags.

VOC: 0 g/L



| Item # | Size | Color | Barcode # |
|------------|-----------|-------|--------------|
| G00712-26A | 50 lb bag | white | 747224167347 |
| G00762-26A | 50 lb bag | gray | 747224267344 |

DITRA-SET™



THIN SET & MEDIUM BED MORTAR
(White only)

Ditra-Set is composed of select, proprietary chemicals, carefully graded aggregates, inorganic adhesion promoters and purified cements. It provides outstanding workability, excellent durability, and superior bond strengths in interior and exterior applications when used in conjunction with Schluter-DITRA® uncoupling membrane over substrates approved by Schluter® Systems and to set ceramic, porcelain and stone tile of Schluter-DITRA®.


Available in 50 lb. bags.

VOC: 0 g/L



| Item # | Size | Color | Barcode # |
|------------|-----------|-------|--------------|
| G00919-DTM | 50 lb bag | white | 747224009197 |

**Schluter-DITRA®
Approved**

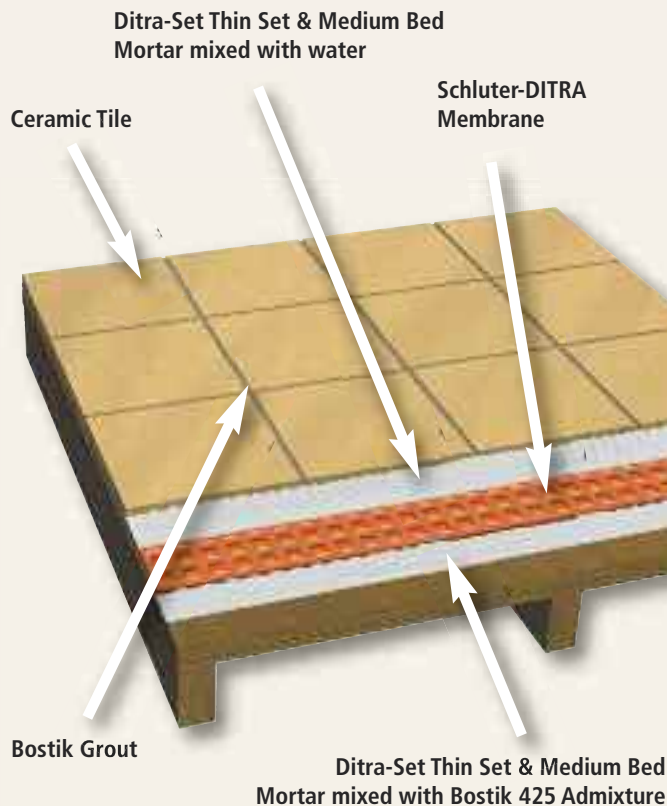



425 MULTI-PURPOSE ACRYLIC LATEX ADMIXTURE™

GROUT & MORTAR ADMIXTURE

Designed as an admixture used instead of water for thin set and ceramic tile grouts. Provides improved shear bonds, and compressive strengths, frost resistance and stain resistance. Used with Bostik Porcelain-Mate, Ditra-Set, Tile-Mate Premium and Tile-Mate Floor and Wall Thin Set Mortars for exterior installations, porcelain tile, over plywood subfloors or over Ultra-Set Advanced, Bostik GoldPlus. Use with Bostik Ceramic Tile Grouts to improve bond to porcelain tile, add flexibility as well as for installations in freeze thaw environments. May be used to prepare Portland cement bond coats and mortar beds. May also be mixed with Webcrete 95 for improved performance.

Available in 5, 2, 1 gallon & quart containers.

VOC: 0 g/L

| Item # | Size | Barcode # |
|-----------|---------------|--------------|
| G00425-24 | 5 gallon pail | 74722442524 |
| G00425-11 | 2 gallon pail | 74722442511 |
| G00425-06 | 1 gallon pail | 747224425065 |
| G00425-03 | 1 quart | 747224425034 |



447 FLEX-A-LASTIC™

FLEXIBLE MORTAR ADMIXTURE

This admixture is an extremely high solids, high-performance acrylic emulsion designed to be mixed full strength with Tile-Mate thin-set mortars. Use 447 Flex-A-Lastic wherever maximum performance is desired. Use over difficult, non-traditional substrates, existing vinyl or ceramic flooring, exterior installations subject to moisture and freezing, and floors with deflection up to 1/240. The tacky consistency of Flex-A-Lastic is excellent for setting large wall tile as well.

When mixed with Tile-Mate thin-set mortars, Flex-A-Lastic exceeds the requirements of ANSI A118.4 and ANSI A118.11.

Available in 5 gallon containers.

VOC: 0 g/L

| Item # | Size | Barcode # |
|-----------|---------------|--------------|
| G00447-23 | 5 gallon pail | 747224447340 |



MASTICS

BOSTIK® D-2001 ULTRA-PREMIUM MASTIC

SUPERIOR PERFORMANCE CERAMIC TILE MASTIC

Ultra-Premium high performance mastic for interior installations of ceramic, porcelain and stone tiles. Bostik Ultra-Premium is ready to use and provides excellent vertical grab for large body wall tile.

Ultra-Premium Mastic exceeds the requirements of ANSI A136.1 (Type I & II) mastics. Bostik Ultra-Premium mastic may be used over concrete, cement block, cement backer board, DensShield, gypsum wallboard, veneer plaster, Bostik Ultra-Set Advanced, Black-Top and Bostik GoldPlus membranes.

Available in 3.5 gallon and 1 gallon containers.

| Item # | Size | Barcode # | Case Barcode # |
|--------|-----------------|-------------------|---------------------|
| G32925 | 3.5 gallon pail | each 747224329257 | |
| G32921 | 4 x 1 gallons | each 747224329219 | case 10747224329216 |



BOSTIK® MULTI-PURPOSE MASTIC

FLOOR & WALL MASTIC

A multi-purpose mastic for interior installations of ceramic, porcelain and stone tiles. Bostik Multi-Purpose is ready to use and provides excellent vertical grab. It exceeds the requirements of ANSI A136.1 (Type I & II) mastics. Multi-Purpose may be used over concrete, cement block, cement backer board, Dens Shield, gypsum wallboard, veneer plaster, Bostik Ultra-Set Advanced, Black-Top and GoldPlus membranes.

Available in 3.5 gallon containers.

| Item # | Size | Barcode # |
|--------|-----------------|-------------|
| G39825 | 3.5 gallon pail | 74722439853 |

BOSTIK® PROFESSIONAL GRADE MASTIC

CERAMIC TILE ADHESIVE

BOSTIK Professional Grade Mastic exceeds the requirements of ANSI A136.1 (Type I & II) mastics. It can be used over concrete, cement block, cement backer board, Dens Shield, gypsum wallboard, veneer plaster.

Available in 3.5 gallon containers.

| Item # | Size | Barcode # |
|--------|-----------------|--------------|
| G39925 | 3.5 gallon pail | 747224399250 |





BOSTIK® CERAMIC TILE GROUT

(SANDED)

Bostik Ceramic Tile Grout is a proven blend of quartz aggregates, specialty cements and colorfast pigments.

Use Bostik Ceramic Tile Grout for grouting ceramic tile, porcelain tile, quarry tile, brick pavers, slate, marble, granite and structural glazed block from 1/8" to 1 1/2". Ceramic Tile Grout may be used for interior or exterior applications.

Ceramic Tile Grout meets the requirements of ANSI A118.6 mixed with water and A118.7 mixed with Bostik 425 Multi-Purpose Latex Admixture.

Available in 25 lb. and 9 lb. bags.

VOC: 0 g/L

For Item #, Color, Size & Barcode #, please refer to chart in the back of Catalog.



BOSTIK® DRY TILE GROUT

(UNSANDED)

Dry tile grout is a proven blend of quartz aggregates and specialty cements and color fast pigments.

Use Dry Tile Grout where joints are less than or equal to 1/8" wide. Dry Tile Grout is ideal for grouting ceramic tile, porcelain tile, marble and granite.

Available in 25 lb. (selective colors) and 5 lb. bags.

VOC: 0 g/L

For Item #, Color, Size & Barcode #, please refer to chart in the back of Catalog.



EZPOXY™

GROUT AND MORTAR

Used for interior or exterior, vertical or horizontal installations. Typical applications include commercial kitchens, lobbies, bathrooms, fast food restaurants, breweries, dairies, wineries, factories, shopping malls, meat processors, and distilleries.

As a Mortar: Suitable bonding mortar for interior applications only. Use to set all ceramic, quarry, porcelain, granite, slate, pre-cast Terrazo, dimension stone tiles and moisture sensitive stone. Use over properly prepared concrete; structurally sound exterior grade plywood (interior/dry use only); cementitious backer board; Bostik GoldPlus, UltraSet Advanced, Black-Top and existing well bonded vinyl/VCT or ceramic tile.

As a bonding mortar, EzPoxy should be for interior use only.

As a Grout: Use to grout all ceramic, quarry, porcelain, granite, slate, and pre-cast Terrazo, dimension stone tiles, in joints from 1/16" to 1/2" wide.

Meets ANSI Specification A118.3. Available in 14lb. kits. (Kits contain Powder Aggregate, Part A Resin and Part B Hardener.) VOC: 0 g/L

For Item #, Color, Size & Barcode #, please refer to chart in the back of Catalog.



BOSTIK® 1900™

MODIFIED EPOXY MORTAR & GROUT ADMIXTURE

1900 is a two-component epoxy admixture designed to be mixed with Bostik Ceramic Tile Grout (sanded only – except white). Bostik 1900 creates a modified epoxy grout and setting mortar with exceptional stain resistance and tenacious adhesion – all with workability like a traditional Portland cement grout or mortar.

The 1900 two-component epoxy admixture system exceeds the requirements of ANSI A118.8 for modified epoxy grout and mortar. Use 1900 for grouting ceramic tile, porcelain tile, quarry tile, brick pavers, slate, marble, granite and structural glazed block wherever a high resistance to staining is required.

Available in regular and double size units.

VOC: 0 g/L

| Item # | Size | Barcode # |
|---------------|--------------|--------------|
| G01900-02-19R | Regular unit | 747224019004 |



Use Bostik's
Electronic Grout
Coverage Calculator
www.bostik-us.com

Please refer to Grout Selector Card for color selection. The Bostik® Grout Selector Cards are the standard for color selection, manufacturing, and quality control. Colors may vary due to job site conditions, absorption of tile, mixing ratios, or installation methods or from batch to batch and therefore may vary significantly from Grout Selector Card.



BOSTIK® TRUCOLOR™

PRE-MIXED GROUT



Bostik TruColor Pre-Mixed Grout is a patented, water-based, urethane grout offering the ultimate in color accuracy, stain* protection and crack resistance for residential and commercial tile installations. This breakthrough formulation installs up to 50% faster than traditional grouts, and never needs to be sealed. Its perfect balance of flexibility and toughness enables it to exhibit unmatched performance and crack resistance.



TruColor contains 8% Recycled Content and has low VOC which help to contribute to USGBC LEED Credits: MR 4.1 & 4.2 (Recycled Content) and EQ 4.1 (Low Emmiting Materials)

TruColor exceeds the grout-relevant-portion of the ANSI A118.3 epoxy standard (modified ANSI 118.3-UG).

Available in 9 lb. and 18 lb. pails

VOC: 35 g/L

- Consistent Color Every Time
- Crack Resistant Flexibility
- No Sealing Required
- Ready to Use

| 18 lb. Unit Coverage Chart (sq. ft.) | Tile Size (inches) | Joint width | | | | | |
|--------------------------------------|----------------------|-------------|-------|-------|------|-------|------|
| | | 1/8" | 1/16" | 3/16" | 1/4" | 5/16" | 3/8" |
| | 1" x 1" 1/4" | 63 | 32 | - | - | - | - |
| | 2" x 2" 1/4" | 126 | 63 | - | - | - | - |
| | 4 1/4" x 4 1/4" 3/8" | 214 | 107 | 71 | 54 | 36 | 27 |
| | 4" x 8" 1/2" | 168 | 84 | 56 | 42 | 28 | 21 |
| | 6" x 6" 1/2" | 189 | 95 | 63 | 47 | 32 | 24 |
| | 8" x 8" 3/8" | 337 | 168 | 112 | 84 | 56 | 42 |
| | 12" x 12" 3/8" | 505 | 253 | 168 | 126 | 84 | 63 |
| | 13" x 13" 3/8" | 547 | 274 | 182 | 137 | 91 | 68 |
| | 16" x 16" 3/8" | 673 | 337 | 224 | 168 | 112 | 84 |
| | 18" x 18" x 3/8" | 758 | 379 | 253 | 189 | 126 | 95 |
| | 24" x 24" x 3/8" | 1010 | 505 | 337 | 253 | 168 | 126 |

| 9 lb. Unit Coverage Chart (sq. ft.) | Tile Size (inches) | Joint width | | | | | |
|-------------------------------------|----------------------|-------------|-------|-------|------|-------|------|
| | | 1/8" | 1/16" | 3/16" | 1/4" | 5/16" | 3/8" |
| | 1" x 1" 1/4" | 32 | 16 | - | - | - | - |
| | 2" x 2" 1/4" | 63 | 32 | - | - | - | - |
| | 4 1/4" x 4 1/4" 3/8" | 107 | 54 | 36 | 27 | 18 | 13 |
| | 4" x 8" 1/2" | 84 | 42 | 28 | 21 | 14 | 11 |
| | 6" x 6" 1/2" | 95 | 47 | 32 | 24 | 16 | 12 |
| | 8" x 8" 3/8" | 168 | 84 | 56 | 42 | 28 | 21 |
| | 12" x 12" 3/8" | 253 | 126 | 84 | 63 | 42 | 32 |
| | 13" x 13" 3/8" | 274 | 137 | 91 | 68 | 46 | 34 |
| | 16" x 16" 3/8" | 337 | 168 | 112 | 84 | 56 | 42 |
| | 18" x 18" x 3/8" | 379 | 189 | 126 | 95 | 63 | 47 |
| | 24" x 24" x 3/8" | 505 | 253 | 168 | 126 | 84 | 63 |

* With immediate cleaning and proper maintenance, TruColor and Dimension are resistant to staining when exposed to most common household goods and cleaning agents. Long-term exposure to any material can increase the potential for staining.



Contains 80% Post-Consumer Recycled Glass Content

Give Your Next Grout Project a Touch of Glass

BOSTIK® DIMENSION™

REFLECTIVE, PRE-MIXED GROUT

Dimension™ Reflective, Pre-Mixed Urethane Grout is a patented, glass filled, ready-to-use, water based, urethane grout. Dimension contains micro glass beads and a translucent, urethane binder that both reflect light as well as allow it to pass through. This creates a unique reflective appearance in all tile installations as well as a three dimensional effect within glass tile installations.

Applications include interior and exterior installation of ceramic, porcelain, glass, metal and natural stone tiles on floors and walls. It can be used in horizontal (floor) grout joint widths from 1/16" to 1/2" and vertical (wall) grout joints from 1/16" to 1/4".

Designed for residential and commercial applications, Dimension offers lifetime stain resistance* and superior crack resistance. It contains built-in urethane sealer technology, so it never needs to be sealed and is ideal for use in heavy traffic areas.

Dimension contains Bostik's Blockade™ antimicrobial protection, which inhibits the growth of bacteria, mold, and mildew on the surface of cured grout and enables it to resist stains caused by mold. Dimension is a technology engineered to appeal to today's green conscience marketplace, specifically those seeking to obtain U.S. Green Building Council LEED® certification for their projects. It contains 80% post-consumer, recycled glass and its unique combination of features produces one-of-a-kind specification potential for architects and designers.

Available in 9 lb. and 18 lb. pails

VOC: 35 g/L

For Item #, Color, Size & Barcode #, please refer to chart in the back of Catalog.





PURE SILICONE CAULKING



Pure Silicone Caulking from Bostik is a 100% RTV Curing Silicone Caulking which is water-proof and permanently flexible. Use Pure Silicone Caulking in tub surrounds to seal drains, fixtures, and plumbing penetrations.

Use as an adhesive or bedding compound for countertops, soap dishes and thresholds. Pure Silicone Caulking is highly chemical resistant and can withstand temperatures to 400°F.



| Item # | Size | Color | Barcode # |
|--------|----------------------|-------|--------------|
| G93202 | 12x10.3oz cartridges | white | 747224932020 |
| G93201 | 12x10.3oz cartridges | clear | 747224932013 |



TUB & TILE CAULK

This water cleanable caulking is for use in tub surrounds, countertops, walls, and floors. For interior applications only.

Available in 10.1 oz. cartridges.



GROUT STAIN



This oil-based stain is used to restore the color of grout. Grout stain is also an excellent grout sealer.

Grout Stain is an extremely durable product with excellent hiding power. Grout Stain is sold in pint cans.

BLAZE™








Blaze™ Urethane Grout and General Purpose Cleaner is an effective way to clean tile surfaces after installing urethane based grouts. It can be used to remove haze which may remain after urethane grout installation and, in its diluted form, is an excellent routine tile floor cleaner.

While urethane grout is typically easy to clean off the surface of most tiles, some surfaces create challenges that make it necessary to use a chemical-based cleaner to remove residual urethane film or haze. Surfaces that are more difficult to clean that will benefit from the use of Blaze include high gloss surfaces, through-body porcelains and etched/frosted glass.

Blaze is safe to use on ceramic and porcelain tile, natural stone such as marble, granite, limestone, travertine, sandstone, flagstone, masonry, concrete, metal and glass tile.

- Effectively Removes Urethane Grout Haze
- Excellent General Purpose Tile Cleaner
- Compatible With All Tile Surfaces

| Item # | Size | Barcode # |
|---------|--------------------|--------------|
| HZBK128 | 4 x 1 gallon | 747224151261 |
| HZBK24 | 12 x 24 oz bottles | 747224251268 |





WARRANTY



The Limited Warranty for this product can be found at www.Bostik-US.com/resource-center/warranties or by calling 1-800-726-7845 (choose option 2, then option 2 again). TO THE MAXIMUM EXTENT ALLOWED BY LAW, BOSTIK DISCLAIMS ALL OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. UNLESS OTHERWISE STATED IN THE LIMITED WARRANTY, THE SOLE REMEDY FOR BREACH OF WARRANTY IS REPLACEMENT OF THE PRODUCT OR REFUND OF THE BUYER'S PURCHASE PRICE. BOSTIK DISCLAIMS ANY LIABILITY FOR DIRECT, INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES TO THE MAXIMUM EXTENT ALLOWED BY LAW. DISCLAIMERS OF IMPLIED WARRANTIES MAY NOT BE APPLICABLE TO CERTAIN CLASSES OF BUYERS AND SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU. It is the buyer's obligation to test the suitability of the product for an intended use prior to using it. The Limited Warranty extends only to the original purchaser and is not transferable or assignable. Any claim for a defective product must be filed within 30 days of discovery of a problem, and must be submitted with written proof of purchase.



| Item # | New Product Name | Barcode # | Case Barcode # | Item # | New Product Name | Barcode # | Case Barcode # |
|-----------|--------------------------------|--------------|----------------|-----------|--------------------------------|--------------|----------------|
| G00622-16 | BOS CTG 25# LATTE H192 | 747224166227 | | G00624-16 | BOS CTG 25# CASHMERE H178 | 747224166241 | |
| G00622-35 | BOS CTG 4X9# LATTE H192 | 747224356222 | 10747224356229 | G00624-35 | BOS CTG 4X9# CASHMERE H178 | 747224356246 | 10747224356243 |
| G96116-15 | BOS CTG 25# BUFF H188 | 747224151162 | | G96635-15 | BOS CTG 25# DELOREAN GRAY H160 | 747224635150 | |
| G96116-35 | BOS CTG 4X9# BUFF H188 | 747224351166 | 10747224351163 | G96635-35 | BOS CTG 4X9# DELOREAN GR H160 | 747224635358 | 10747224635355 |
| G96759-15 | BOS CTG 25# ALABASTER H189 | 747224157591 | | G00668-16 | BOS CTG 25# FRENCH GRAY H142 | 747224668158 | |
| G96759-35 | BOS CTG 4X9# ALABASTER H189 | 747224357595 | 10747224357592 | G00668-35 | BOS CTG 4X9# FRENCH GRAY H142 | 747224668356 | 10747224668353 |
| G00670-16 | BOS CTG 25# ANTIQUE WHITE H135 | 747224670151 | | G96756-15 | BOS CTG 25# SAND DUNE H181 | 747224157560 | |
| G00670-35 | BOS CTG 4X9# ANTIQUE WHIT H135 | 747224670359 | 10747224670356 | G96756-35 | BOS CTG 4X9# SAND DUNE H181 | 747224357564 | 10747224357561 |
| G96114-15 | BOS CTG 25# CLASSIC BONE H158 | 747224114150 | | G96289-15 | BOS CTG 25# PORTABELLA H184 | 747224152893 | |
| G96114-35 | BOS CTG 4X9# CLASSIC BONE H158 | 747224114358 | 10747224114355 | G96289-35 | BOS CTG 4X9# PORTABELLA H184 | 747224352897 | 10747224352894 |
| G96284-15 | BOS CTG 25# JAMOCA H162 | 747224284150 | | G00621-16 | BOS CTG 25# SUMMER WHEAT H150 | 747224621153 | |
| G96284-35 | BOS CTG 4X9# JAMOCA H162 | 747224284358 | 10747224284355 | G00621-35 | BOS CTG 4X9# SUMER WHEAT H150 | 747224621351 | 10747224621358 |
| G00625-16 | BOS CTG 25# SAND BEIGE H148 | 747224625151 | | G96522-15 | BOS CTG 25# HERON BLUE H171 | 747224522153 | |
| G00625-35 | BOS CTG 4X9# SAND BEIGE H148 | 747224625359 | 10747224625356 | G96522-35 | BOS CTG 4X9# HERON BLUE H171 | 747224522351 | 10747224522358 |
| G00666-16 | BOS CTG 25# SHADOW H195 | 747224177667 | | G00611-16 | BOS CTG 25# WHITE H152 | 747224611154 | |
| G00666-35 | BOS CTG 4X9# SHADOW H195 | 747224356666 | 10747224356663 | G00611-35 | BOS CTG 4X9# WHITE H152 | 747224356116 | 10747224356113 |
| G96265-15 | BOS CTG 25# ALMOND H153 | 747224265159 | | G96332-15 | BOS CTG 25# MYST H165 | 747224332158 | |
| G96265-35 | BOS CTG 4X9# ALMOND H153 | 747224265357 | 10747224265354 | G96332-35 | BOS CTG 4X9# MYST H165 | 747224332356 | 10747224332353 |
| G96741-15 | BOS CTG 25# LINEN H163 | 747224741158 | | G00677-16 | BOS CTG 25# PEACHS&CREAM H147 | 747224677150 | |
| G96741-35 | BOS CTG 4X9# LINEN H163 | 747224741356 | 10747224741353 | G00677-35 | BOS CTG 4X9# PEACHS&CREAM H147 | 747224677358 | 10747224677355 |
| G96527-15 | BOS CTG 25# ICE BLUE H161 | 747224527158 | | G96757-15 | BOS CTG 25# ALPINE WHITE H183 | 747224157577 | |
| G96527-35 | BOS CTG 4X9# ICE BLUE H161 | 747224527356 | 10747224527353 | G96757-35 | BOS CTG 4X9# ALPINE WHITE H183 | 747224357571 | 10747224357578 |
| G00672-16 | BOS CTG 25# CHAMPAGNE H138 | 747224672155 | | G96115-15 | BOS CTG 25# BRIGHT WHITE H177 | 747224151155 | |
| G00672-35 | BOS CTG 4X9# CHAMPAGNE H138 | 747224672353 | 10747224672350 | G96115-35 | BOS CTG 4X9# BRIGHT WHITE H177 | 747224351159 | 10747224351156 |
| G00684-16 | BOS CTG 25# CHAR BLACK H139 | 747224684158 | | G00627-16 | BOS CTG 25# FLASH WALNUT H141 | 747224627155 | |
| G00684-35 | BOS CTG 4X9# CHAR BLACK H139 | 747224684356 | 10747224684353 | G00627-35 | BOS CTG 4X9# FLASH WALNT H141 | 747224627353 | 10747224627350 |
| G00664-16 | BOS CTG 25# NATURAL H146 | 747224664150 | | G00675-16 | BOS CTG 25# TAUPE H151 | 747224675156 | |
| G00664-35 | BOS CTG 4X9# NATURAL H146 | 747224664358 | 10747224664355 | G00675-35 | BOS CTG 4X9# TAUPE H151 | 747224675354 | 10747224675351 |
| G00661-16 | BOS CTG 25# MISTY GRAY H144 | 747224661159 | | | | | |
| G00661-35 | BOS CTG 4X9# MISTY GRAY H144 | 747224661357 | 10747224661354 | | | | |
| G00673-16 | BOS CTG 25# MOBE PEARL H145 | 747224673152 | | | | | |
| G00673-35 | BOS CTG 4X9# MOBE PEARL H145 | 747224673350 | 10747224673357 | | | | |
| G96648-15 | BOS CTG 25# SILVER BULLET H168 | 747224648150 | | | | | |
| G96648-35 | BOS CTG 4X9# SILVR BULLET H168 | 747224648358 | 10747224648355 | | | | |
| G00641-16 | BOS CTG 25# BRICK H136 | 747224641151 | | | | | |
| G00641-35 | BOS CTG 4X9# BRICK H136 | 747224641359 | 10747224641356 | | | | |
| G00676-16 | BOS CTG 25# KAHLUA CREAM H143 | 747224676153 | | | | | |
| G00676-35 | BOS CTG 4X9# KAHLUA CREAM H143 | 747224676351 | 10747224676358 | | | | |
| G96747-15 | BOS CTG 25# SANDSTONE H167 | 747224747150 | | | | | |
| G96747-35 | BOS CTG 4X9# SANDSTONE H167 | 747224747358 | 10747224747355 | | | | |



| Item # | New Product Name | Barcode # | Case Barcode # |
|-----------|--------------------------------|--------------|----------------|
| G97759-17 | BOS DTG 25# ALABASTER H189 | 747224759177 | |
| G97757-17 | BOS DTG 25# ALPINE WHITE H183 | 747224757173 | |
| G00770-17 | BOS DTG 25# ANTIQUE WHITE H135 | 747224770172 | |
| G97115-17 | BOS DTG 25# BRIGHT WHITE H177 | 747224115171 | |
| G00772-17 | BOS DTG 25# CHAMPAGNE H138 | 747224772176 | |
| G00784-17 | BOS DTG 25# CHAR BLACK H139 | 747224784179 | |
| G97114-17 | BOS DTG 25# CLASSIC BONE H158 | 747224114174 | |
| G97635-17 | BOS DTG 25# DELOREAN GRAY H160 | 747224635174 | |
| G00722-17 | BOS DTG 25# LATTE H192 | 747224177223 | |
| G97741-17 | BOS DTG 25# LINEN H163 | 747224741172 | |
| G00761-17 | BOS DTG 25# MISTY GRAY H144 | 747224761170 | |
| G00773-17 | BOS DTG 25# MOBE PEARL H145 | 747224719171 | |
| G00777-17 | BOS DTG 25# PEACHS&CREAM H147 | 747224777171 | |
| G00719-17 | BOS DTG 25# WHITE H152 | 747224719171 | |
| G97759-22 | BOS DTG 6X5# ALABASTER H189 | 747224227591 | 10747224227598 |
| G97265-22 | BOS DTG 6X5# ALMOND H153 | 747224965227 | 10747224265224 |
| G97757-22 | BOS DTG 6X5# ALPINE WHITE H183 | 747224227577 | 10747224227574 |
| G00770-22 | BOS DTG 6X5# ANTIQUE WHIT H135 | 747224770226 | 10747224770223 |
| G00741-22 | BOS DTG 6X5# BRICK H136 | 747224741226 | 10747224741223 |
| G97115-22 | BOS DTG 6X5# BRIGHT WHITE H177 | 747224221155 | 10747224221152 |
| G97116-22 | BOS DTG 6X5# BUFF H188 | 747224221162 | 10747224221169 |
| G00724-22 | BOS DTG 6X5# CASHMERE H178 | 747224227249 | 10747224227246 |
| G00772-22 | BOS DTG 6X5# CHAMPAGNE H138 | 747224772220 | 10747224772227 |
| G00784-22 | BOS DTG 6X5# CHAR BLACK H139 | 747224784223 | 10747224784220 |
| G97114-22 | BOS DTG 6X5# CLASSIC BONE H158 | 747224114228 | 10747224114225 |
| G97635-22 | BOS DTG 6X5# DELOREANGRAY H160 | 747224635228 | 10747224635225 |
| G00727-22 | BOS DTG 6X5# FLASH WALNUT H141 | 747224727220 | 10747224727227 |
| G00768-22 | BOS DTG 6X5# FRENCH GRAY H142 | 747224768223 | 10747224768220 |
| G97522-22 | BOS DTG 6X5# HERON BLUE H171 | 747224522221 | 10747224522228 |
| G97527-22 | BOS DTG 6X5# ICE BLUE H161 | 747224527226 | 10747224527223 |
| G97758-22 | BOS DTG 6X5# IVORY PALACE H185 | 747224227584 | 10747224227581 |
| G97284-22 | BOS DTG 6X5# JAMOCA H162 | 747224284228 | 10747224284225 |
| G00776-22 | BOS DTG 6X5# KAHLUA CREAM H143 | 747224776228 | 10747224776225 |
| G00722-22 | BOS DTG 6X5# LATTE H192 | 747224227225 | 10747224227222 |
| G97741-22 | BOS DTG 6X5# LINEN H163 | 747224741226 | 10747224741223 |
| G00761-22 | BOS DTG 6X5# MISTY GRAY H144 | 747224761224 | 10747224761221 |
| G00773-22 | BOS DTG 6X5# MOBE PEARL H145 | 747224773227 | 10747224773224 |
| G97332-22 | BOS DTG 6X5# MYST H165 | 747224332226 | 10747224332223 |
| G00777-22 | BOS DTG 6X5# PEACHS&CREAM H147 | 747224777225 | 10747224777222 |
| G97289-22 | BOS DTG 6X5# PORTABELLA H184 | 747224222893 | 10747224222890 |

| Item # | New Product Name | Barcode # | Case Barcode # |
|-----------|--------------------------------|--------------|----------------|
| G00725-22 | BOS DTG 6X5# SAND BEIGE H148 | 747224725226 | 10747224725223 |
| G97756-22 | BOS DTG 6X5# SAND DUNE H181 | 747224227560 | 10747224227567 |
| G97747-22 | BOS DTG 6X5# SANDSTONE H167 | 747224747228 | 10747224747225 |
| G00766-22 | BOS DTG 6X5# SHADOW H195 | 747224227669 | 10747224227666 |
| G97648-22 | BOS DTG 6X5# SILVR BULLET H168 | 747224648228 | 10747224648225 |
| G00721-22 | BOS DTG 6X5# SUMMER WHEA H150 | 747224721228 | 10747224721225 |
| G00775-22 | BOS DTG 6X5# TAUPE H151 | 747224775221 | 10747224775228 |
| G00719-22 | BOS DTG 6X5# WHITE H152 | 747224719225 | 10747224719222 |

EZPOXY™

| Item # | New Product Name | Barcode # |
|--------|-----------------------------------|--------------|
| G93501 | BOS EZPOXY 14# MOBE PEARL H145 | 747224935012 |
| G93502 | BOS EZPOXY 14# TAUPE H151 | 747224935021 |
| G93503 | BOS EZPOXY 14# SAND BEIGE H148 | 747224935038 |
| G93504 | BOS EZPOXY 14# BLACK H139 | 747224935047 |
| G93505 | BOS EZPOXY 14# SILVER BULLET H168 | 747224935052 |
| G93506 | BOS EZPOXY 14# LINEN H163 | 747224935069 |
| G93507 | BOS EZPOXY 14# PORTABELLA H184 | 747224935076 |
| G93508 | BOS EZPOXY 14# DELOREAN GRAY H160 | 747224935083 |
| G93509 | BOS EZPOXY 14# BRICK H136 | 747224935090 |
| G93510 | BOS EZPOXY 14# FRENCH GRAY H142 | 747224935106 |



| Item # | Product Name | Barcode # |
|---------|--------------------------------|--------------|
| G922201 | BOS TRU 18# H160 Delorean Gray | 747224222015 |
| G922202 | BOS TRU 9# H160 Delorean Gray | 747224222022 |
| G922191 | BOS TRU 18# H162 Jamoca | 747224221919 |
| G922192 | BOS TRU 9# H162 Jamoca | 747224221926 |
| G922181 | BOS TRU 18# H150 Summer Wheat | 747224221810 |
| G922182 | BOS TRU 9# H150 Summer Wheat | 747224221827 |
| G922171 | BOS TRU 18# H148 Sand Beige | 747224221711 |
| G922172 | BOS TRU 9# H148 Sand Beige | 747224221728 |
| G922161 | BOS TRU 18# H158 Classic Bone | 747224221612 |
| G922162 | BOS TRU 9# H158 Classic Bone | 747224221629 |
| G922151 | BOS TRU 18# H184 Portabella | 747224221513 |
| G922152 | BOS TRU 9# H184 Portabella | 747224221520 |
| G922141 | BOS TRU 18# H145 Mobe Pearl | 747224221414 |
| G922142 | BOS TRU 9# H145 Mobe Pearl | 747224221421 |
| G922131 | BOS TRU 18# H163 Linen | 747224221315 |
| G922132 | BOS TRU 9# H163 Linen | 747224221322 |
| G922121 | BOS TRU 18# H195 Shadow | 747224221216 |
| G922122 | BOS TRU 9# H195 Shadow | 747224221223 |
| G922111 | BOS TRU 18# H143 Kahlua Cream | 747224221117 |
| G922112 | BOS TRU 9# H143 Kahlua Cream | 747224221124 |
| G922101 | BOS TRU 18# H146 Natural | 747224221018 |
| G922102 | BOS TRU 9# H146 Natural | 747224221025 |
| G922091 | BOS TRU 18# H139 Char Black | 747224220912 |
| G922092 | BOS TRU 9# H139 Char Black | 747224220929 |
| G922081 | BOS TRU 18# H138 Champagne | 747224220813 |
| G922082 | BOS TRU 9# H138 Champagne | 747224220820 |
| G922071 | BOS TRU 18# H142 French Gray | 747224220714 |
| G922072 | BOS TRU 9# H142 French Gray | 747224220721 |
| G922061 | BOS TRU 18# H153 Almond | 747224220615 |
| G922062 | BOS TRU 9# H153 Almond | 747224220622 |
| G922051 | BOS TRU 18# H144 Misty Gray | 747224220516 |
| G922052 | BOS TRU 9# H144 Misty Gray | 747224220523 |
| G922041 | BOS TRU 18# H135 Antique White | 747224220417 |
| G922042 | BOS TRU 9# H135 Antique White | 747224220424 |
| G922031 | BOS TRU 18# H189 Alabaster | 747224220318 |
| G922032 | BOS TRU 9# H189 Alabaster | 747224220325 |
| G922021 | BOS TRU 18# H192 Latte | 747224220219 |
| G922022 | BOS TRU 9# H192 Latte | 747224220226 |
| G922011 | BOS TRU 18# H152 White | 747224220110 |
| G922012 | BOS TRU 9# H152 White | 747224220127 |

| Item # | Product Name | Barcode # |
|----------|-----------------------------------|--------------|
| GG18-600 | BOS Dimension 18# Diamond H600 | 813560010668 |
| GG9-600 | BOS Dimension 9# Diamond H600 | 813560010514 |
| GG18-610 | BOS Dimension 18# Opal H610 | 813560010675 |
| GG9-610 | BOS Dimension 9# Opal H610 | 813560010521 |
| GG18-620 | BOS Dimension 18# Topaz H620 | 813560010682 |
| GG9-620 | BOS Dimension 9# Topaz H620 | 813560010538 |
| GG18-621 | BOS Dimension 18# Amber H621 | 813560010699 |
| GG9-621 | BOS Dimension 9# Amber H621 | 813560010545 |
| GG18-622 | BOS Dimension 18# Aventurine H622 | 813560010705 |
| GG9-622 | BOS Dimension 9# Aventurine H622 | 813560010552 |
| GG18-630 | BOS Dimension 18# Palm Wood H630 | 813560010712 |
| GG9-630 | BOS Dimension 9# Palm Wood H630 | 813560010569 |
| GG18-640 | BOS Dimension 18# Citrine H640 | 813560010729 |
| GG9-640 | BOS Dimension 9# Citrine H640 | 813560010576 |
| GG18-650 | BOS Dimension 18# Jade H650 | 813560010743 |
| GG9-650 | BOS Dimension 9# Jade H650 | 813560010583 |
| GG18-660 | BOS Dimension 18# Aquamarine H660 | 813560010750 |
| GG9-660 | BOS Dimension 9# Aquamarine H660 | 813560010590 |
| GG18-670 | BOS Dimension 18# Moonstone H670 | 813560010767 |
| GG9-670 | BOS Dimension 9# Moonstone H670 | 813560010606 |
| GG18-671 | BOS Dimension 18# Hematite H671 | 813560010774 |
| GG9-671 | BOS Dimension 9# Hematite H671 | 813560010613 |
| GG18-680 | BOS Dimension 18# Onyx H680 | 813560010781 |
| GG9-680 | BOS Dimension 9# Onyx H680 | 813560010620 |
| GG18-700 | BOS Dimension 18# Silver H700 | 813560010798 |
| GG9-700 | BOS Dimension 9# Silver H700 | 813560010637 |
| GG18-710 | BOS Dimension 18# Bronze H710 | 813560010804 |
| GG9-710 | BOS Dimension 9# Bronze H710 | 813560010644 |
| GG18-720 | BOS Dimension 18# Copper H720 | 813560010811 |
| GG9-720 | BOS Dimension 9# Copper H720 | 813560010651 |





Becoming One.

At Bostik, we're proud of our long-lasting track record of providing the highest quality flooring adhesives available. In an effort to evolve our brand, we are consolidating our ceramic products, Hydroment® and Durabond®, under the Bostik brand. Our new, unified brand embraces our past and rich history and will carry us into an exciting future.

Become one with Bostik.

For more information, call your local distributor or a Bostik customer service representative today at 1-800-726-7845.

Bostik
Green Products
Initiative
LEED Compliant

Bostik

Stronger Bonds, Better Life

www.bostik-us.com



BOSTIK, INC.
CONSUMER & CONSTRUCTION DIVISION
11320 W. Watertown Plank Road | Wauwatosa, WI 53226
P: 1-800-726-7845 | F: 414-774-8075
E: contactus@bostik-us.com
www.bostik-us.com

T29 09-30-12

LIVING ROOM

Bostik

Stronger Bonds, Better Life