


8 7 6 5 4 3 2 1

D

C


B

A

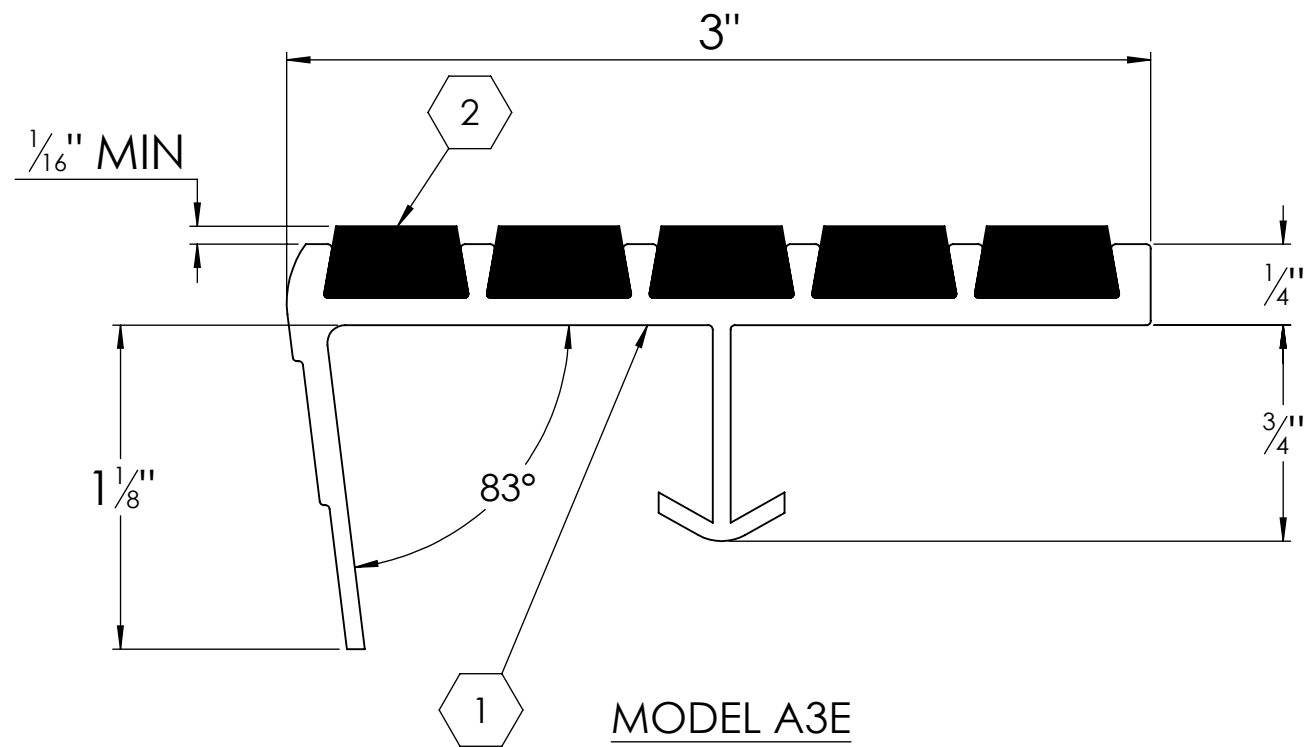

MODEL A3E

(SINGLE STAGE RIBBED ABRASIVE BARS)

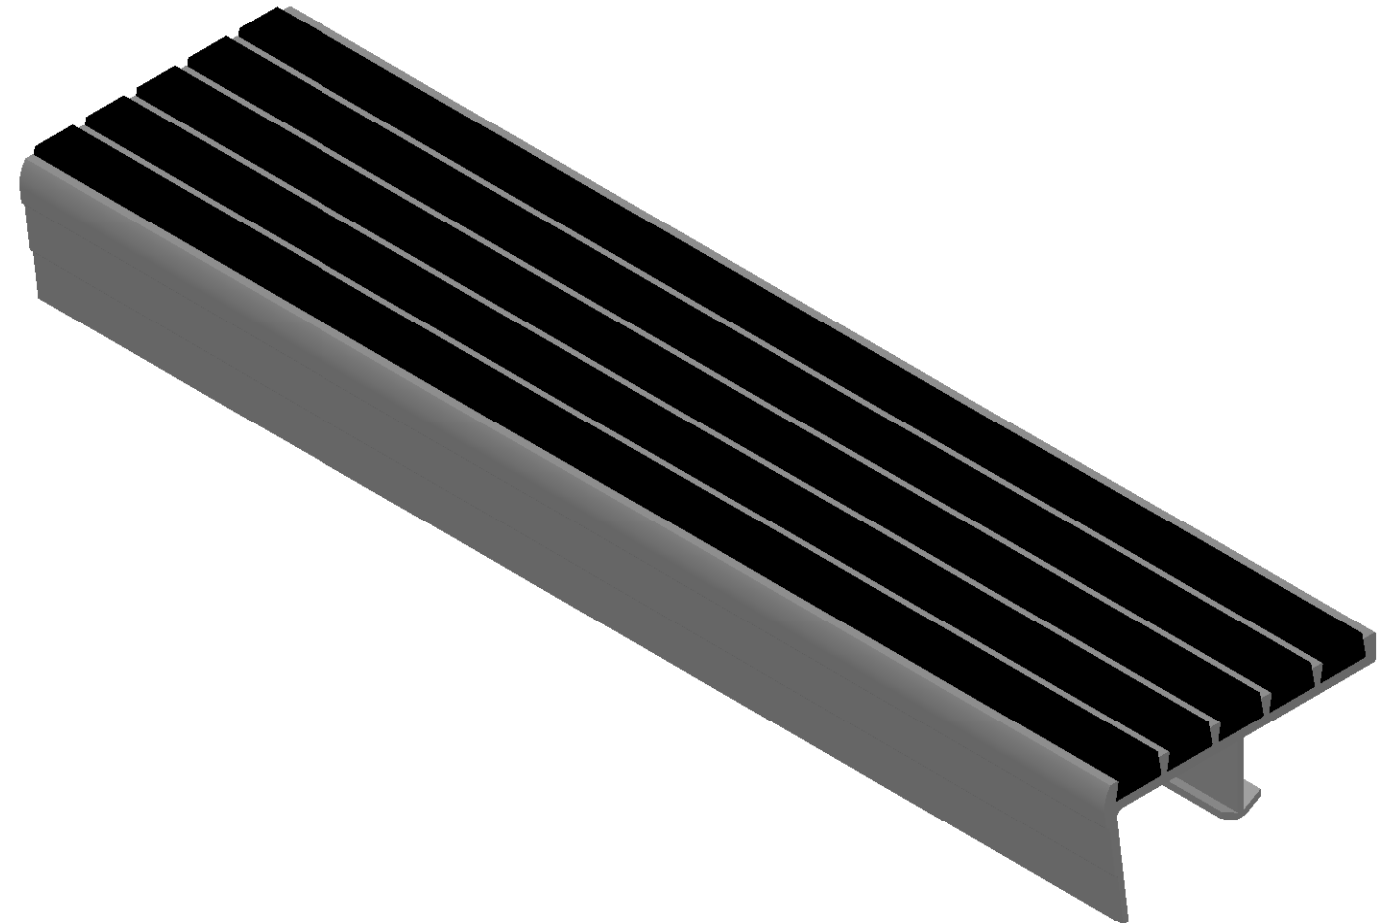

D

C

B

A

**SPECIFICATIONS:**

- ① **BASE:** HEAT TREATED EXTRUDED ALUMINUM ALLOY 6063 T-5
- ② **ABRASIVE:** ALUMINUM OXIDE SILICON CARBIDE GRANULES IN A UV PROTECTED, 2 PART EPOXY, LOCKED INTO EXTRUDED CHANNELS
- 3. **BASE FINISH:** MILL
- 4. **POURED CONCRETE STAIRS:** NOSING SHALL TERMINATE NO MORE THEN 3" FROM END OF STEPS
- 5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING SHALL BE FULL LENGTH OF STEPS, LESS 1/8" CLEARANCE


- 6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW, GRAY, RED, BROWN, GREEN, BURGUNDY, BLUE, BUFF
- 7. **LENGTH:** 12'0" MAXIMUM (STANDARD)

LENGTH	QTY	COLOR

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

8 7 6 5 4 3 2 1

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES



TITLE: V851, Stair Tread, Bar Ribbed Abrasive, Long Nose Angled, Alum Extruded Anchor,

MATERIAL	NAME	DATE	SIZE	DWG. NO.	REV
6063-T5	BMH	01/24/11	B	BSTSB-A3E	A
FINISH: MILL	RELEASED	PE	01/24/11	WEIGHT: 0.59 LB/FT	SHEET 1 OF 1

**BSTSB-A3E**