





# G-150U GRATE DETAIL

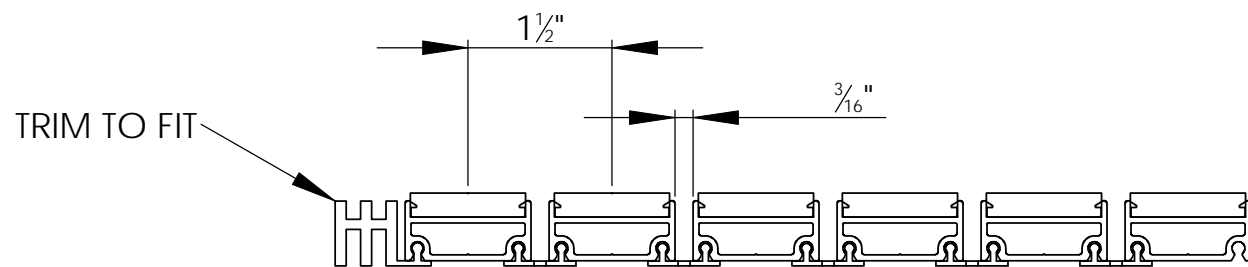

WIDTH VIEW

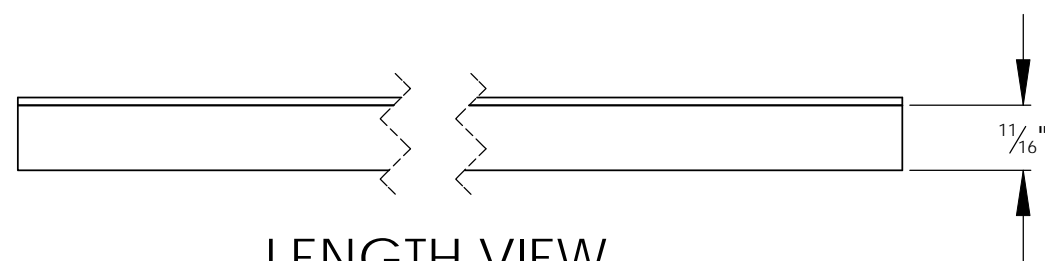

LENGTH VIEW



TREAD RAILS ARE JOINED WITH RECYCLED LDPE HINGES THAT DO NOT SHRINK OR CRACK IN UV LIGHT OR WITH CHANGE IN TEMPERATURE. TREADS ARE HELD IN PLACE BY END CLAMPS, WHICH CREATE A CLEAN EDGE AND ELIMINATE THE NEED FOR RIVETS. ULTRASORB TREAD STANDS UP TO HEAVY TRAFFIC AND ABSORBS MORE THAN THREE TIMES THE DIRT AND MOISTURE AS STANDARD CARPET. ULTRASORB TREADS ARE RECOMMENDED FOR INTERIOR USE. THIS PRODUCT HAS A FIVE YEAR WARRANTY.

## DETAIL NOTES:

- 1-TREAD RAILS MUST RUN PERPENDICULAR TO TRAFFIC DIRECTION.
- 2-GRATE DIMENSIONS ALLOW FOR CLEARANCE BETWEEN GRATE SECTIONS AND FRAME IN THE WIDTH DIMENSION ONLY.
- 3-TRIM THE FILLER TO ENSURE A TIGHT FIT IN THE TRAFFIC DIMENSION

## SPECIFICATIONS:

GRATEDESIGN MODEL G-150U HAS OUR 100% POLYAMIDE FIBERS 80 D'TEX AND 40 D'TEX TUFTED NYLON CLASS 1 FIRE RATED TREAD SECURED WITH END CAP. RAILS ARE MADE WITH 6063-T52 ALLOY RAILS AND ARE 3/4" (91.1MM) DEEP AND, SPACED 1-1/2" (38.1MM) ON CENTER. FRAMES USED WITH THE G-150U ARE: TYPE F-11OR TYPE F-14 FRAMES WHICH ARE MADE OF ALUMINUM.

 Always right there.	 Arden Architectural Specialties, Inc. 9300 73rd Avenue North Brooklyn Park, MN 55428
JOB REF.	
MODEL NO. <b>G-150U</b>	
RELEASED DATE	1/5/2011 SHEET 1 OF 1