





G-575P ALUMINUM SERRATED GRATE DETAIL

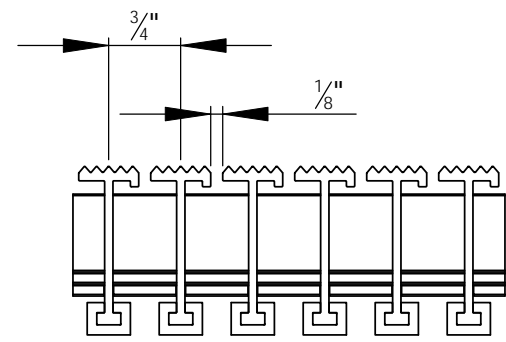

WIDTH VIEW

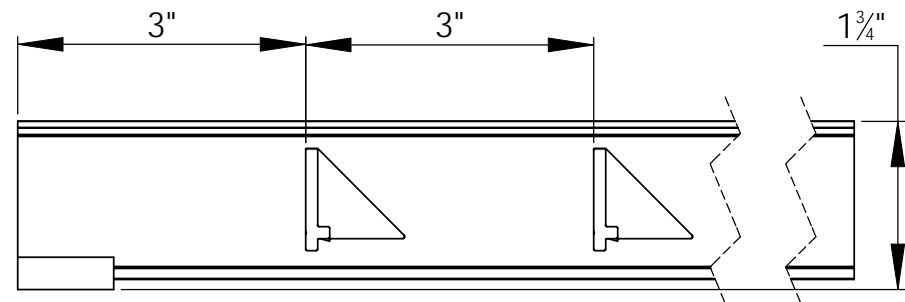

LENGTH VIEW

SERRATED TREAD RAILS SCRAPE MORE DIRT FROM SHOES AND PROVIDE ADDITIONAL SLIP RESISTANCE RAILS AND CAN BE FABRICATED WITH CURVES AND ANGLES. CONSTRUCTED WITH STURDY KEYLOCKS EVERY THREE INCHES, THIN LINE GRATES CAN STAND UP TO ALMOST ANY TRAFFIC.

DETAIL NOTES:

- 1-TREAD RAILS MUST RUN PERPENDICULAR TO TRAFFIC DIRECTION.
- 2-TRAFFIC DIRECTION DIMENSION CAN ONLY BE CHANGED IN 3/4" (19.1MM) INCREMENTS UNLESS ALUMINUM FILLER IS ATTACHED TO THE FRAME.
- 3-GRATE DIMENSIONS ALLOW FOR CLEARANCE BETWEEN GRATE SECTIONS AND FRAME IN THE WIDTH DIMENSION.

SPECIFICATIONS:

GRATEDESIGN MODEL G-575P HAS OUR SERRATED RAIL WITH CONTINUOUS SERRATIONS. RAILS ARE MADE WITH 6063-T52 ALLOY RAILS AND ARE 1-3/4" (44.5MM) DEEP AND, SPACED 3/4" (19.1MM) ON CENTER. WITH KEYLOCKS SPACED 3" (76.2MM) ON CENTER. FRAMES USED WITH THE G-575P ARE: TYPE F-1LEVEL BED; TYPE F-LANG LARGE ANGLE; TYPE F-2 DEEP PIT; TYPE F-2T THIN SLAB FRAMES WHICH ARE MADE OF ALUMINUM.

	<p>Arden Architectural Specialties, Inc. 9300 73rd Avenue North Brooklyn Park, MN 55428</p>	
		<p>JOB REF.</p>
<p>MODEL NO. G-575P</p>		
<p>RELEASED DATE</p>	<p>1/5/2011</p>	<p>SHEET 1 OF 1</p>