


WIDTH VIEW

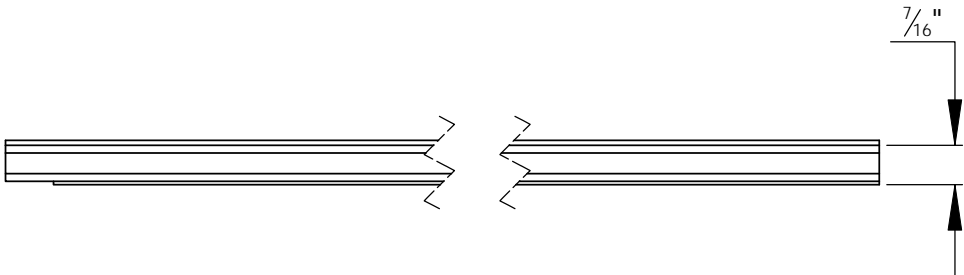

LENGTH VIEW

OUR ALUMINUM HINGE ROLL-UP MATS HAVE ALL ALUMINUM RAILS. UNLIKE MATS WITH HIDDEN VINYL UNDER-CHANNELS OR VINYL RAILS, ALUMINUM RAIL MATS ARE SUITABLE FOR COMMERCIAL APPLICATIONS. THEY MAINTAIN THEIR INTEGRITY IN ALL WEATHER SO THE TREADS STAY IN THE RAILS

- DETAIL NOTES:
- 1-TREAD RAILS MUST RUN PERPENDICULAR TO TRAFFIC DIRECTION.
 - 2-MAT DIMENSIONS ALLOW FOR CLEARANCE BETWEEN MAT SECTIONS AND FRAME IN THE WIDTH DIMENSION ONLY.
 - 3-TRIM THE FILLER TO ENSURE A TIGHT FIT IN THE TRAFFIC DIMENSION

SPECIFICATIONS:

MATDESIGN MODEL M-600 HAS OUR STANDARD CARPET WITH 17 DENIER DYED NYLON TREAD WITH TREADS OF 28OZ/YD SQ (949G/M SQ) SOLUTION. RAILS ARE MADE WITH 6063-T52 ALLOY RAILS AND ARE 3/8" (9.5MM) DEEP AND, SPACED 2" (50.8MM) ON CENTER. FRAMES USED WITH THE M-600 ARE: TYPE F-3 RECESSED; TYPE F-4 SURFACE MOUNT; TYPE F-6 THIN LINE; F-6R THIN LINE CAST IN PLACE FRAMES WHICH ARE MADE OF ALUMINUM. IN ADDITION OUR F-5 SURFACE FRAME IS AVAILABLE IN VINYL.



Arden
Architectural
Specialties, Inc.™
9300 73rd Avenue North
Brooklyn Park, MN 55428

| | | |
|------------------------|----------|--------------|
| JOB REF. | | |
| MODEL NO. M-600 | | |
| RELEASED DATE | 1/5/2011 | SHEET 1 OF 1 |