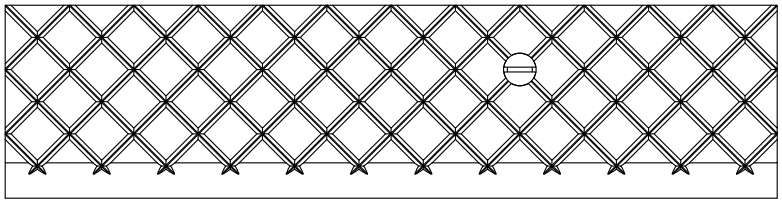

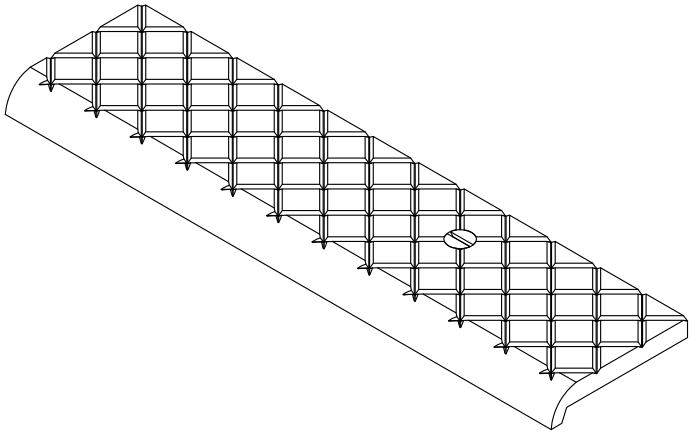

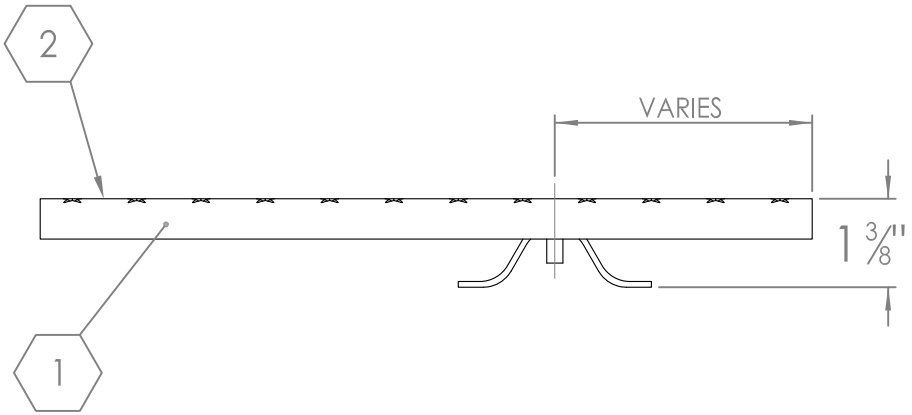

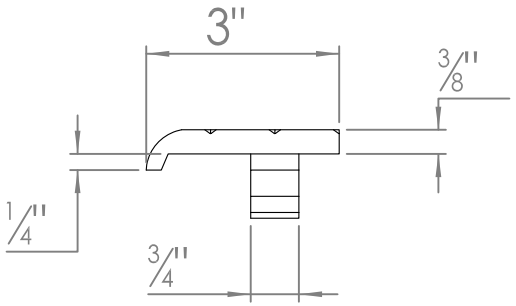

SPECIFICATIONS:

1. **BASE**: GRAY CAST IRON
2. **ABRASIVE**: SILICON CARBIDE ABRASIVE ,CROSSHATCH PATTERN 1/32" THICK
3. **FINISH:** BLACK PAINT
4. **POURED CONCRETE STAIRS:** NOSING SHALL TERMINATE NO MORE THEN 3" FROM END OF STEPS
5. **LENGTH:** 5'6" MAXIMUM
6. **WING ANCHORS:** STANDARD FOR POURED CONCRETE APPLICATIONS

LENGTH	QTY

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

PROJECT:	
ARCHITECT:	
CONTRACTOR:	
QTY:	
PART#:	**BSTCI-C3W**

Babcock-Davis
Always right there.
9300 73rd Avenue North
Brooklyn Park, MN 55428

TITLE:
Stair Tread, Cast Series
3", Cast Iron Crosshatch
Short Nosing for Concrete, Wing Anchor

	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN	SJB	3/31/11	A	BSTCI-C3W	A
RELEASED	PE	3/31/11	WEIGHT: 3.25 LB/FT		SHEET 1 OF 1