
2

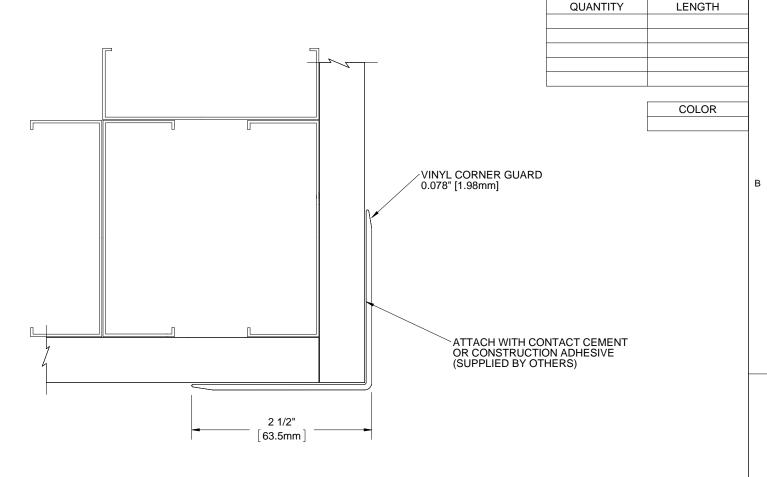

NOTES:

 PROFILE: HIGH IMPACT VINYL ACRYLIC EXTRUSION LOCKED IN PLACE, NOMINAL 0.078" (1.98mm) THICK

- CLASS A FIRE RATING, TESTED TO ASTM E84
- 3. **EXTRUSION**: PEBBLE GRAIN FINISH WHICH CONTAINS EPA REGISTERED MICRO-CHEK ANTIMICROBIAL AGENT
- 4. MAXIMUM LENGTH: VINYL CORNER GUARDS 16'
- 5. PARTITION COMPONENTS PROVIDED BY OTHERS.

PROJECT: ARCHITECT: CONTRACTOR: TITLE: 2 1/2" EXTRUDED VINYL Babcock-Davis

9300 73rd Avenue North
Brooklyn Park, MN 55428 **CORNER GUARD** NAME DATE SIZE DWG. NO. REV BCGVE25S Α MDS 24APR13 A DRAWN RELEASED PGE 01MAY13 WEIGHT: 0.25 lbs/ft SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

2

1