
2

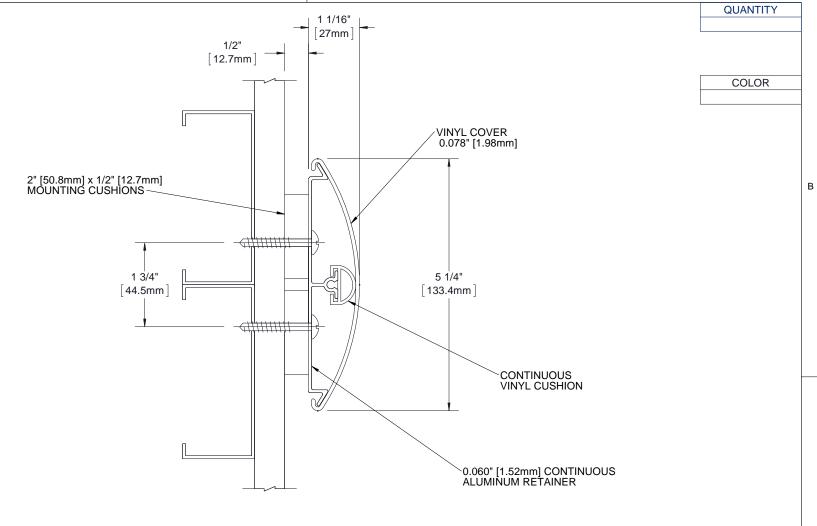

NOTES:

Α

В

- . PROFILE: HIGH IMPACT VINYL ACRYLIC EXTRUSION LOCKED IN PLACE, NOMINAL 0.078" (1.98mm) THICK,
- 2. CLASS A FIRE RATING, TESTED TO ASTM E84
- 3. RETAINER: CONTINUOUS 6063 T-5 ALUMINUM RETAINER, NOMINAL 0.060" (1.52mm) THICK
- 4. EXTRUSION: PEBBLE GRAIN FINISH WHICH CONTAINS EPA REGISTERED MICRO-CHEK ANTIMICROBIAL AGENT
- 5. VINYL CRASH RAIL LENGTH: PROVIDED IN 20' CONTINUOUS SECTIONS
- 6. END CAP: #BCRVS5C-ECT, OUTSIDE CORNER: #BCRVS5C-OCT, 135 DEG OUTSIDE CORNER: #BCRVS5C-OC135, SPLICE KIT: #BCRVS5C-SK
- 7. FASTENERS AND PARTITION COMPONENTS PROVIDED BY OTHERS.

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

	PROJECT:							
Т	ARCHITECT:							
	CONTRACTOR:							
		6)			TITLE:	5" VINYL CRASH RA	AIL.	
5,	Babcock-Davis® 9300 73rd Avenue North Brooklyn Park, MN 55428				CRESCENT SHAPE, SURFACE MOUNT 1/2" CUSHION, CONTINUOUS RETAINER			
		NAME	DATE	SIZE	DWG. NO.			REV
İ	DRAWN	MDS	26APR13	Α		BCRVS5C-C05		Α
	RELEASED	RELEASED PGE 01MAY13 WE			IGHT: 0.90 lb	s/ft	SHEET 1	OF 1