


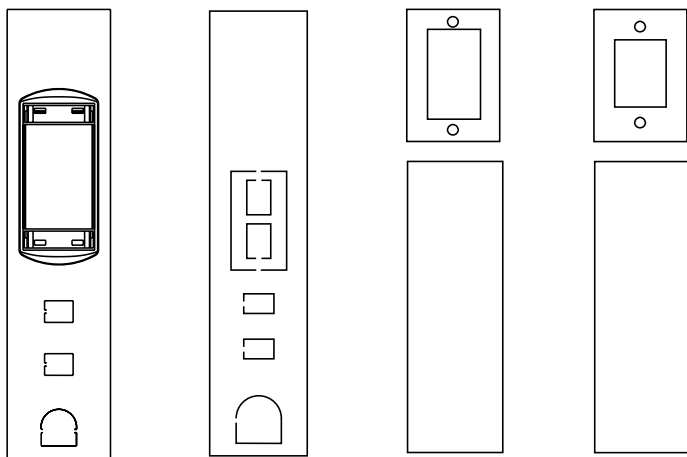


**30TC-3S2
w/Bezel
installed**


30TC-CVR

30TP-C


30TP-L



30TP-J
(1.59" [40.39mm]
diameter)



30TP-A
(1.40" [35.56mm]
diameter)



30TP-B




The Wiremold Company
U.S. and International:
60 Woodlawn Street • West Hartford, CT 06110
1-800-621-0049 • FAX 860-232-2062 • Outside U.S. 860-233-6251
Canada:
850 Gartshore Street • Fergus, Ontario N1M 2W8
1-800-741-7957 • FAX 519-843-5980




30TC-4V / 30TP-4V Series Tele-Power® Poles INSTALLATION INSTRUCTIONS

Wiremold Electrical Systems conform to and should be properly grounded in compliance with requirements of the current National Code or codes administered by local authorities.

All electrical products may represent a possible shock or fire hazard if improperly installed or used. Wiremold electrical products are UL listed, made for interior use in dry locations only and should be installed in conformance with current local and/or the National Electrical Code.

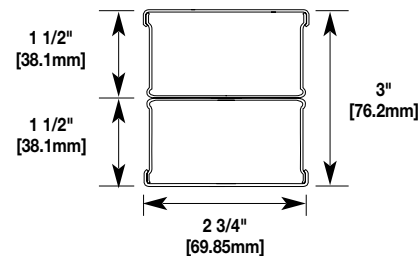

30TP-4V / 30TC-4V**

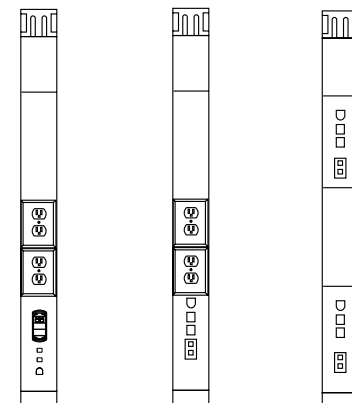

**30TP-4V3S2
30TP-412V3S2**

30TP-4V

30TC-4V**


RACEWAY WIRE AND CABLE FILL CAPACITIES FOR TELE-POWER POLES - POWER*					
Cable Type	Cable Wire/Size	O.D.		30TP- 4V Series	30TC- 4V Series**
	Description	(inches)	(mm)	40% FILL	40% FILL
THHN / THWN	10 Awg	0.16	4.17	30	66
	12 Awg	0.13	3.30	48	106

RACEWAY WIRE AND CABLE FILL CAPACITIES FOR TELE-POWER POLES - COMMUNICATIONS*							
Cable Type	Cable Wire/Size	O.D.		30TP- 4V Series		30TC- 4V Series**	
	Description	(inches)	(mm)	20% FILL	40% FILL	20% FILL	40% FILL
Unshielded Twisted Pair	Cat. 5 UTP	0.22	5.59	18	37	18	37
	Cat. 3 UTP	0.19	4.83	25	50	25	50
Telephone	2 Pair	0.14	3.56	46	91	46	91
	3 Pair	0.15	3.81	40	79	40	79
	4 Pair	0.19	4.83	25	50	25	50
	25 Pair	0.41	10.41	5	11	5	11
Coaxial	RG58/U	0.20	4.95	24	47	24	47
	RG59/U	0.24	6.15	15	31	15	31
	RG62/U	0.24	6.15	15	31	15	31
	RG6/U	0.27	6.86	12	25	12	25
TwinAxial	100 Ohm	0.33	8.38	8	16	8	16
Shielded Twisted Pair	Type 1 STP	0.39	9.91	6	12	6	12
	Type 2 STP	0.47	11.81	4	8	4	8
	Type 3 STP	0.25	6.22	15	30	15	30
Fiber Optic	Fiber ZipCord	0.11	2.79	74	148	74	148
	Round Fiber 2 Strand	0.18	4.57	28	55	28	55
	Round Fiber 4 Strand	0.19	4.83	25	50	25	50
	Round Fiber 6 Strand	0.21	5.33	20	41	20	41


* Per compartment.

** 30TC-4V Series not intended for combining power and communications.


1

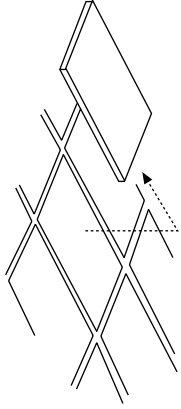


2a




2b




3




4




5a




5b




6




7a

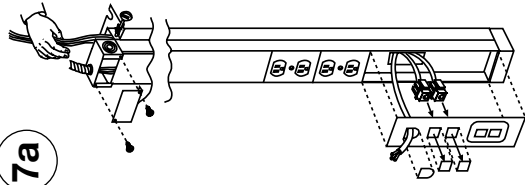


7b

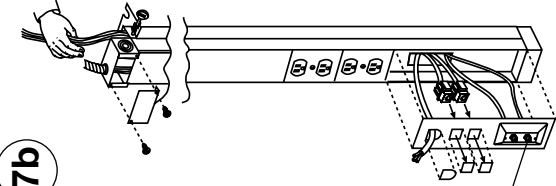

7c

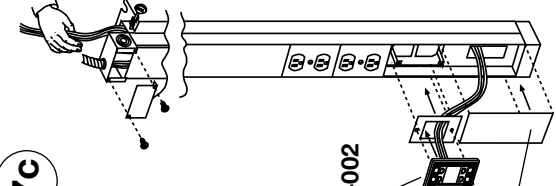

7d

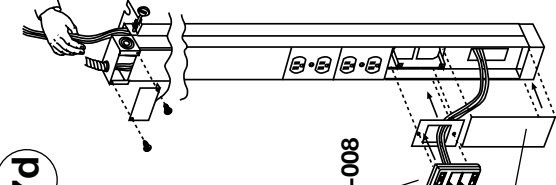

AC-MF-022

AC-SFP-002


AC-SAP-008

30TP-C


30TP-C

30TP-C


8a




8b



9a



9b

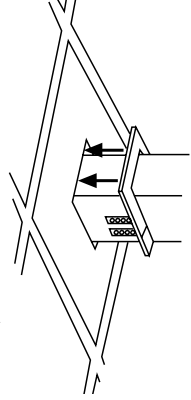

10

