

Plug-In Outlet Center® Units for use in Healthcare

The healthcare environment offers unique challenges for powering equipment in patient care areas. The medical equipment used in emergency rooms and surgical suites is constantly changing based on the needs of the patient. ULM Series of Medical Grade Plug-in Outlet Center Units (PIOCs) offer medical professionals quick and flexible power delivery in these demanding patient care environments.

For those areas of your healthcare facility that are not used for patient care, such as Admissions, Human Resources, Purchasing, etc., we offer ULBH Series Special Use PIOCs.

The ULM and ULBH Series offer both flexibility and durability to keep your power infrastructure healthy and strong. So remember Legrand when you are seeking innovative solutions to your ever changing power infrastructure needs.



ULM6-6 Medical Grade Plug-In Outlet Center Unit.

FEATURES & BENEFITS

ULM Series Plug-In Outlet Center Units* feature:

- **Safety Certified by TUV Rheinland.** Complies with UL60601-1, the Standard for Medical Electrical Equipment. Can be used in patient care areas in compliance with Article 517 of the National Electrical Code (NEC). Allows for maximum flexibility when powering patient care equipment.
- **Redundant bonding of the enclosure as required by UL60601-1.** Assures an ultra reliable grounding path is provided. Proper grounding of medical equipment is essential for patient well-being.
- **Rugged aluminum housing.** Withstands the rigors of the healthcare environment assuring a long service life.
- **Pass & Seymour® Hospital Grade Receptacles.** Superior quality receptacles are used to ensure reliable connections and long life.
- **15A and 20A configurations.** 20A configuration meets the ever increasing power demands of medical equipment. Expand your capabilities without having to expand your infrastructure.

* As with all Medical Electrical Devices, Wiremold® ULM Series PIOCs should only be used under the direction and supervision of your local Health & Safety Officer.

ULBH Series Plug-In Outlet Center Units feature:

- **Safety Certified by UL.** Complies with UL1363, the Standard for Relocatable Power Taps. Provides full protection for staff personnel, while affording maximum flexibility.
- **Rugged aluminum housing.** Withstands the rigors of the healthcare environment assuring a long service life.
- **Pass & Seymour® Hospital Grade Receptacles.** Superior quality receptacles are used to ensure reliable connections and long life.
- **15A configuration.** Provides more than adequate capacity for non patient care areas.


Medical Plug-In Outlet Center Units Quick Selection Guide

| Medical Plug-In Outlet Center Units Selection Guide | | | | | | | |
|---|--------------------------------|---------------|----------------|----------------|----------------------|-----------------------|-------------|
| Catalog No. | OK to use in Patient Care Area | Configuration | Voltage Rating | NEMA Plug Type | NEMA Receptacle Type | Number of Receptacles | Cord Length |
| ULM4-6 | Yes | 15A | 125V | 5-15P | 5-15R | 4 | 6 |
| ULM4-15 | Yes | 15A | 125V | 5-15P | 5-15R | 4 | 15 |
| ULM6-6 | Yes | 15A | 125V | 5-15P | 5-15R | 6 | 6 |
| ULM6-15 | Yes | 15A | 125V | 5-15P | 5-15R | 6 | 15 |
| ULM620-6 | Yes | 20A | 125V | 5-20P | 5-20R | 6 | 6 |
| ULM620-15 | Yes | 20A | 125V | 5-20P | 5-20R | 6 | 15 |
| ULBH4-6 | No | 15A | 125V | 5-15P | 5-15R | 4 | 6 |
| ULBH4-15 | No | 15A | 125V | 5-15P | 5-15R | 4 | 15 |
| ULBH6-6 | No | 15A | 125V | 5-15P | 5-15R | 6 | 6 |
| ULBH6-15 | No | 15A | 125V | 5-15P | 5-15R | 6 | 15 |


Medical Plug-In Outlet Center Unit Plug Configurations




5-15P



5-15R



5-20P



5-20R


Medical Plug-In Outlet Center Unit Mounting Methods

MOUNTING TYPES



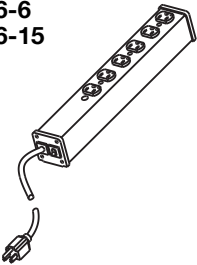

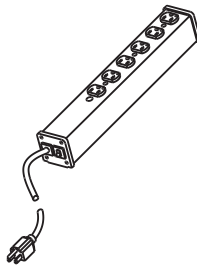

Complete mounting hardware and installation instructions are included with every unit.

Snap-On/Slide-Off



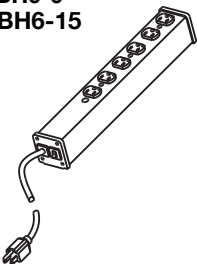

Mount unit in any position. Catalog No. 8004 includes two aluminum mounting clips that snap onto mounting rails on the back of the unit. Screws also included. Used for all units with 2" [51mm] aluminum housing.

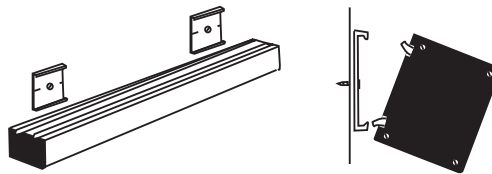

Medical Grade Plug-In Outlet Center Units Ordering Information
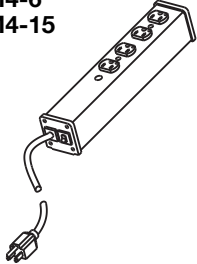
| Catalog No./Item | Description/Specifications | Catalog No./Item | Description/Specifications |
|---|--|--|---|
| ULM4-6 ULM4-15  | Medical Grade Plug-In Outlet Center Unit – 15A configuration. Four outlets, white finish. 6' [1.8m] or 15' [4.6m] cord. Length 10 3/4" [237mm]. Receptacle center-to-center 1 1/2" [38mm]. cTUVus Listed as Medical Electrical Equipment. Suitable for use where Article 517 of the NEC requires Hospital Grade Outlets.  | ULM6-6 ULM6-15  | Medical Grade Plug-In Outlet Center Unit – 15A configuration. Six outlets, white finish. 6' [1.8m] or 15' [4.6m] cord. Length 13 1/4" [337mm]. Receptacle center-to-center 1 1/2" [38mm]. cTUVus Listed as Medical Electrical Equipment. Suitable for use where Article 517 of the NEC requires Hospital Grade Outlets.  |
| ULM620-6 ULM620-15  | Medical Grade Plug-In Outlet Center Unit – 20A configuration. Four outlets, white finish. 6' [1.8m] or 15' [4.6m] cord. Length 10 3/4" [237mm]. Receptacle center-to-center 1 1/2" [38mm]. cTUVus Listed as Medical Electrical Equipment. Suitable for use where Article 517 of the NEC requires Hospital Grade Outlets.  | | |

Special Use Plug-In Outlet Centers Ordering Information
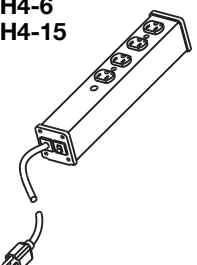
| Catalog No./Item | Description/Specifications | Catalog No./Item | Description/Specifications |
|---|--|--|---|
| ULBH4-6 ULBH4-15  | Special Use Plug-In Outlet Center Unit – 15A configuration. Four outlets, white finish. 6' [1.8m] or 15' [4.6m] cord. Length 10 3/4" [237mm]. Receptacle center-to-center 1 1/2" [38mm]. Not for use where Article 517 of the NEC requires Hospital Grade Outlets. <div style="border: 1px solid black; padding: 5px; text-align: center; margin-top: 10px;"> IMPORTANT Not for use in general care or </div>  | ULBH6-6 ULBH6-15  | Special Use Plug-In Outlet Center Unit – 15A configuration. Six outlets, white finish. 6' [1.8m] or 15' [4.6m] cord. Length 13 1/4" [337mm]. Receptacle center-to-center 1 1/2" [38mm]. Not for use where Article 517 of the NEC requires Hospital Grade Outlets. <div style="border: 1px solid black; padding: 5px; text-align: center; margin-top: 10px;"> IMPORTANT Not for use in general care or </div>  |



Electrical Wiring Systems

60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295-3472)
www.legrand.us

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
Phone: 905.738.9195
www.legrand.ca

