



ARCHITECTURAL SYSTEM FOR LIGHT COMMERCIAL AND INSTITUTIONAL

1-1/2" ARCHITECTURAL SNAP-LOCK PANEL SYSTEM

The Englert Series 1500 integral snap lock panel system combines architectural versatility – with cleanly detailed, continuous seam transitions from roof to mansard, fascia, wall panel or soffit. The panel system consists of an integral narrow batten cap seam that snaps over a rigid, continuous interlocking leg, creating a rugged yet aesthetically pleasing architectural roof panel system.

SYSTEM APPLICATIONS

- Medium duty for residential, light commercial and industrial use
- 3"/12" minimum slope requirement
- “Site specific” engineering available for various panel sizes and substrates upon request

SUBSTRATES

- 26, 24, and 22 gauge steel
- .032" and .040" aluminum
- .018 TCSII by Follansbee Steel



FINISHES

The Englert Series 1500 system is available in a wide variety of coatings and colors. See the Englert color card for our full range of standard, full strength Kynar, low-gloss/ULTRA-Cool™ colors and paint system specifications.

Englert can match the color of virtually any material – including brick, wood and fabric. Custom colors are available in quantities as low as 5,000 lbs. in both steel and aluminum.

SYSTEM WARRANTIES


- Galvalume Plus® – 25 year steel warranty on acrylic coated Galvalume®
- Perma-color 3500 – 35 year steel or aluminum warranty on ULTRA-Cool™/low-gloss Kynar 500® coatings
- Perma-Metallic 2000 – 20 year steel or aluminum warranty on Kynar 500® coating
- 5, 10, 15 and 20 year weathertightness warranties are available

RATINGS AND CERTIFICATIONS

- UL-90 rated over plywood. (Pending)
- Florida building code approvals. (Pending)
- ASTM E-84 Class A fire rating on coating & substrate



Series 1500 1-1/2" Integral Snap-Lock

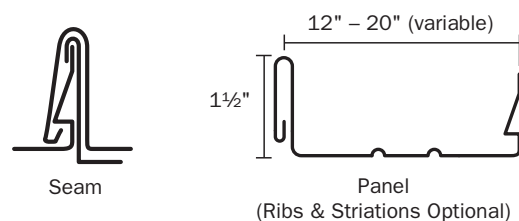

Kynar 500® is a registered trademark of Atochem. N.A.
Galvalume® and Galvalume Plus® are registered trademarks of BIEC International, Inc.
ULTRA-Cool™ is a trademark of BASF.

Copyright ©2011 Englert Inc. All rights reserved.

90111E

Distributed by: