

# E-Grip™ II

flooring adhesive



**E-Grip II™** is a low VOC, one-component urethane adhesive with excellent trowelability and superior tack properties. It is formulated specifically for use with Dodge-Regupol recycled rubber flooring systems.

**E-Grip II** is a moisture cured, non-sag, permanently elastic adhesive that has excellent adhesion to elastomers, concrete and wood and is engineered for indoor and even outdoor applications.


**E-Grip II** is available in 5 (AC1000) and 2½ (AC1001) gallon pails.

## E-Grip II has...

- **Improved Trowelability** — Installers will experience less fatigue spreading E-Grip II.
- **Better Consistency** — Mixing is no longer required.
- **Greater Initial Tack** — Improved tack helps keep the rubber flooring and seams flat and secure.
- **Simplified Application** — All ECOsurfaces rubber flooring products (rolls, tiles, pavers and underlayments) can be installed indoors using a standard 1/16 inch square notch trowel - each 5 gallon pail contains a free replaceable trowel blade.
- **Very Low Odor** — No annoying vapors or smells.
- **Superior VOC performance**

## E-Grip II delivers...

- 50% lower VOCs than the most demanding U.S. Standard (SCAQMD Rule 1168)

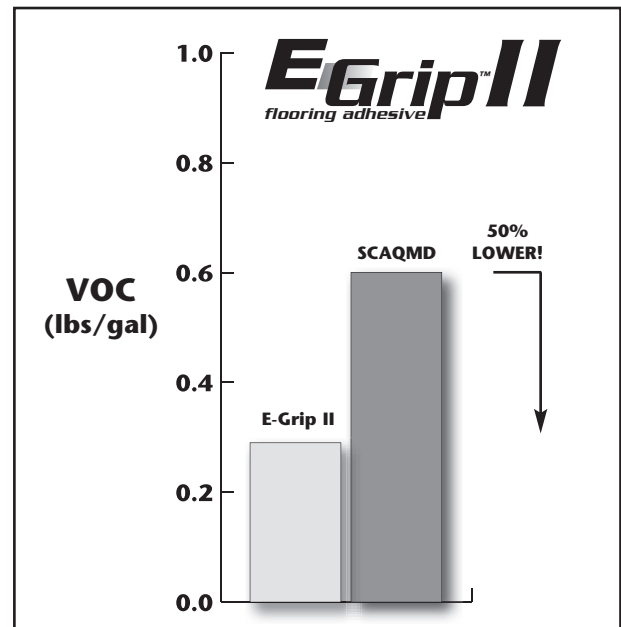

Note: SCAQMD is the California "South Coast Air Quality Management District" Rule 1168 for adhesive flooring and sealant applications. The VOC content in E-Grip II is low enough to comply with all adhesive applications listed by the SCAQMD... not just Rubber Flooring Adhesive.

**PHYSICAL DATA**

Test	Results
Adhesive Type	One Component Polyurethane – Medium Gray Color
Adhesive Cure System	Moisture Cured
VOC Content	0.29 lb/gal (or 34 g/L)
Freeze/Thaw	Stable
Application Temperature	40° to 100°F
Moisture Vapor Emission of Concrete Subfloor	Maximum 5.5 lbs per 1000 sq ft in 24 hrs (calcium chloride test – ASTM 1869)
Flashpoint	> 200°F
Shelf Life	6 months
Working Time	30 – 40 minutes
Trowel	1/16" Square Notched Blade – all ECOsurfaces products (1)
Coverage Rate	95 sq ft per gallon (1/16" notched trowel)
Weight	5 gallon pail – 60 lbs      2-1/2 gallon pail – 31 lbs

(1) For indoor installation on concrete or plywood subfloors only. See ECOsurfaces Technical Manual for instructions.

**TECHNICAL DATA**

For Installation / Maintenance / Warranty Information, please request an ECOsurfaces Technical Manual. Complete Guide Specifications also available.

**To Order:**  
Log on to [www.ecosurfaces.com](http://www.ecosurfaces.com) or call 1-877-326-7873.

Distributed by:



**Gerbert, Ltd.**  
P.O. Box 4944  
Lancaster, PA 17604-4944

Manufactured by:



**DODGE-REGUPOL**  
INCORPORATED  
Leaders in recycled products technology  
715 Fountain Avenue  
Lancaster, PA 17601