


# NATURAL FISSURED™

Tile, Square Lay-in & Tegular  
medium texture




NATURAL FISSURED Beveled Concealed Tile with Concealed Z™ grid

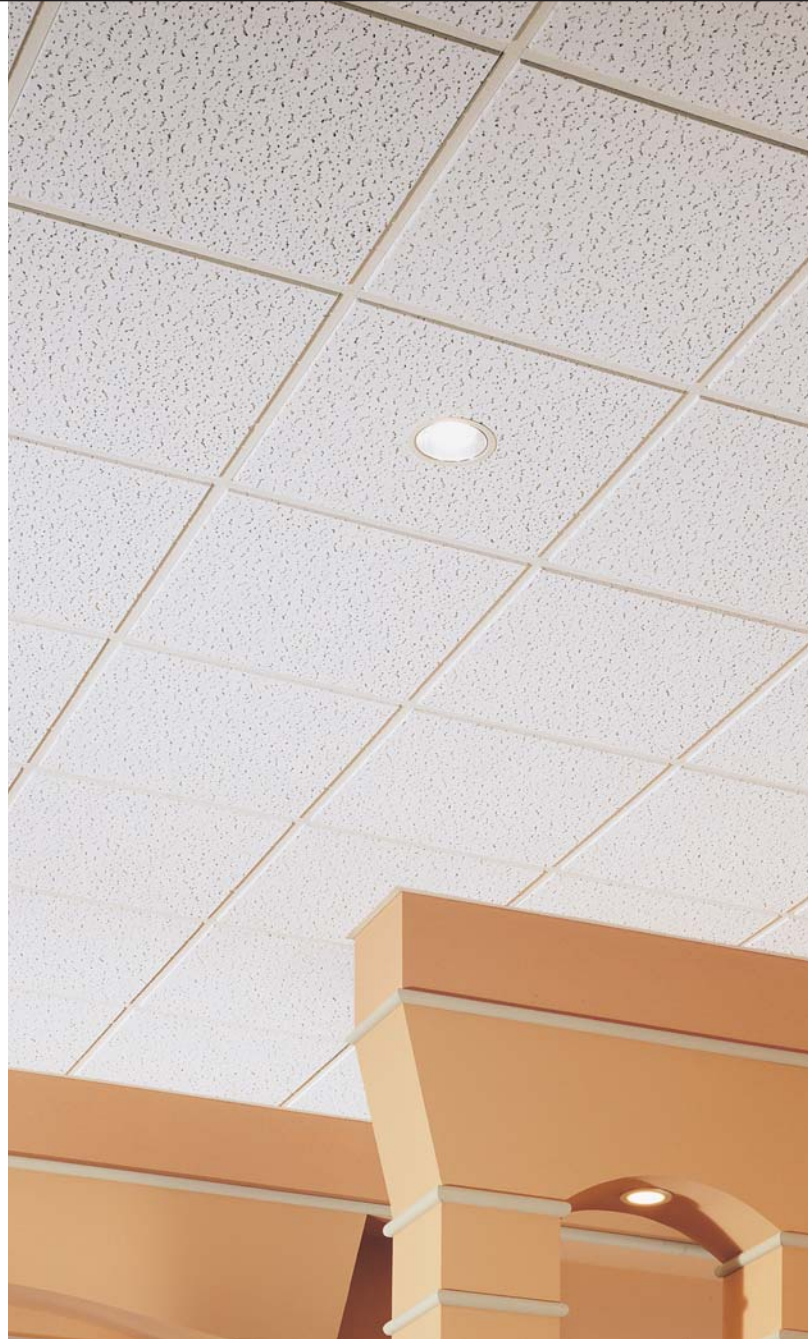

NATURAL FISSURED Angled Tegular with PRELUDE® 15/16" Exposed Tee grid


## Detail and Grid Intersections



NATURAL FISSURED  
Concealed Tile



NATURAL FISSURED  
Angled Tegular



NATURAL FISSURED  
with PRELUDE 15/16"  
Exposed Tee grid



# NATURAL FISSURED™

Tile, Square Lay-in & Tegular

medium texture

LEED Credits					
Waste Management	Recycled Content	Local Materials	Renewable Materials	Energy Performance	Daylight & Views
✓	✓	*	✓	✓	✓

\* Credit is location-dependent

## Key Selection Attributes

- Excellent sound absorption
- No visible grid with tile option
- Directional fissured image
- BioBlock™ paint on face and back of panel to inhibit or retard surface growth of mold/mildew on painted surface


## Typical Applications

- Lobbies/corridors
- Offices/conference rooms
- Dining areas/restaurants
- Retail/department stores
- Patient and exam rooms – assists in addressing HIPAA requirements\*
- Auditoriums/classrooms

## Relative Installed Cost

\$	\$\$	\$\$\$	\$\$\$\$
----	------	--------	----------

## Color



## Visual Selection

## Performance Selection

GRID FACE	EDGE PROFILE	ITEM NUMBER	DIMENSIONS	UL Classified ACOUSTICS		FIRE	SAG RESIST	ANTI-MOLD/MILDEW	ANTI-ODOR/STAIN BACTERIA	AVERAGE LIGHT REFLECT	DURABILITY
				NRC	CAC						
Concealed	Beveled K4C4	552	12 x 12 x 3/4"	0.65	35	Class A	Standard		R	0.83	Standard
		552M	300 x 300 x 19mm								
15/16"	Square Lay-in	536	24 x 24 x 3/4"	0.65	35	Class A	Standard		R	0.83	Standard
		536M	600 x 600 x 19mm								
15/16"	Angled Tegular	507	24 x 24 x 3/4"	0.65	35	Class A	Standard		R	0.83	Standard
		507M	600 x 600 x 19mm								

\* Installations in Healthcare facilities need to meet HIPAA oral privacy requirements  
Contact TechLine™ for specific information on recycled content.



## Physical Data

### Material

Wet-formed mineral fiber

### Surface Finish

Factory-applied latex paint

### Fire Performance

Class A: Flame Spread 25 or under (UL Labeled) per ASTM E 1264

### ASTM E 1264 Classification

Type III, Form 1, Pattern C D

### Recycled Content

63%

### Insulation Value

R Factor - 1.5 (BTU units)  
R Factor - 0.26 (Watts units)

### Backloading Recommendation

Contact TechLine for specific information

### Weight; Square Feet/Carton

552, 554 – 1.05 lbs/SF; 40 SF/ctn  
507, 536 – 1.05 lbs/SF; 48 SF/ctn

### Treatment for Odor- and Stain-causing Bacteria

Available upon request

### Warranty

1-year limited warranty.  
Details: armstrong.com/ceilings

### Application Considerations

Item 554

12" x 12" square edge tiles:  
Not recommended in applications where indirect lighting or grazing lighting is used

## Recommended Suspension System

ITEMS	SUSPENSION SYSTEM
507	15/16" PRELUDE®
536	15/16" PRELUDE
552	PRELUDE Concealed CONCEALED Z™ grid or glue
554	PRELUDE Concealed CONCEALED Z grid or glue

TechLine™ / 1 877 ARMSTRONG  
1 877 276 7876

armstrong.com/ceilings

CS-3033-1205

© AWI Licensing Company, 2005 • Printed in the United States of America • 10% post consumer waste. Printed with vegetable inks. ♻️ Recyclable.