
## Product Cut Sheet: M-1500 / M-1700 Vertical Blind Headrail System

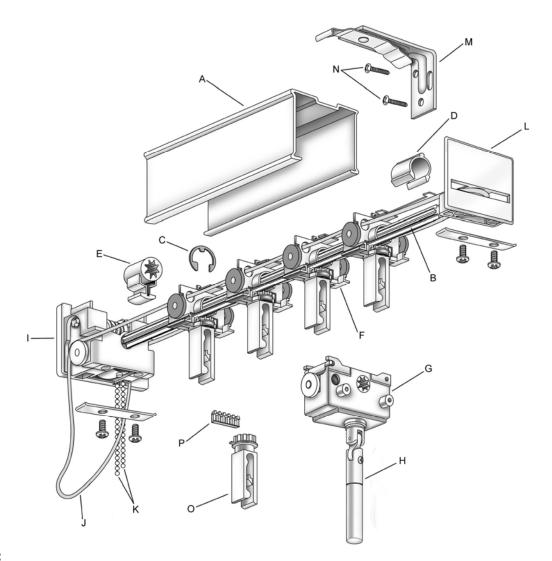

## Parts:

- A) Headrail Aluminum
- B) Pinion Rod (Tilt Rod) 8 Prong
- C) Stop C Clip
- D) Spacer Clip
- E) Traverse Lock Spacer
- F) Carrier
- G) Wand Control
- H) Wand
- I) End Control

- J) Nylon Cord
- K) Chain #6 N.P.S. (Nickel Plated Steel)
- L) Idle End
- M) Installation Bracket with Ceiling Clamp
- N) Installation Screws
- O) Replaceable Carrier Stem
- P) Replaceable Carrier Gear

## **System Features:**

- 8-Prong Pinion Strap System
- Self-Aligning Wheeled Carrier with Replaceable Stem and Gear
- Self-Lubricated Acetal parts
- Reinforced Strap between Carriers

## **Headrail Options:**

- M-1500 Headrail = Cord & Chain Control
- M-1700 Headrail = Wand Control (Safety Track)

Mariak Contract Ph: (800) 562-7425 575 W. Manville Street Fx: (800) 459-6999 Rancho Dominguez, CA 90220 www.mariak.com



# Product Cut Sheet: M-1500 / M-1700 Vertical Blind Headrail System

## Headrail:



- Available in White or Ivory baked enamel
- Aluminum Alloy 1 3/8" x 1 1/4" high
- Minimum wall thickness 0.040"

#### Controls:



## **Cord & Chain Control Option**

- Reduction control is made of acetal plastic which allows for precise control of light using #6 N.P.S. chain
- End controls are covered to enclose sprockets and the rotating tilt rod ends
- Traverse cord roller allows extended cord life and ease of operation

## Wand Control Option (Safety Track)



- Equipped with a left and right idler end which holds the tilt rod and covers both ends of the
- Control made of acetal plastic with a reduction gear
- Firmly encircles the tilt rod which provides smooth rotation

#### Carriers:



- Molded in acetal plastic with strap links
- A self-aligning carrier feature allows uniform rotation
- Two independent self-lubricating wheels for easy traversing
- Rotation of the louver is controlled by the precision-molded rack and pinion gear
- Replaceable louver hanger system allows for fast and efficient repair without disassembling the headrail

## **Rotation:**



## **Cord & Chain Control Option**

- #6 N.P.S. (Nickel Plated Steel) chain
- 8-prong tilt rod is made of extruded aluminum
- Tilt rod passes through all the louver carriers, providing rotation to each louver by means of a precision-molded rack and pinion gear system

## Wand Control Option (Safety Track)



Provides 180° rotation to each louver simultaneously through a gear system in the control housing, turning the 8-prong tilt rod

## Stacking:

- One Way Draw (Left or Right)
- Split-Draw (Center Opening)
- Center Stack (Side Opening)
- Blind traverses by means of a synthetic traverse cord or wand control pull









Left Stack

Right Stack

Center Stack

## **Louver Spacing:**

- Plastic strap link system
- Normal louver spacing has a 3/8" overlap
- Available in 2" and 3 1/2" louvers

## **Mounting Hardware:**

A variety of installation clips and brackets are available





## Size Recommendations:

- Maximum Width 192'
- Maximum Drop 144"

