


Product Cut Sheet: Fauxwood Horizontal Blind System

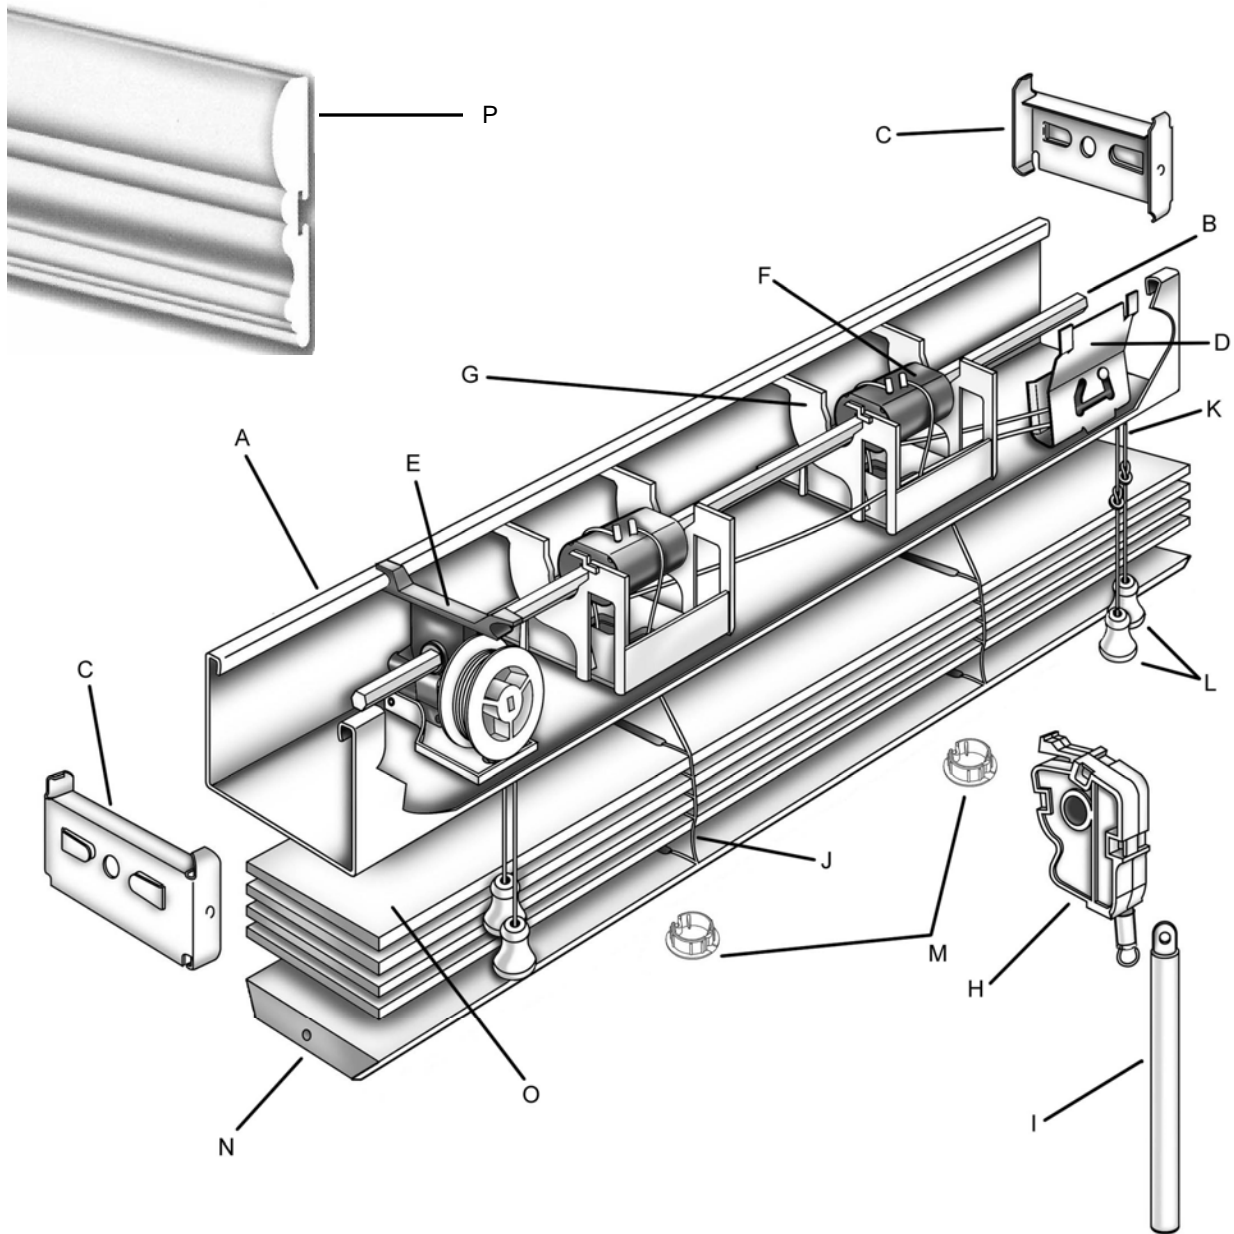

Parts:

- | | |
|--------------------------------------|-----------------------------|
| A) Low Profile Headrail – Steel | I) Wand |
| B) Pinion Rod (Tilt Rod) – Hexagonal | J) Cord Ladder |
| C) End Stiffeners | K) Lift Cord 1.8mm |
| D) Cord Lock | L) Cord Tassels |
| E) Cord Tilter | M) Bottomrail Plugs |
| F) Tape Drum (Ladder Drum) | N) Bottomrail – Trapezoid |
| G) Tape Drum Support (Cradle) | O) Slats |
| H) Wand Tilter | P) Royal Valance – Standard |

System Features:

- Heavy Duty Metal and Plastic Components
- Cord Tilter has a metal gear offering a smooth and quiet rotation
- Wand Tilter has a metal gear and metal stem making in the strongest tilter in the industry
- Trapezoid bottomrail allows for very tight slat closure when tilting

Mariak Contract
 575 West Manville Street
 Rancho Dominguez, CA 90220

Ph: (800) 562-7425
 Fx: (800) 459-6999
 www.mariak.com

Mariak
 Contract

Product Cut Sheet: Fauxwood Horizontal Blind System

Blind (Material) Options:

- Fauxwood – Poly Vinyl Chloride (PVC) 2" or 2 1/2"



Headrail:

- Polyester baked enamel – color coordinated
- Phosphate treated steel – 2" x 1 1/2" high
- Wall thickness – 0.018" (before paint)

Valance Options: (Color Coordinated)

- Royal Valance – 3 1/4" high
- Available for Fauxwood

Bottomrail: (Color Coordinated)

- Trapezoid shade for tight slat closure

Tilt Controls:



Cord Tilt Option

- The gear and housing of the tilt mechanism are made of steel which allows the acetal thermoplastic wheel to rotate smooth and with minimal noise

Wand Tilt Option




- The gear and stem of the tilt mechanism are made of steel providing superior durability
- The worm and gear arrangement is entirely enclosed inside an acetal thermoplastic housing

Control Locations: (Restrictions may apply)

- Standard: Tilter – Left / Lift Cords – Right
- Reverse: Tilter – Right / Lift Cords – Left
- Same Left: Tilter – Left / Lift Cords – Left
- Same Right: Tilter – Right / Lift Cords – Right

Lift Control (Cord Lock):



- Snap-in design incorporates a stainless steel wear guard over which cords pass
- Incorporates a "Crash Proof" safety feature that locks the blind automatically upon release of cords

Other Headrail Channel Hardware:

- Headrail components are made of a combination of metal and low friction acetal thermoplastics
- Snap-in design of components allows for quick and easy repair if necessary

Cord Ladder: (Color Coordinated)



- Polyester braided cord ladders are designed to ensure proper control with adequate overlap of slats when in the closed position
- Options include:
 - Standard
 - Routless
 - Cloth Tape (Privacy Ladder)
 - Vinyl Tape (Privacy Ladder)

Cord Ladder Spacing:

- Maximum spacing between rout holes:
 - Fauxwood = 11"



Lift Cords: (Color Coordinated)

- 1.8mm Polyester braided cords designed for lifting and lowering the blind

Mounting Hardware:

- Universal box brackets (color coordinated)
- Center supports on blinds wider than 60"
- Extension brackets (when requested)
- Hold down brackets (when requested)



Size Recommendations:

- Minimum Width – 9"
- Minimum Drop – 9"
- Maximum Width – 96"
- Maximum Drop – 96"

The sizes listed above are merely recommendations. Blinds may be ordered larger if required. Optional 2 or 3 blinds on a single headrail are available as well.