


T15 WALL PANEL

CONDENSED
TECHNICAL
REFERENCE

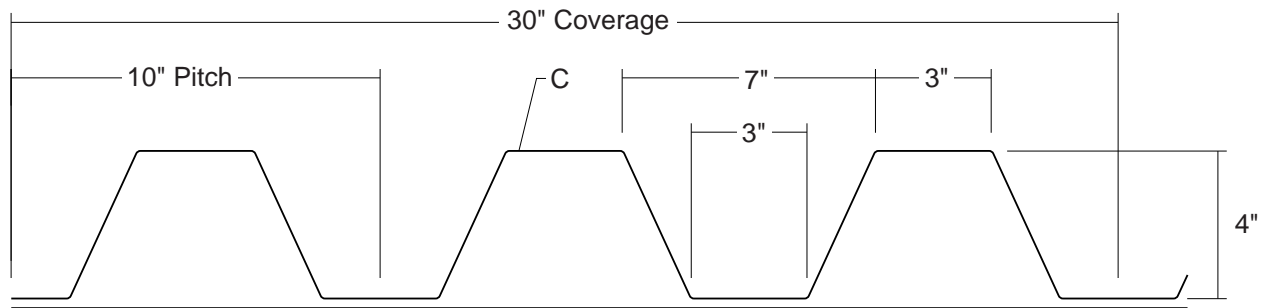

ARCHITECTURAL
COMMERCIAL
INDUSTRIAL
PANEL

DIRECT
FASTEN


30"
COVERAGE

WALL
PANEL

OPEN FRAMING OR
SOLID SUBSTRATE

PANEL OVERVIEW

- ▶ Finishes: Kynar 500 (PVDF) standard, optional; multi-pass Kynar, Marblique, Plastisol, Polyester, and MS Colorfast45[®] (SMP)
- ▶ Gauges: 24ga, 22ga, 20ga, and 18ga
- ▶ 30" panel coverage, 4" rib height
- ▶ Trapezoidal ribs on 10" centers
- ▶ Exposed Fastener Panel
- ▶ Optional material availability: Stainless Steel, Copper, and Aluminum
- ▶ Custom capabilities include:
 - Perforated panels for wind screens and liner panels

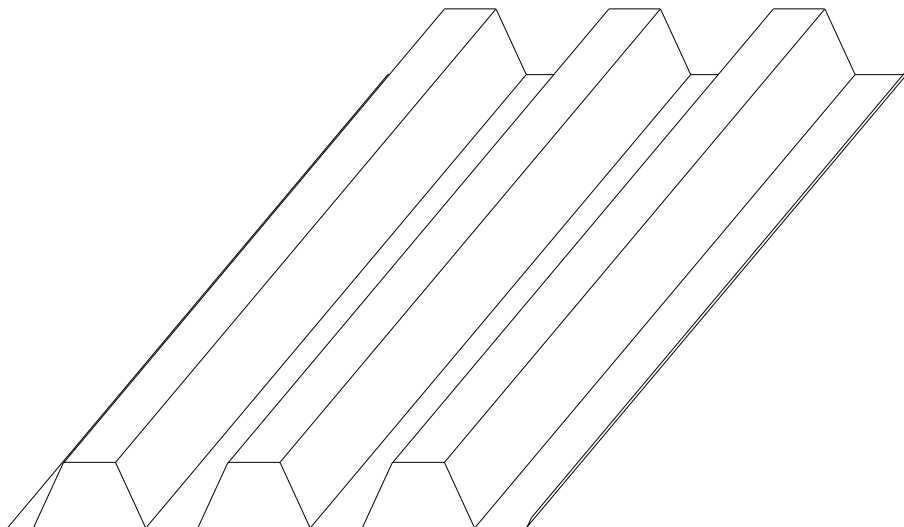


metal sales
manufacturing corporation



T15 WALL PANEL


CONDENSED TECHNICAL REFERENCE

ATTACHMENT DETAIL

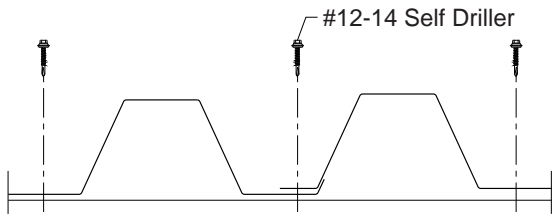

FASTENING PATTERN

Ends and Field of Panel

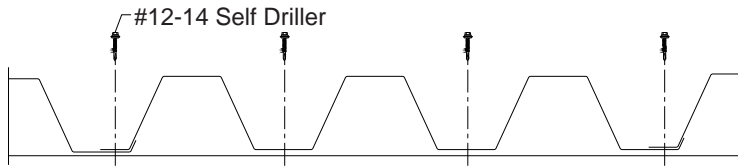

GENERAL INFORMATION

► Substructure

T15 Panels are designed to be utilized over open structural framing or a solid substrate.

► Coverage

T15 Panels are available in a 4" depth with a coverage width of 30".

► Length

Minimum factory cut length is 5'-0".
Maximum recommended panel length is 32'-0".

► Fasteners

The fastener selection guide should be consulted for choosing the proper fastener for specific applications. Quantity and type of fastener must meet necessary loading and code requirements.

NOTE: All panels are subject to surface distortion due to improperly applied fasteners. Overdriven fasteners will cause stress and induce oil canning across the face of the panel at or near the point of attachment.

► Availability

Finishes: Kynar 500 (PVDF) standard; optional: multi-pass Kynar, Marblique, Plastisol, Polyester, and MS Colorfast45® (SMP)

Gauges: 24ga, 22ga, 20ga, and 18ga

SECTION PROPERTIES

ALLOWABLE UNIFORM LOADS PSF (3 or More Equal Spans)

Ga.	Width (in.)	Yield KSI	Weight PSF	Top in Compression		Bottom in Compression		Inward Load						Outward Load					
				Ixx In ⁴ /ft	Sxx In ³ /ft	Ixx In ⁴ /ft	Sxx In ³ /ft	5'	6'	7'	8'	10'	12'	5'	6'	7'	8'	10'	12'
24	30"	50	1.42	0.6340	0.2344	0.6536	0.2635	139	109	87	71	50	37	134	103	82	66	46	33
22	30"	50	1.89	0.9792	0.3908	1.0008	0.4404	285	216	169	169	91	66	268	201	156	124	83	59
20	30"	33	2.24	1.3880	0.6137	1.3480	0.6404	339	246	185	185	95	67	328	237	179	139	91	64
18	30"	33	2.95	1.9400	0.8796	1.8640	0.9084	516	367	274	274	137	96	502	357	266	205	133	93

- Theoretical section properties have been calculated per AISI 2001. "Specifications for the Design of Cold-formed Steel Structural Members." Ixx and Sxx are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2001 specifications considering bending, shear, combined bending and shear and deflection. Allowable load considers both 3 or more equal span conditions. Allowable load does not address web crippling or fasteners/support connection. Panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase in uplift.

metal sales
manufacturing corporation



Kent, WA (800) 431-3470
Temple, TX (800) 543-4415
Longmont, CO (800) 289-7663
Antioch, TN (800) 251-8508
Woodland, CA (800) 759-6019
Rogers, MN (800) 328-9316
Spokane, WA (800) 572-6565

Jefferson, OH (800) 321-5833
Rock Island, IL (800) 747-1206
Sellersburg, IN (800) 999-7777
Jacksonville, FL (800) 394-4419
Orwigsburg, PA (800) 544-2577
Independence, MO (800) 747-0012
Fontana, CA (800) 782-7953

Anchorage, AK (866) 640-7663
Bay City, MI (888) 777-7640
Detroit Lakes, MN (888) 594-1394
Mocksville, NC (800) 228-6119